

**CATA  
LOG  
22**

**JULIUS  
BLUM  
& CO. INC.**

Juliusblum.com  
800.526.6293

Stock Components  
for Architectural  
Metal Work



B

B

B

B



B

B

B

B

B



B

B

B

B



B

B

B

B

B



B

B

B

B



B

B

B

B

B





# CATALOG 22

Villanova University, Mark B. Thompson Associates, LLC, Villanova, PA (Architect), Roy J. Shelton, Inc. (Fabricator), ML Baird & Company (Landscape Architect), Hunter Roberts Construction Group (General Contractor).

Since 1910, Julius Blum & Co., Inc. continues its tradition of excellence and innovation with the release of our latest comprehensive resource of stock components for architectural metal work.

A family business, operating under third and fourth generation leadership, Julius Blum & Co., Inc. has not lost sight of our founder's mission: to best serve our customers with prompt service and in-stock quality components.

In addition to our product descriptions, our Catalog and website contain Engineering Data to aid in the design of structurally sound and code compliant railing systems for various applications.

Additional information, including photographs of finished jobs and products, drawings files, and technical data is available online at [juliusblum.com](http://juliusblum.com). We look forward to your calls and emails.

## IN STOCK FOR PROMPT SHIPMENT

Julius Blum & Co., Inc. is unique in the industry. While most companies choose to maintain minimum stock, we have always had substantial quantities on hand of the items shown in our catalog. We take pride in our prompt service and generally ship within a day or two of receiving an order.

## SHIPPING AND PACKAGING

All components are produced and handled with great care and protected for shipment by wrapping and/or crating to assure a product well-suited for architectural metal work.

Aluminum bars, angles, channels and tubing—except for structural shapes—are stocked in mill-wrapped bundles of approximately 100 pounds. Each bundle is paper-interleaved to protect the surface during storage and shipment.

Small package shipments are made via courier service. All other shipments are by common carrier, FOB, Carlstadt NJ.

## PROTECTING THE ENVIRONMENT

With a firm belief that we must all do our part to protect the environment, Julius Blum & Co., Inc. has long worked to reduce waste in our daily operations. By using old newspapers as packing material, reusing storage boxes and bins in the warehouse, recycling unused business forms into memo pads, and placing solar panels on the roof of our building, we seek to lessen our impact on our surroundings.

The architectural metals we stock are largely composed of recycled material. We are glad to provide information on the recycled content of our material for those seeking LEED certification.

This brochure is printed on FSC® certified paper. 100% of the electricity used to make the paper is offset with Green-e® certified renewable energy. The paper contains a minimum of 10% post-consumer recovered fiber.



## JB® GLASS RAILING COMPONENTS

Features . . . . . 4  
 JB® Glass Railing Components . . . . . 6  
 Wall Brackets . . . . . 13

## TREILLAGE AND ORNAMENTAL RAILINGS PANELS

Features . . . . . 56  
 Treillage and Ornamental Collars . . . . . 57  
 Treillage and Ornamental Railing Panels . . . . . 58  
 Ornamental Panels . . . . . 64  
 Ornamental Panels and Ornaments . . . . . 65

## ELEVATOR CAB COMPONENTS

Features . . . . . 98  
 Elevator Cab Components . . . . . 99  
 Thresholds and Saddles . . . . . 100  
 Door Elevator Saddles and Handrail Mouldings . . . . . 101  
 Handrail Mouldings . . . . . 102  
 Vertical Mounting Brackets . . . . . 103  
 Glass Framing Sections . . . . . 104

## PIPE RAILINGS

Features . . . . . 14  
 Connectorail® System . . . . . 15  
 Post Brackets and Adapters . . . . . 22  
 Wall Brackets . . . . . 23  
 Center Post Brackets . . . . . 28  
 Connectorail® System Installation . . . . . 25  
 Pipe Rail Fittings . . . . . 28  
 OD Tubing and Fittings . . . . . 31

## CARLSTADT® RAILING SYSTEM

Features . . . . . 67  
 Carlstadt® Railing System . . . . . 67  
 Carlsrail® Systems for Non-Welded Assembly . . . . . 68  
 Carlstadt® Post Systems . . . . . 70  
 Carlstadt® Post Brackets . . . . . 82  
 Carlstadt® Wall Brackets and Extensions . . . . . 83  
 Carlstadt® Vertical Mounting Brackets . . . . . 84  
 Carlstadt® Center Post Brackets . . . . . 86  
 Panel Clips . . . . . 87

## DOOR EDGINGS AND VARIOUS MOULDINGS

Door Edgings and Various Mouldings . . . . . 105

## TUBING, BARS AND SHAPES

Features . . . . . 106  
 Aluminum . . . . . 108  
 Steel . . . . . 114  
 Bronze . . . . . 115  
 Nickel-Silver . . . . . 118  
 Stainless Steel . . . . . 120

## TRADITIONAL RAILING COMPONENTS

Features . . . . . 32  
 Handrail Mouldings . . . . . 34  
 Handrail Fittings . . . . . 39  
 Starting Posts . . . . . 44  
 Post and Spindles Fittings . . . . . 45  
 Spindles . . . . . 46  
 Ornamental Spindles and Valance Bars . . . . . 49  
 Bases . . . . . 50  
 Tube Sockets and Flanges . . . . . 51  
 Tubes and Collars . . . . . 52  
 Urn and Ball Finials . . . . . 53  
 Spindle Tops and Cast Rosettes . . . . . 54  
 Ball and Post Caps . . . . . 55

## HANDRAIL BRACKETS

Features . . . . . 88  
 Wall, Post, and Vertical Brackets . . . . . 89  
 Wall Brackets . . . . . 90  
 Wall & Post Bracket for Pipe Railings . . . . . 91  
 Carlstadt® Self-Aligning Wall Brackets . . . . . 92  
 Carlstadt® Self-Aligning Post Brackets . . . . . 93  
 Extensions and Anchors . . . . . 94  
 Carlstadt® Center Post Brackets . . . . . 95  
 Glass Mounting and Vertical Brackets . . . . . 96  
 Vertical Mounting Brackets . . . . . 97

## ENGINEERING DATA AND INDEX

Engineering Data . . . . . 122  
 Product Index . . . . . 130

Julius Blum & Co., Inc. supplies stock material only and does not offer custom design, fabricating or installation services. It has always been our philosophy never to compete with our customers. As Julius Blum wrote in 1938, "We want our customers to sell our goods at a profit... and for our Iron Master customers to be successful."

If you need help finding a local fabricator, we are always glad to suggest firms in your area that are familiar with our products.

### Quality Control

Providing quality material is a tradition at Blum. With very few exceptions, all components are manufactured in the USA. Understanding that the majority of our items are purchased for architectural use, we take care to provide an excellent finish. We have a dedicated staff member whose responsibility includes careful scrutiny of all incoming material. Returns are subject to approval by Julius Blum & Co., Inc.

### Finishes

Except as noted, all items shown in our catalog are supplied in a mill finish. Additional polishing, painting or anodizing of these components is not handled by Blum and would be handled by a professional polisher or the metal fabricator. For additional information on this subject, refer to the Metal Finishes Manual published by the National Association of Architectural Metal Manufacturers ([www.naamm.org](http://www.naamm.org)) and the National Ornamental & Miscellaneous Metals Association ([www.nomma.org](http://www.nomma.org)).

Dimensions, weights, and technical data published in this catalog and on our website have been assembled with care but cannot be guaranteed. Details and availability are subject to change. Please call with specific questions.

### Nickel-Silver

Julius Blum & Co., Inc. is proud to have reintroduced nickel-silver to the architectural marketplace. When finished, nickel-silver has the appearance of stainless steel with golden highlights. Like bronze, it is a copper alloy which, if left unprotected, will oxidize, although at a much slower rate. Nickel-silver is best cold-worked and may crack when worked at high temperatures. Its chemical composition is 47.7% copper, 40.9% zinc, 7.4% nickel, 2% manganese and 2% lead. Samples are available upon request.

### Bronze vs. Brass

One of the constant questions we get is, "What is the difference between bronze and brass?"

Brass and bronze are both copper alloys. In fact, architectural bronze is a sub-classification of brass—sometimes referred to as leaded brass. Blum stocks extrusions in architectural bronze, C38500, exclusively. We stock architectural bronze for several reasons:

1. It has a rich golden color as opposed to brass, which is more yellow.
2. It is more malleable than brass, making it easier to work with.
3. Architectural bronze tubing is extruded with a thicker wall (between .100" and .125" thick) than you will find in brass (usually .062" thick), making it a stronger section and better suited for bending.

All of our cast fittings and brackets are cast in alloy C86500 while our drawn pipe is stocked in alloy C23000—both of these alloys are considered a color match for architectural bronze. Because we exclusively use Architectural Bronze, our cast handrail fittings will not necessarily match with handrail supplied by others.

### Fabricating Stainless Steel

Care should be taken when working with stainless steel so as not to contaminate it with ferrous particles. This will occur if the stainless is fabricated using steel or iron tools (i.e. steel files or steel wool). Ferrous particles from steel tools will embed themselves in the stainless steel and will eventually start to rust, which makes it seem that the stainless is rusting. Recovery of the finish is possible with appropriate chemical washes, but proper fabrication will avoid the problem entirely. It is important to note that roll-formed stainless steel handrail shapes require special attention at the joints to assure proper alignment.

### Fittings

Julius Blum & Co., Inc. carries a wide range of fittings designed to match with our Connectorail® system and our traditional handrail styles. Due to differences in designs and tolerances, our fittings will not necessarily match with similar handrail and pipe supplied by others. It is important to be aware that differences in tolerances between lengths of handrail moulding and cast fittings require special attention to ensure proper match.


### Handrail and Guardrail

Julius Blum & Co., Inc. has always stocked a wide range of handrail mouldings to suit many needs and conditions, but not all Blum handrails are suitable for all applications. Accessibility standards and code authorities often have dimensional limitations on handrail size which eliminate larger handrail mouldings from

consideration. Confirm whether size limitations apply to your installation before specifying.

Most building codes differentiate between handrails and guardrails. Handrails are generally defined as being used for guidance and support, while the purpose of guardrails is to prevent accidental falls. Handrail heights are commonly between 34" and 38", while guardrails are 42" in height.

Guardrails are often required to have an included handrail.

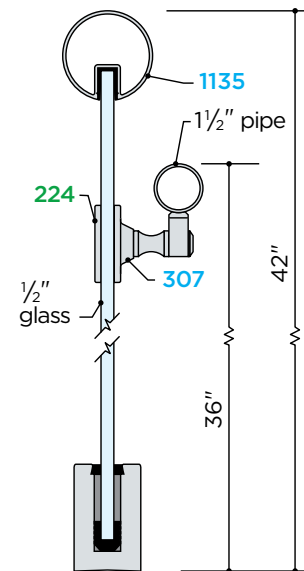

The detail above provides an example of a JB® Glass Railing used as both a guardrail and a handrail. The 3 1/2" cap rail is at a height of 42"—too high and too large for use as a handrail. A 1 1/2" pipe handrail section is mounted at a proper handrail height of 36". As shown, the handrail is mounted using a 307 bracket and a 224 glass mounting adapter kit. The tempered glass must be drilled prior to tempering to permit use of the adapter kit (see page 12 for more information).

### Structural Strength and Testing

In recent years, load requirements for handrails and guardrails have increased significantly. It is important to perform the appropriate calculations to determine the suitability of your chosen handrail and support system.

For example, many of our ornamental handrail sections, while well suited for mounting above a picket rail, would tend to exhibit too much vertical deflection when wall mounted at a standard bracket spacing of 4'-0". Bracket spacing would have to be reduced dramatically, or a structural support bar added underneath the handrail, to allow for better bracket spacing.

Blum railing systems have been developed to meet industry standards and code safety requirements when designed in accordance with engineering data and instructions provided in this catalog. Handrail brackets and fascia mountings have been tested thoroughly. Copies of test reports are available upon request.

### Construction Codes and Standards

Like all other aspects of building construction, handrails, balusters and guards must conform to various regulatory requirements. Unfortunately, the requirements are not uniform, therefore, they must be verified for the jurisdiction in which a project is located. Generally, in the United States, the following model building codes have been adopted.

International Code Council (ICC)

- International Building Code 2021
- International Residential Code 2021

The model code organizations known as BOCA, ICBO, and SBCCI merged and collaborated to develop a single model building code entitled the International Building Code (IBC), and a separate model code for one- and two-family dwellings and attached single-family dwellings not exceeding three stories entitled the International Residential Code (IRC). The IBC and IRC have gradually replaced the other model building codes in the United States.

### Americans with Disabilities Act

In addition to the applicable building code, construction must comply with the requirements of the Americans with Disabilities Act (ADA) and the Architectural Barriers Act (ABA) adopted by Congress. These laws require that all new and certain existing places of public accommodation and commercial facilities be designed and constructed to be accessible to and usable by persons with disabilities.

The Americans with Disabilities Act adopted by Congress in 1992 required circular handrails to be 1 1/4" minimum and 1 1/2" maximum. However, the Guidance on the 2010 ADA Standards for Accessible Design, published by the US Department of Justice, has now properly clarified the intent of the dimensional requirements to be an outside diameter of 1 1/4" to 2".

Americans with Disabilities Act (ADA), 2010 ADA Standards for Accessible Design.

### Code Requirements

Building code requirements and safety rules vary from one locality and from one type of structure to another, and are subject to periodic revision. Therefore, it is critical that designers acquaint themselves and comply with the various codes and regulations governing each project.

### Handrail Dimensions

At the present time, the following handrail dimensions are specified by the International Building Code, the International Residential Code and the ICC/ANSI A117.1-17 Accessible and Usable Buildings and Facilities.

**Circular Cross Section.** Handrails shall have a circular cross section with an outside diameter of 1 1/4" (32mm) minimum and 2" (51mm) maximum.

**Non-Circular Cross Section.** Handrails with other shapes shall be permitted provided they have a perimeter dimension of 4" (100mm) minimum and 6 1/4" (160mm) maximum, and provided their largest cross-section dimension is 2 1/4" (57mm) maximum.

### Handrail Clearance


During the past several years the amount of finger clearance required for handrails has been the subject of regulatory discussion. A consensus has emerged on the required clearance, based on the most predominantly enforced codes and standards. The traditional clear space between a wall or other surface and a handrail has been accepted as the most beneficial space by the following codes and standards:

- International Building Code 2021
- International Residential Code 2021
- ICC/ANSI A117.1-17

### The Access Board Guidelines

At the present time, the Access Board rules in use are from September 15, 2010. The Access Board website, [www.access-board.gov](http://www.access-board.gov), contains information on the status of each edition and explains where each edition is to be followed and the effective date.

Another current regulatory issue has been finger clearance from handrail brackets. The International Building Code 2021, ICC/ANSI A117.1-17 and the Access Board Guidelines published in the Federal Register on September 15, 2010 all contain requirements for under-handrail clearance similar to those contained in the IBC, as shown below.

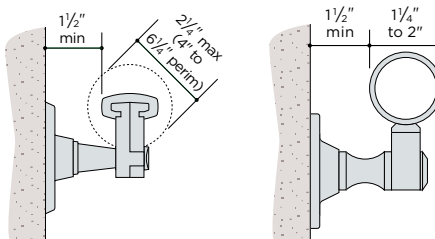

*"1014.4 Continuity. Handrail gripping surfaces shall be continuous, without interruption by newel posts or other obstructions.*

*Exceptions: 3. Handrail brackets or balusters attached to the bottom surface of the handrail that do not project horizontally beyond the sides of the handrail within 1 1/2" (38mm) of the bottom of the handrail shall not be considered obstructions. For each 0.5" (12.7mm) of additional handrail perimeter dimension above 4" (102mm), the vertical clearance dimension of 1 1/2" (38mm) shall be permitted to be reduced by 0.125" (3mm).*

The following table illustrates the approximate minimum clearance required from the bottom of a circular handrail with a perimeter of 4" or greater, to a handrail bracket.

NOMINAL IPS DIAMETER	ACTUAL OUTSIDE DIAMETER
N.A.	1.25"
1 1/4"	1.66"
1 1/2"	1.90"

OUTSIDE PERIMETER	CLEARANCE REQUIRED
3.93"	1 1/4"
5.21"	1 1/2"
5.97"	1 3/8"

### Structural Requirements

Structural requirements for handrails, guardrails and grab bars are frequently expressed in two ways: 1) an applied load distributed uniformly along the rail, and, nonconcurrently, 2) a concentrated load applied at any point along the top rail. The designer should consult the governing codes, local ordinance, project specifications and regulatory authorities to determine specific structural requirements. An excellent source of design load requirements can be found in ASCE/ANSI 7-16 Minimum Design Loads for Buildings and Other Structures published by the American Society of Civil Engineers.

The information on this page is intended to be helpful to architects and specifiers. However it is imperative to contact the appropriate local code authority for current information.

**NOMMA** **CBSCA**  
NATIONAL ORGANIZATION OF METALLURGICAL MANUFACTURERS  
 CUPRO-NICKEL BRASS SUPPLY CHAIN ASSOCIATION

© 2025 Julius Blum & Co., Inc.

We dedicate Catalog 22 to Ernie Hulsizer, our vice president for 56 years. Ernie studied metallurgical engineering at Lafayette College and holds an MBA from the Wharton School of Business.

A devoted husband, father, grandfather and great-grandfather and a lifelong Yankee fan, we wish Ernie many years of happy retirement.

# JB® GLASS RAILING COMPONENTS


**JB® Glass Railing** is a system of metal railing components for use with 1/2" or 3/4" tempered glass panels as structural balusters. Matching stock parts speed fabrication and assembly.

**Aluminum Shoe Mouldings** are designed to support a design load of 300 lbs. applied at any point at the top of a railing up to 42" in height. **Proper mounting of the shoe moulding is crucial to the strength of JB® Glass Railing. Test results are available upon request or from our website, [www.juliusblum.com](http://www.juliusblum.com).** Mechanical properties of glass may be verified with supplier of glass panels.

Shoe mouldings are supplied in two configurations and two alloys. Available for 1/2" and 3/4" tempered glass, the heavier sections, in alloy 6063-T52, may be anodized and are better suited for bending and fascia mounting. The lighter section is extruded in high-strength alloy 6061-T6 to provide the required strength with minimum weight. All three sections can be surface mounted—exposed or with a sheet metal trim—or set flush with the floor surface.

**Protective Insert prevents direct metal to glass contact and fits closely inside the recess in the handrail mouldings that are mounted to the glass with an adhesive selected at the specifier's discretion.**

**The setting block supports and cushions the lower edge of the glass while centering it in the channel of the shoe moulding. Glass panels are set in the shoe moulding using a filler selected at the discretion of the architect or fabricator. Do not use epoxy-based fillers.**

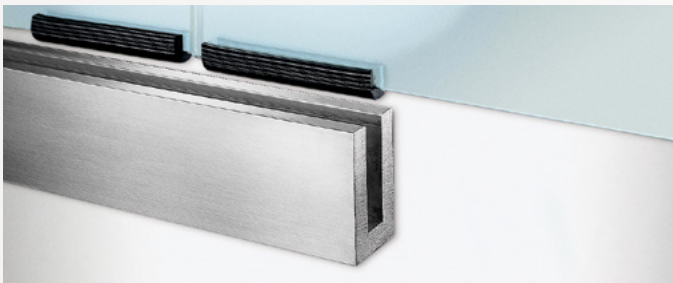

## GLASS MOUNTING

Resilient setting blocks support and cushion glass panels as they are inserted into the shoe. Setting blocks should be 4" to 6" long and placed at points 1/4" and 3/4" distance from edge of the length of the panel from each end. Space is allowed for plumbing and setting of glass—choice of filler material is at the discretion of the specifier/fabricator. Spacer blocks, 1/4" thick, should be inserted between adjoining glass panels to prevent glass to glass contact.

For matching wall-mounted or glass-mounted handrails, use Carlstadt® wall brackets with matching tubing sections or JB® Glass Railing sections and concealed, inserted closure.

The glass tempering process requires that all fabrication be completed prior to tempering. Attempts to cut, drill, or grind the edges after tempering are likely to cause breakage.

- **Aluminum** glass rail sections are extruded from alloy 6063-T52 and, when properly fabricated, are suitable for anodizing, including most of the hard-coat anodic processes. Black anodizing may result in inconsistent matches. Consult your anodizer before specifying.
- **Bronze** glass rail sections are extruded from alloy C38500, architectural bronze.
- **Nickel-Silver** extrusions are of alloy C79800. Nickel-silver is a copper alloy, similar in appearance to stainless steel with golden highlights.
- **Stainless Steel** glass rail sections are roll-formed, type 302/304 (18-8). It is important to be aware that connections of roll-formed stainless steel shapes require special attention to assure proper alignment.

Bar stock is sold mill finish except as noted. All items are carried in stock in substantial quantities for prompt shipment.




## HANDRAIL ASSEMBLY

A vinyl protective insert protects the top edge of the glass panel and fits closely inside the handrail moulding—a windshield sealer-type clear adhesive is recommended. Intermediate rails may be attached directly to the glass (holes must be drilled before tempering) using the JB® Glass-Mounted Handrail Adapter Kit and Carlstadt® wall brackets. Splice connections for tubular sections are accomplished with internal connector sleeves and structural epoxy.




Center of Theological Inquiry, Princeton, NJ, Capitol Steel Products, Inc., Trenton, NJ (Fabricator), Michael Graves Architect, Princeton, NJ (Architect), © Jeffrey Totaro, 2024 (Photo Credit).

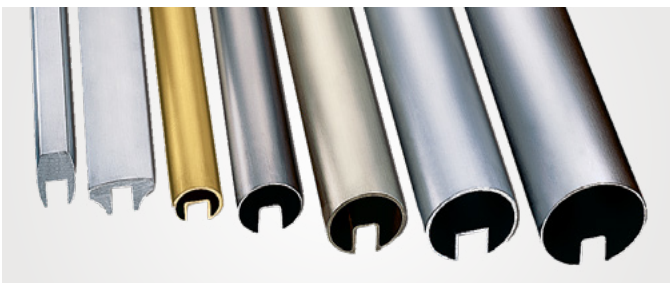

**HANDRAILS AND TUBING**

JB® Glass Railing top mouldings are available in several shapes and sizes in aluminum, bronze, nickel-silver, stainless steel, and oak acrylic/wood. Handrails may be wall mounted using Carlstadt® brackets with an anchor plug or by using available matching 1.900", 2 1/2", 3", 3 1/2" and 4" tubing. Handrails may be mounted directly to the glass using a JB® Glass-Mounted Handrail Adapter Kit with Carlstadt® wall brackets. Brackets may be mounted on 1/2" or 3/4" tempered glass using a JB® Glass-Mounted Handrail Adapter Kit.

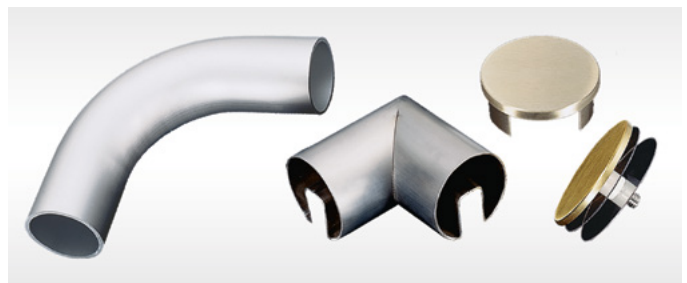


**CORNER BENDS, MITER CORNERS, END CAPS**

Radius and miter elbows match the contour of 1.900", 2 1/2", 3", 3 1/2", and 4" round tubing shapes. Either style of elbow may be used as a wall return and is attached to handrail by use of internal connector sleeves and structural adhesive. End caps are available for most sections and may be attached by structural adhesive.


**SHOE MOULDING**

Aluminum, 20' lengths  
For use with 1/2" glass, except as noted

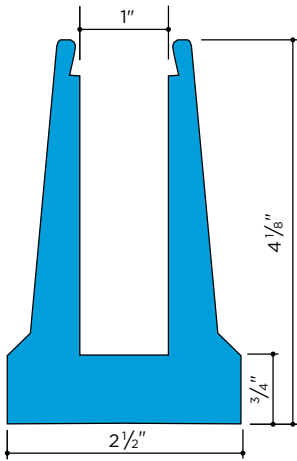


Alloy 6061-T6

● 1141 Aluminum 5.42 lb/ft

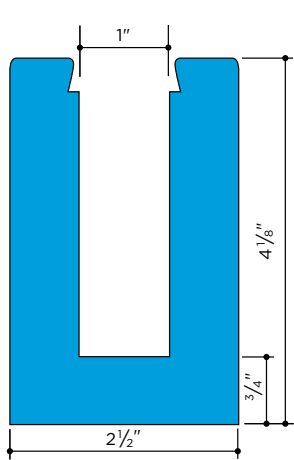

Alloy 6063-T52

● 1142 Aluminum 8.64 lb/ft

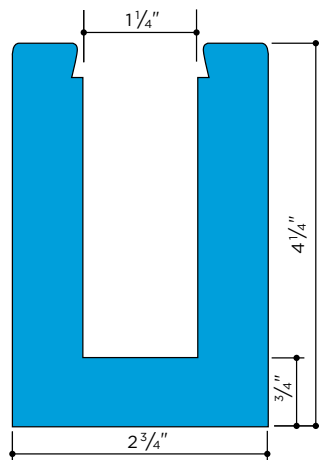


Alloy 6063-T52

● 1143\* Aluminum 8.64 lb/ft

\* For use with 3/4" glass

**SETTING BLOCK**

Polyvinyl Chloride

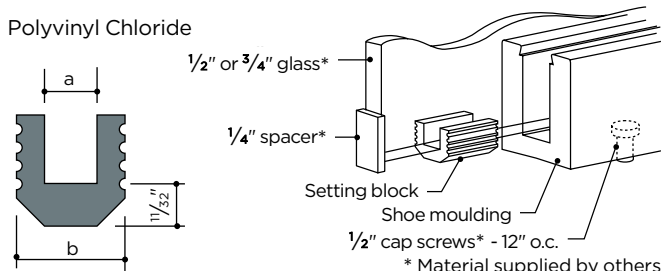


	a	b	Coil Length
● 8711	1/2"	1"	25'
● 8710	3/4"	1 1/4"	40'

**SHOE MOUNTING DETAILS**


Proper mounting of the shoe moulding is crucial to the strength of JB® Glass Railing. While there are alternate methods of attachment, the assembly details on this page depict the four ways in which the shoe mouldings have been tested.

**Assembly Details**


**Flush Mounted**

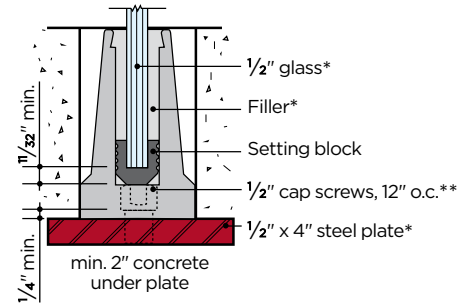


**Surface Mounted**

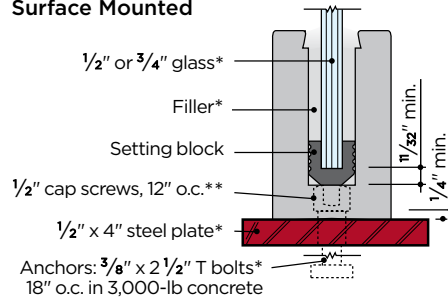

**Fascia Mounted**

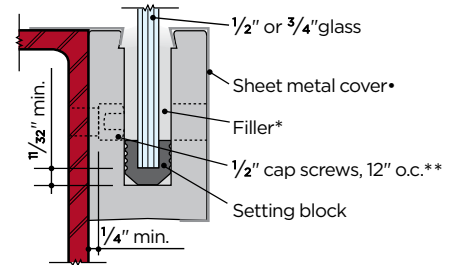

**Shelf Angle Mounted**

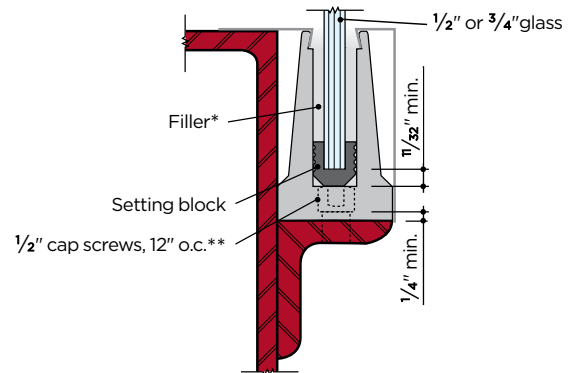

\* Material supplied by others

\*\*Mounting Bolt: 1/2" stainless steel socket head cap screw. Used on 12" centers

Aluminum must not be placed in direct contact with concrete or dissimilar metals. Use appropriate paint or primer. (See Guide Specifications Section 057300 at juliusblum.com)



Center of Theological Inquiry, Princeton, NJ, Capitol Steel Products, Inc., Trenton, NJ (Fabricator), Michael Graves Architect, Princeton, NJ (Architect), © Jeffrey Totaro, 2024 (Photo Credit).

**JULIUS BLUM & CO. INC.**  
 P.O. BOX 986, CARLESTADT, NJ 07072

December 4, 2019

**ALUMINUM SHOE MOULDINGS FOR JULIUS BLUM GLASS RAILING TEST REPORT REVIEW**

**Project Summary**

The test program was conducted by Wiss, Janney, Elstner and Associates, Inc. in 1983 for aluminum shoe mouldings 1141 and 1142 for the Julius Blum Glass Railing System. These tests applied a load in 50-lb increments up to maximum concentrated loads of either 400 to 800 pounds depending on the test, with deflection readings taken at each load level. The loads were applied at approximately 42 inches from the reference floor surface. The test sections used were 4 feet in length. Per the 1983 test report, the worst-case deflection in the aluminum shoe moulding under the IBC minimum required 2000 load was 0.039 inches, measured at one half inch from the moulding top. Per the 1983 test report, "no significant dimensional change in the mouldings was observed which would indicate yielding of the material under the test load." Therefore, the Julius Blum 1141 and 1142 aluminium shoe mouldings comply with all current code requirements for railing design. Julius Blum aluminium shoe mouldings are manufactured in the USA. A review of the 1983 Julius Blum Catalog and discussions with Julius Blum representatives have confirmed that the aluminium shoe mouldings tested in 1983 have not been altered in material, dimension or fabrication process. Per the letter dated July 13, 1999 by Estes and Associates, based on its dimensional properties compared with the 1142 moulding, the 1143 aluminium shoe moulding also would be expected to pass the testing. Alfred Benesch and Company has reviewed the test results dated January 13, 1983 (see attached) and as of December 4, 2019 have determined it to be in accordance with the following standards in effect at this time: 2018 IBC, ASTM E894 - 18, and ASTM E935 - 11.

**Project Scope**

The 1983 testing program evaluated the capability of the aluminum shoe moulding to meet the latest code mandated loadings set forth at the time by OSHA handrailing criteria. The Julius Blum aluminum shoe mouldings provide anchorage at the base of glass panels as a part of the overall glass railing system. The test was conducted by attaching the 4 foot segment of moulding onto a test bed. For the flush and surface mounted tests, the test bed was a section of concrete slab that was supported by timbers at each end and secured to the laboratory floor via anchor bolts. For the fascia mounted tests, the test bed consisted of steel angles which were bolted to the laboratory floor. To allow for testing up to 800 pounds, glass panels were replaced with half inch thick 4"x4" steel panels for this test. Therefore, the deflections in the test may not be used to demonstrate expected deflections of the overall glass handrail system, only the aluminum shoe moulding. Loads were measured using a spring scale for tests 1-4 and a calibrated load cell for all the other tests. Deflections were measured using dial gauges with accuracy to the thousandths of an inch. The test was performed in accordance with ASTM E935, Performance of Permanent Metal Railing Systems and Rails for Buildings. The 1983 testing procedure determined that a minimum of three specimens would be tested for each of the five mounting configurations in accordance with the recommendations of the ASTM specifications.

Section 1607.8.1 of the 2018 IBC requires that handrails and guards be designed to support a concentrated load of 200 pounds, or a 50 pound per foot uniform load. Since the aluminum shoe moulding was tested for a length of 4 feet, the concentrated loading condition governed the testing.

**benesch**

Julius Blum & Co. Inc. | Aluminum Shoe Mouldings for Julius Blum Glass Railing Test Report Review

**STRUCTURAL TEST RESULTS**

JB® Glass Rail shoe mouldings were subjected to structural testing by the independent testing lab of Wiss, Janney, Elstner Associates, Inc. of Northbrook, Illinois.

The complete JB® Glass Rail Shoe Moulding test report is available upon request.


Reprinted to the right is the summary, reviewed in 2019 by engineering firm Benesch, of the structural test of the JB® Glass Rail Shoe Moulding.

Complete test report available to download [juliusblum.com](http://juliusblum.com).

● ALUMINUM ● STAINLESS ● PLASTIC


**HANDRAIL MOULDINGS**

20' lengths. For use with 1/2" glass, except as noted

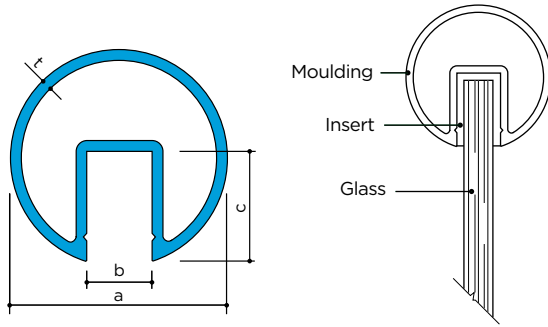


		a	b	c	t	lb/ft
● 1130	Aluminum	1.900"	3/4"	1 1/4"	.109"	1.01
● 1132	Aluminum	2 1/2"	3/4"	1 1/4"	.125"	1.52
● 1137	Aluminum	3"	3/4"	1 1/4"	.125"	1.72
● 1154†	Aluminum	3"	1"	1 1/4"	.125"	1.73
● 1135	Aluminum	3 1/2"	3/4"	1 1/4"	.125"	1.95
● 1155†	Aluminum	3 1/2"	1"	1 1/4"	.125"	1.97


† For use with 3/4" glass

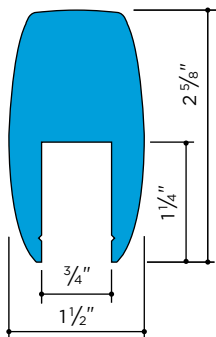


● 1133 Aluminum 3.02 lb/ft



● 1134 Aluminum 2.40 lb/ft

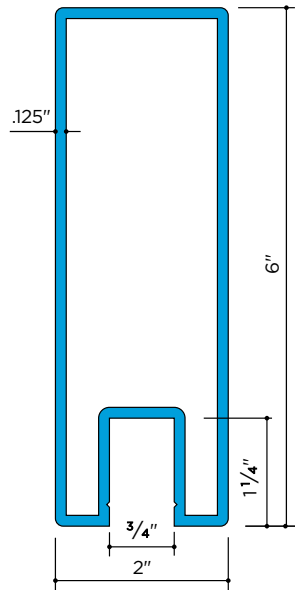


● 1136 Aluminum 2.70 lb/ft

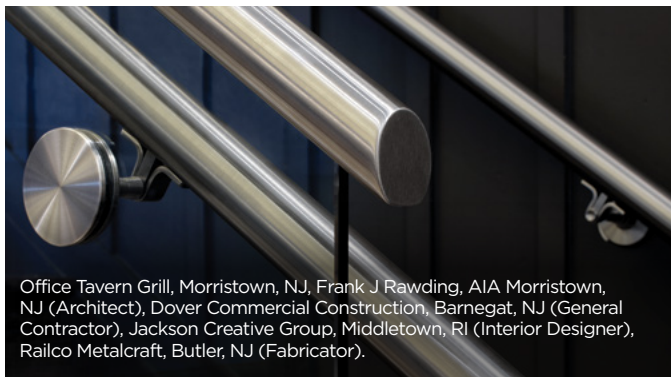

Office Tavern Grill, Morristown, NJ, Frank J Rawding, AIA Morristown, NJ (Architect), Dover Commercial Construction, Barnegat, NJ (General Contractor), Jackson Creative Group, Middletown, RI (Interior Designer), Railco Metalcraft, Butler, NJ (Fabricator).

20' lengths





		a	lb/ft	Finish
● 1430*	Stainless	1.900"	1.70	No.2B
● 1432*	Stainless	2 1/2"	1.96	No.2B
● 1452	Stainless	2 1/2"	1.96	No.4
● 1433*	Stainless	3"	2.46	No.2B
● 1453	Stainless	3"	2.46	No.4
● 1472*	Stainless	4"	3.17	No.2B
● 1473	Stainless	4"	3.17	No.4

\* Suitable for polishing

It is important to be aware that connections of roll-formed stainless steel shapes require special attention to ensure proper alignment.

**PROTECTIVE INSERTS**



Polyvinyl Chloride, 7' lengths. Fasten with windshield sealer type of clear adhesive

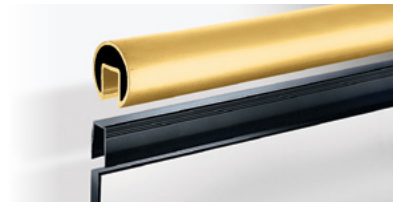

		Glass Size	a	b	c
● 8709	Polyvinyl Chloride	1/2"	3/4"	1/2"	1"
● 8713	Polyvinyl Chloride	1/2"	3/4"	1/2"	1 1/8"
● 8714	Polyvinyl Chloride	3/4"	1"	3/4"	1 1/4"

**EDGE PROTECTOR**

Clear Copolymer, 7' lengths




Fasten with windshield sealer type of clear adhesive or clear double-stick foam tape.

		Glass Size	a	b	c
● 8715		1/2"	.510"	1/2"	5/8"
● 8716		3/4"	.760"	3/4"	5/8"

● BRONZE ● NICKEL-SILVER ● PLASTIC


**HANDRAIL MOULDINGS**

20' lengths, except as noted

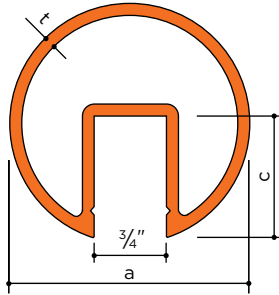


		a	c	t	lb/ft
● 1230	Bronze	1.900"	3/4"	.100"	3.43
● 1233*	Bronze	3"	1 1/4"	.125"	6.05
● 1235**	Bronze	3 1/2"	1 1/4"	.187"	8.70

\* 16' lengths \*\* 12' lengths

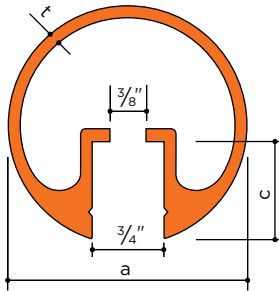


		a	c	t	lb/ft
● 1232	Bronze	2 1/2"	1"	.125"	5.19

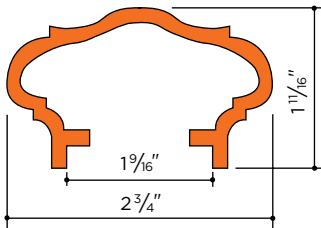

● 4538*	Bronze				3.15 lb/ft
---------	--------	--	--	--	------------


\* 16' lengths Use with 8738 insert for 1/2" glass

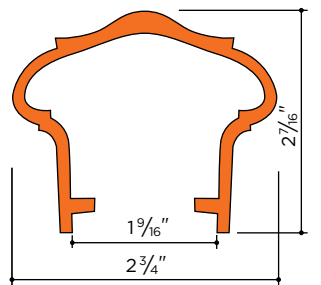


● 4533*	Bronze				3.66 lb/ft
---------	--------	--	--	--	------------

\* 16' lengths; Use with 8738 insert for 1/2" glass


16' lengths, except as noted

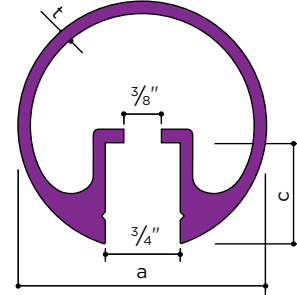

		a	c	t	lb/ft
● 1330	Nickel-Silver	1.900"	3/4"	.125"	3.43
● 1332	Nickel-Silver	2 1/2"	1"	.125"	5.19

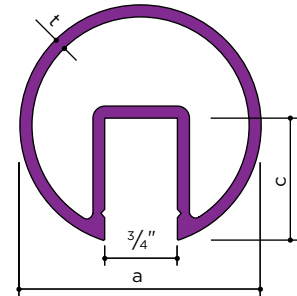

		a	c	t	lb/ft
● 1333	Nickel-Silver	3"	1 1/4"	.125"	5.28






● 5538*	Nickel-Silver				2.96 lb/ft
---------	---------------	--	--	--	------------

\* 20' lengths; Use with 8738 insert for 1/2" glass

**PROTECTIVE INSERTS**

Polyvinyl Chloride  
7' lengths.  
Fasten with windshield sealer  
type of clear adhesive



5538 or 4538 with 8738 insert  
used with 6121 moulding  
(see pg. 105) on 1/2" glass


	a	b	c
● 8738	1"	1/2"	1 1/4"

● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STAINLESS



Private Residence, Connecticut, Architectural Atlantic Stair NY, Inc. Brooklyn, NY (Fabricator), Tanner White Architects, Westport, CT (Architect), Asprea Studio, New York, NY/ Miami, FL (Designer) Quest Builders Group, NY, NY, Milford, CT, Miami, FL, Oakland, CA (Builder).

END CAPS

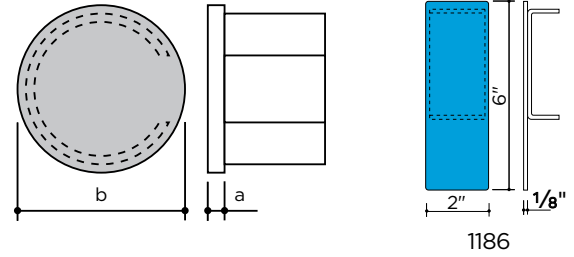

		a	b
● 7280	Aluminum	1/8"	1.900"
● 1180	Aluminum	1/8"	2 1/2"
● 1182	Aluminum	1/8"	3"
● 1181	Aluminum	1/8"	3 1/2"
● 1186 •	Aluminum	1/4"	2"
● 1282	Bronze	1/4"	1.900"
● 1280	Bronze	1/4"	2 1/2"
● 1283	Bronze	1/4"	3"
● 1281	Bronze	1/4"	3 1/2"
● 4538N	Bronze	2"	•
● 1330N	Nickel-Silver	1/4"	1.900"
● 1332N	Nickel-Silver	1/4"	2 1/2"
● 1333N	Nickel-Silver	1/4"	3"
● 5538N	Nickel-Silver	2"	•
● 9380	Stainless	1/8"	1.900"
● 1480	Stainless	1/8"	2 1/2"
● 1482	Stainless	1/8"	3"
● 1473N	Stainless	1/8"	4"

1186

• Matches profile


FITTINGS AVAILABILITY FOR JB® GLASS RAILING

Handrail Moulding	90° Radius Elbow	90° Miter Elbow	Connector Sleeve	End Cap	Matching Tubing
● 1130	● 7210		● 1160	● 7280	● Yes
● 1132	● 1110	● 1111	● 1163	● 1180	● Yes
● 1135	● 1122	● 1112	● 1164	● 1181	● Yes
● 1136				● 1186	● Yes
● 1137	● 1120	● 1115	● 1170	● 1182	● Yes
● 1154	● 1120	● 1113	● 1170	● 1182	● Yes
● 1155	● 1122	● 1114	● 1164	● 1181	● Yes
● 1230	● 1222	● 1214†	● 1160	● 1282†	● Yes
● 1232	● 1210	● 1211†	● 1163	● 1280†	● Yes
● 1233	● 1220	● 1213†	● 1170	● 1283†	● Yes
● 1235		● 1212†	● 1264	● 1281†	● Yes
● 1330	● 1330C		● 1363	● 1330N†	● Yes
● 1332	● 1332C		● 1163	● 1332N†	● Yes
● 1333	● 1333C		● 1170	● 1333N†	● Yes
● 1430	● 9310**	● 1414**	● 9363	● 9380**	● Yes
● 1432/52	● 1410*	● 1411**	● 1463	● 1480**	● Yes
● 1433/53	● 1420*	● 1413**	● 1464	● 1482**	● Yes
● 1472/73		● 1473M**	● 1474	● 1473N**	● Yes
● 4538				● 4538N†	
● 5538				● 5538N†	

\* No. 2B Finish \*\* No. 4 Finish

† Polished and lacquered, 180 grit • Matches profile


90° RADIUS ELBOW

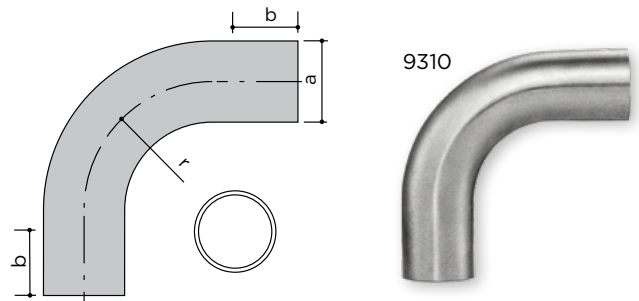

		a	r	Wall	b
● 7210	Aluminum	1.900"	3"	.109"	2"
● 1110	Aluminum	2 1/2"	5"	.125"	2 1/2"
● 1120	Aluminum	3"	5"	.125"	2 1/2"
● 1122	Aluminum	3 1/2"	5"	.125"	2 1/2"
● 1222	Bronze	1.900"	3"	.100"	2 1/2"
● 1210	Bronze	2 1/2"	5"	.125"	2 1/2"
● 1220	Bronze	3"	6"	.125"	2 1/2"
● 1330C	Nickel-Silver	1.900"	3"	.109"	2 1/2"
● 1332C	Nickel-Silver	2 1/2"	5"	.125"	2 1/2"
● 1333C	Nickel-Silver	3"	5"	.125"	2 1/2"
● 9310	Stainless	1.900"	3"	.062"	2"
● 1410	Stainless	2 1/2"	5"	.062"	2 1/2"
● 1420	Stainless	3"	5"	.062"	2 1/2"

● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STAINLESS


90° MITER ELBOW

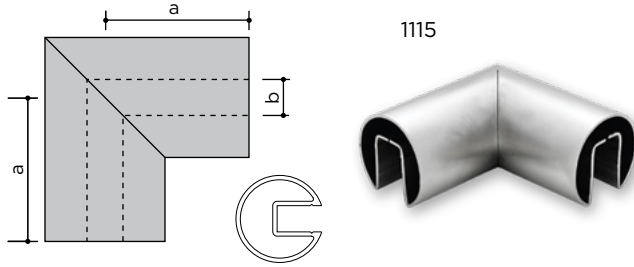

		OD	Wall	a	b
● 1111	Aluminum	2 1/2"	.125"	3"	3/4"
● 1115	Aluminum	3"	.125"	4 1/2"	3/4"
● 1113	Aluminum	3"	.125"	4 1/2"	1"
● 1112	Aluminum	3 1/2"	.125"	4 1/2"	3/4"
● 1114	Aluminum	3 1/2"	.125"	4 1/2"	1"
● 1214	Bronze	1.900"	.100"	3"	3/4"
● 1211	Bronze	2 1/2"	.125"	3"	3/4"
● 1213	Bronze	3"	.125"	4 1/2"	3/4"
● 1212	Bronze	3 1/2"	.187"	4 1/2"	3/4"
● 1414	Stainless	1.900"	.062"	3"	3/4"
● 1411	Stainless	2 1/2"	.062"	3"	3/4"
● 1413	Stainless	3"	.062"	4 1/2"	3/4"
● 1473M	Stainless	4"	.062"	4 1/2"	3/4"

OD ROUND TUBING

Mill finish only, except as noted .  
20' lengths, except as noted

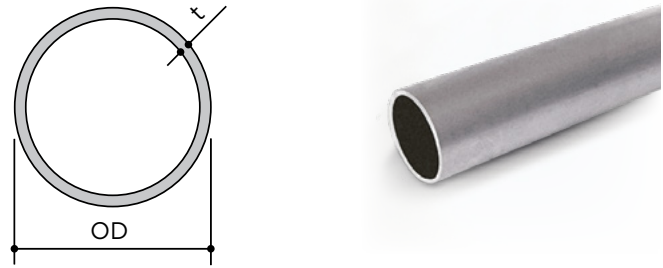


● Aluminum	6063-T52
● Bronze	C38500
● Nickel-Silver	C79800
● Stainless	Type 304

	OD	t	lb/ft	Area	l	s
● Aluminum	1.900"	.109"	.721	.614	.247	.260
● Aluminum	2 1/2"	.125"	1.119	.933	.659	.527
● Aluminum	3"	.125"	1.328	1.129	1.169	.779
● Aluminum	3 1/2"	.125"	1.559	1.325	1.890	1.080
● Bronze	1.900"	.100"	2.070	.565	.230	.242
● Bronze	2 1/2"	.125"	3.441	.933	.659	.527
● Bronze	3"	.125"	4.500	1.129	1.169	.779
● Bronze††	3 1/2"	.125"	4.850	1.325	1.890	1.080
● Nickel-Silver	1.900"	.109"	2.250	.614	.247	.260
● Nickel-Silver†	2 1/2"	.125"	3.400	.933	.659	.527
● Nickel-Silver†	3"	.125"	4.500	1.129	1.169	.779
● Stainless**	1.900"	.062"	1.274	.375	.158	.166
● Stainless	2 1/2"	.062"	1.691	.479	.356	.285
● Stainless	3"	.062"	1.930	.577	.622	.415
● Stainless	4"	.062"	2.550	.804	1.556	.778

\*\* No. 4 Finish † 16' lengths †† 12' lengths

CONNECTOR SLEEVE


5" lengths

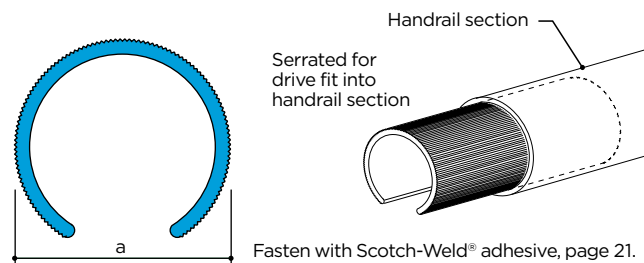

		a
● 7063	Aluminum for 6489 Bronze and 5289 Nickel-Silver	1.500"
● 1363	Aluminum for 1330 handrail	1.650"
● 1160	Aluminum for 1130 and 1230 handrails	1.682"
● 9363	Aluminum for 1430 handrail	1.770"
● 1163	Aluminum for 1132, 1232, and 1332 handrails	2.250"
● 1463	Aluminum for 1432 and 1452 handrails	2.375"
● 1170	Aluminum for 1137, 1154, 1233 and 1333 handrails	2.750"
● 1464	Aluminum for 1433 and 1453 handrails	2.875"
● 1264	Aluminum for 1235 handrail	3.125"
● 1164	Aluminum for 1135 and 1155 handrails	3.250"
● 1474	Aluminum for 1472 and 1473 handrails	3.875"

COVER FLANGE

Satin Finish

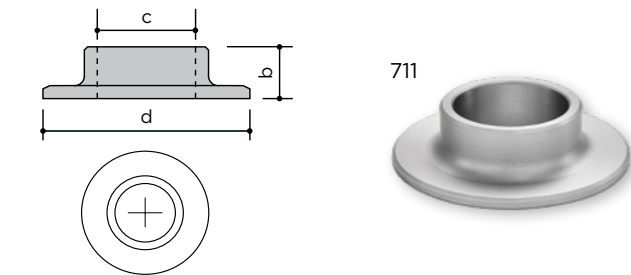

		OD	b	c	d
● 711	Aluminum	1.900"	1"	1.94"	4"
● 1125	Aluminum	2 1/2"	1"	2.54"	4 3/4"
● 1123	Aluminum	3"	1"	3.04"	5"
● 811	Bronze	1.900"	1"	1.94"	4"
● 1225	Bronze	2 1/2"	1"	2.54"	4 3/4"
● 1223	Bronze	3"	1"	3.04"	5"
● 411	Nickel-Silver	1.900"	1"	1.94"	4"
● 1325	Nickel-Silver	2 1/2"	1"	2.54"	4 3/4"
● 1323	Nickel-Silver	3"	1"	3.04"	5"
● 211	Stainless	1.900"	7/8"	1.94"	4 1/2"
● 1425	Stainless	2 1/2"	1 1/16"	2.54"	4 7/8"
● 1423	Stainless	3"	1 7/16"	3.04"	6 1/8"


● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STAINLESS

**WALL-MOUNTED HANDRAIL**

Matching tubing sections are available for wall mount using Carlstadt® rail wall brackets. JB® Glass Rail sections may also be wall mounted using the appropriate hardware. An anchor plug slips into the recess of the handrail and is locked in place by the bracket mounting screws. The handrail bracket flange is concealed inside the recess of the handrail. The underside of the handrail may be closed with an aluminum closure or stainless flat.

**CLOSURES**

5' lengths, Flat




	a	lb/ft
● 1138 Aluminum	3/4"	.10
● 1139 Aluminum	1"	.13

For use with aluminum, nickel-silver and bronze handrails

**TRUE BAR**

12' to 14' lengths, sharp corners




	a	b	lb/ft
● Stainless	3/16"	3/4"	.48

For use with stainless steel handrails


**ANCHOR PLUG**

Fits recess in handrail



	a
● 1162 Aluminum	3/4"
● 1161 Aluminum	1"

Bottom of anchor plug has continuous thread for #10-32 screw

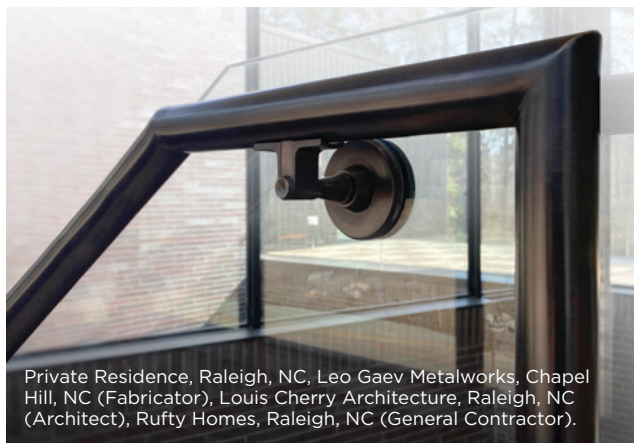


Private Residence, Raleigh, NC, Leo Gaev Metalworks, Chapel Hill, NC (Fabricator), Louis Cherry Architecture, Raleigh, NC (Architect), Ruffy Homes, Raleigh, NC (General Contractor).

**GLASS-MOUNTED HANDRAIL**

Handrail may be mounted to the face of the tempered glass balustrade using a combination of wall brackets and our JB® Glass-Mounted Handrail Adapter Kit. The kit contains a disc with a 3/8" stud weld, a bushing, and two gaskets.


TO ASSEMBLE:

1. Prior to tempering, for 1/2" glass drill a 5/8" clear hole; for 3/4" glass drill a 7/8" clear hole.  
**(Do not attempt to drill a hole in tempered glass—it will most likely break).**
2. Insert the bushing in the hole.
3. Insert the stud welded disc with gasket through the bushing; place the gasket on the other side.
4. Thread on bracket and tighten.

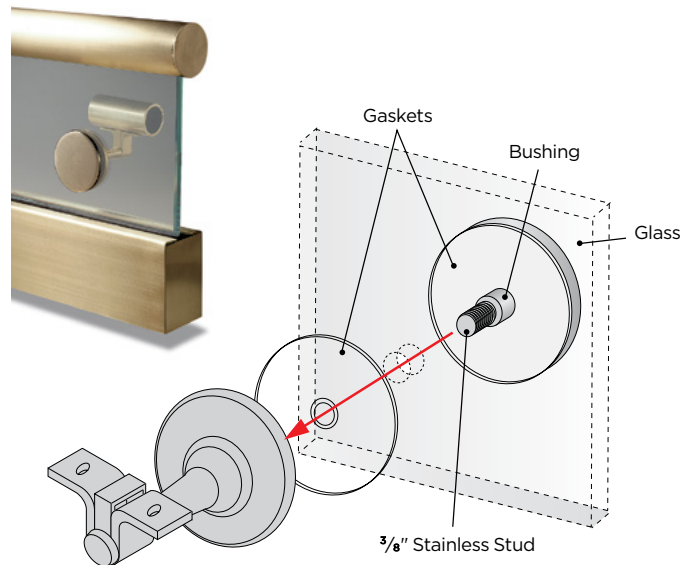

**GLASS-MOUNTED HANDRAIL ADAPTER KIT**

For 1/2" and 3/4" glass  
Satin Finish

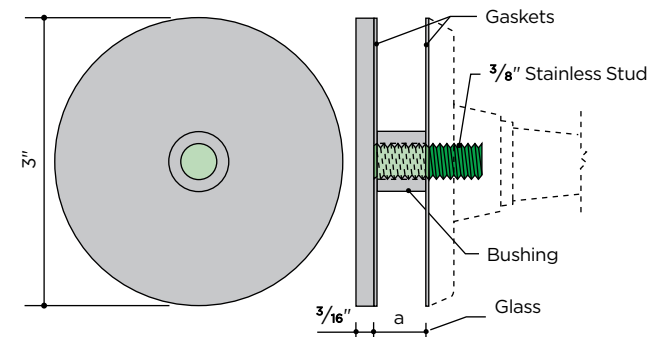

		Glass Size	a	Bushing Diameter
● 824	Bronze	1/2"	1/2"	5/8"
● 840	Bronze	3/4"	3/4"	7/8"
● 224*	Stainless	1/2"	1/2"	5/8"
● 240*	Stainless	3/4"	3/4"	7/8"
● 1624	Nickel-Silver	1/2"	1/2"	5/8"
● 1640	Nickel-Silver	3/4"	3/4"	7/8"


\* For use with aluminum and stainless brackets

● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STAINLESS



CARLSTADT® SELF-ALIGNING WALL BRACKETS


Satin Finish

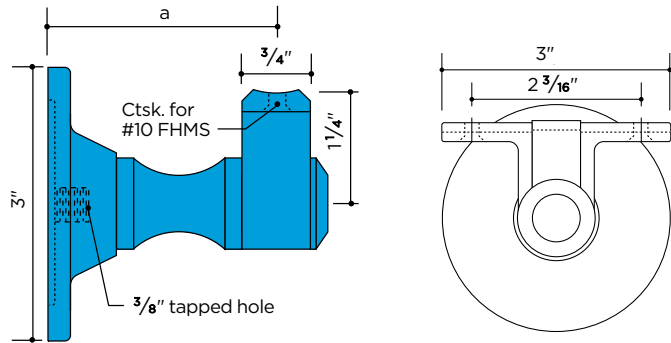


	a
● 307 Aluminum	2 1/2"
● 308 Aluminum	3"

WALL BRACKETS

Cast, Satin Finish, for use with pipe railing

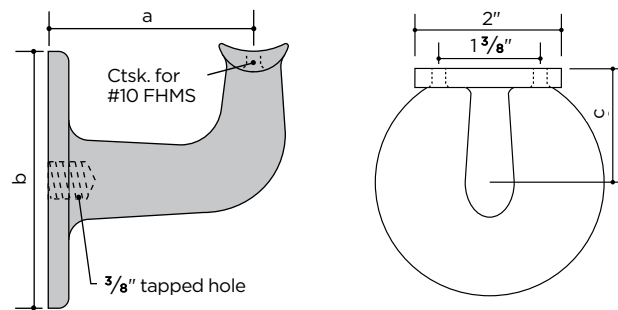


	a	b	c
● 376 Aluminum	2 1/2"	3 1/8"	1 9/16"
● 389 Aluminum	3 1/8"	3 3/4"	1 7/8"
● 375 Bronze	2 1/2"	3 1/8"	1 9/16"
● 319 Bronze	3 1/8"	3 3/4"	1 7/8"
● 176 Nickel-Silver	2 1/2"	3 1/8"	1 9/16"
● 275 Stainless	2 1/2"	3 1/8"	1 9/16"

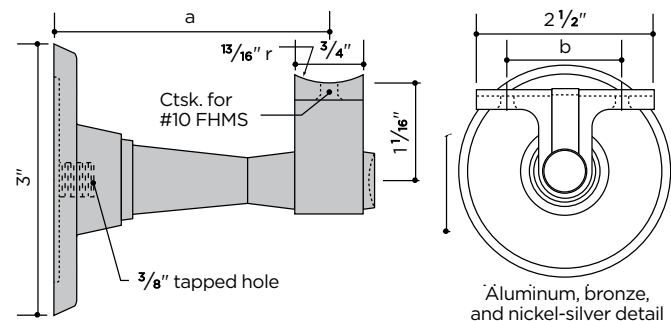


	a	b
● 321 Aluminum	2 1/4"	1 5/8"
● 403 Aluminum	3"	1 5/8"
● 405 Aluminum	3 1/2"	1 5/8"
● 842 Bronze	2 1/4"	1 5/8"
● 801 Bronze	2 1/2"	1 5/8"
● 803 Bronze	3"	1 5/8"
● 1342 Nickel-Silver	2 1/4"	1 5/8"
● 1303 Nickel-Silver	3"	1 5/8"
● 242 Stainless	2 1/4"	1 13/16"
● 221 Stainless	2 1/2"	1 13/16"
● 223 Stainless	3"	1 13/16"

WALL BRACKETS

Cast, Satin Finish

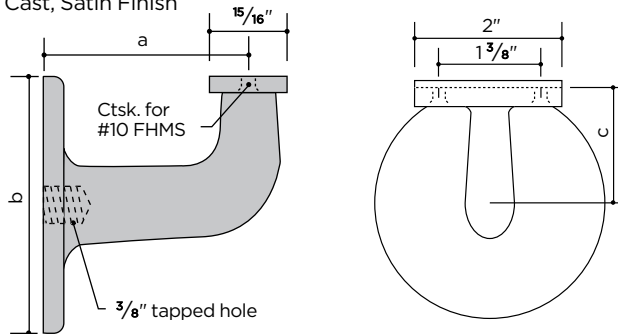


	a	b	c
● 371 Aluminum	2 1/2"	3 1/8"	1 9/16"
● 302 Aluminum	3 1/8"	3 3/4"	1 7/8"
● 370 Bronze	2 1/2"	3 1/8"	1 9/16"
● 304 Bronze	3 1/8"	3 3/4"	1 7/8"
● 170 Nickel-Silver	2 1/2"	3 1/8"	1 9/16"
● 270 Stainless	2 1/2"	3 1/8"	1 9/16"

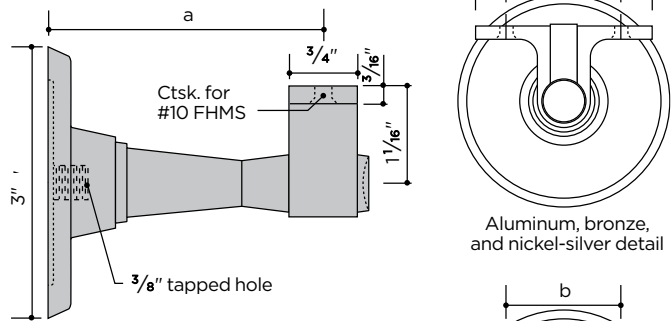

	a	b
● 443 Aluminum	3"	1 5/8"
● 444 Aluminum	3 1/2"	1 5/8"
● 844 Bronze	2 1/2"	1 5/8"
● 843 Bronze	3"	1 5/8"
● 1343 Nickel-Silver	3"	1 5/8"
● 271 Stainless	2 1/4"	1 13/16"
● 243 Stainless	3"	1 13/16"

# PIPE RAILINGS

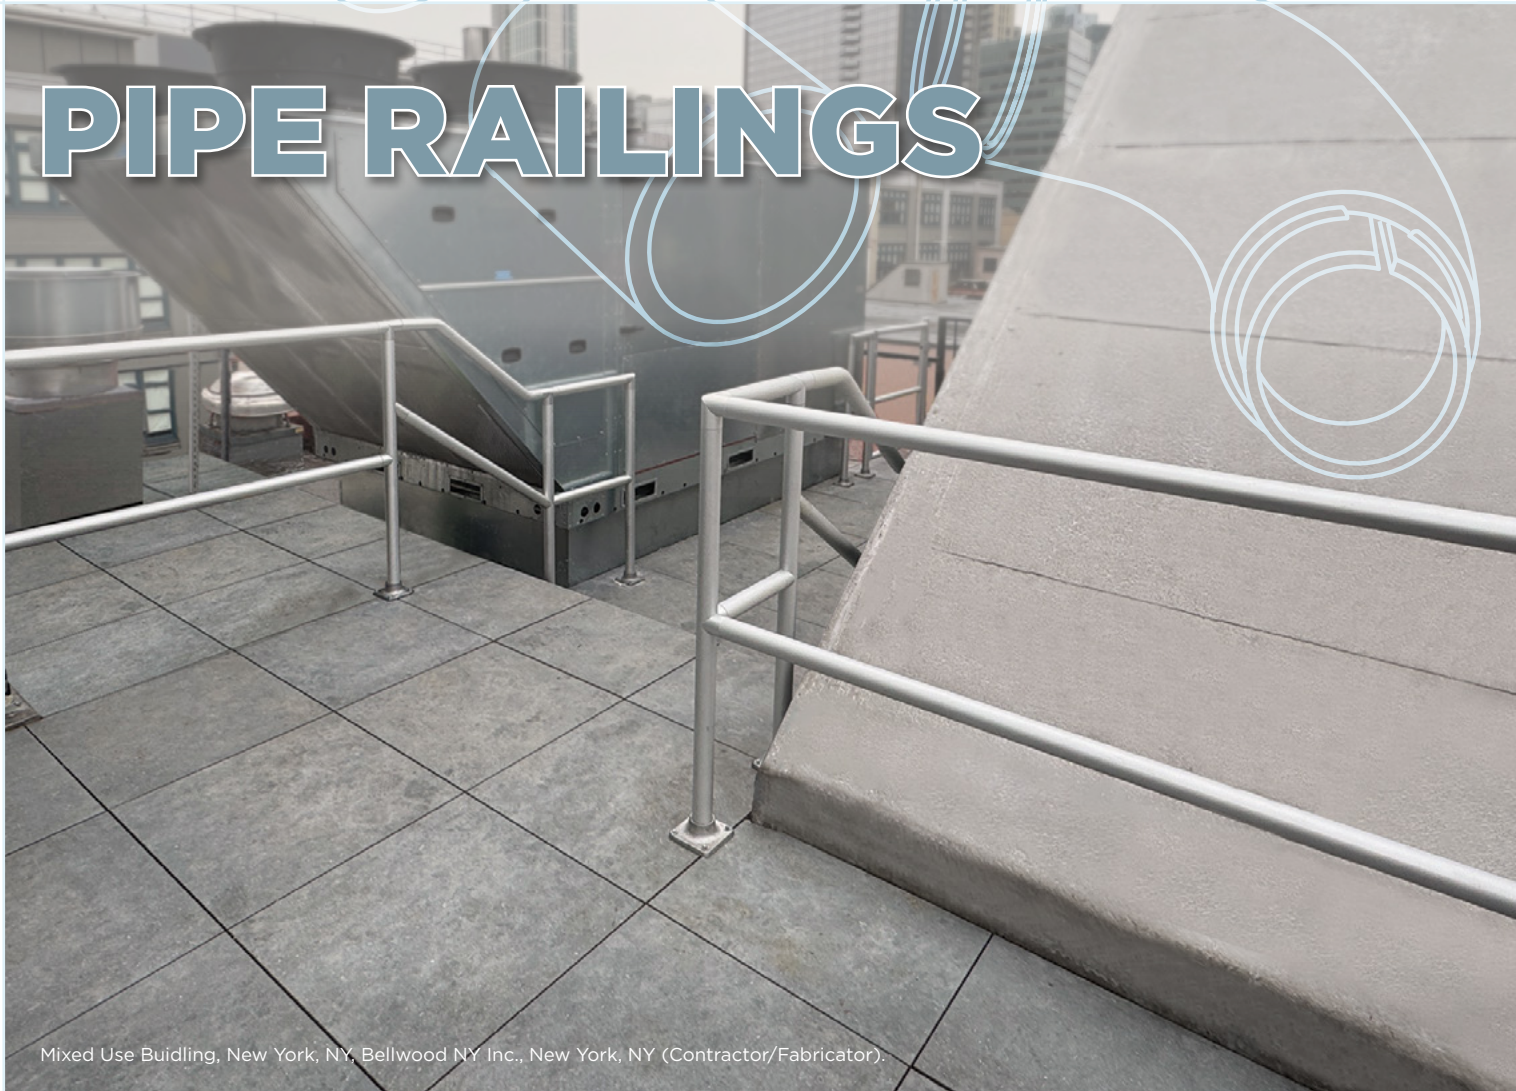

Mixed Use Building, New York, NY, Bellwood NY Inc., New York, NY (Contractor/Fabricator).

**Connectorail®** is an easy-to-assemble pipe railing system that is fabricated quickly without welding. Components slip together and are joined by concealed mechanical fasteners at intersections and by epoxy structural adhesive at splice joints.

The Connectorail® system has been engineered and tested to ensure structural strength and integrity when properly installed. Test results are available upon request. Connectorail® meets established safety standards when installed in accordance with our data and instructions.

- **Aluminum** Connectorail® components are stocked in 1¼" and 1½" pipe sizes—schedules 10 and 40—in alloy 6063 with either clear anodized—AA-M10-C22-A31 (204R1)—or smooth mill finish. Connectorail® pipe is specially extruded to close dimensional tolerances with a clean smooth surface finish. Aluminum pipe is stocked in mill-wrapped, paper-interleaved bundles of approximately 100 pounds. Aluminum pipe is suitable for powder coating and anodizing, including most of the hard coat anodic processes. Black anodizing may result in inconsistent matches. Consult your anodizer before specifying.
- **Bronze** Connectorail® is supplied in 1¼" and 1½" pipe sizes in drawn pipe alloy C23000 (Red Brass) with a smooth mill finish. Bronze fittings are satin finished—(180 grit)—and lacquered.

- **Nickel-Silver** Connectorail® is available in extruded 1½" schedule 10 pipe in alloy C79800 with a smooth mill finish. Radius elbows are supplied similarly. All other components are satin finished—(180 grit)—and lacquered.


- **Stainless Steel** (type 304) components are furnished with a No. 4 satin finish in 1½" schedule 5 pipe size in an Ornamental Grade with a guaranteed expected yield of 55,000 [psi]. The pipe is sleeved for surface protection.

Stainless Connectorail® can also be fabricated by welding. The use of Connectorail® stainless steel fittings eliminates notching and grinding and permits rapid welding with a minimum addition of weld metal.

**Fittings for welded assembly** are available in cast aluminum, bronze, iron, malleable iron, formed steel, and stainless steel. Flanges and elbows are available for aluminum, bronze, nickel-silver, and stainless OD tubing. All items are carried in stock in substantial quantities and are available for immediate shipment. The *Americans with Disabilities Act* adopted by Congress in 1992 specified circular handrails to be 1¼" minimum and 1½" maximum. However, the *Guidance on the 2010 ADA Standards for Accessible Design - September 2010*, published by the US Department of Justice, has now properly clarified the intent of the dimensional requirements to be an outside diameter of 1¼" to 2".

FITTING KEY:		D Heavy-Duty Floor Flange	G Angle Tee	L Gate Latch & Stop	Q Toe Board	U Return Elbow
A 90° Radius Elbow	E Rail Elbow	H Post Elbow	J Gate Hinge	M 90° Corner Tee	R Ramp Rail Tee	W Wall Bracket
B 90° Tee	F Ramp Rail Elbow	K Post Bracket	N 90° Miter Elbow	P 90° 3-Way Elbow	S Cover Flange	X Socket
C Connector Sleeve					T Fascia Flange	Y Panel Clip

**Verify all dimensions before cutting.** Aluminum components and pipe are carried in stock with a mill finish or a clear anodized finish—AA-M10-C22-A31 (204R1). When specifying anodized fittings, add the suffix -A to catalog number listed (e.g. **7140-A**).

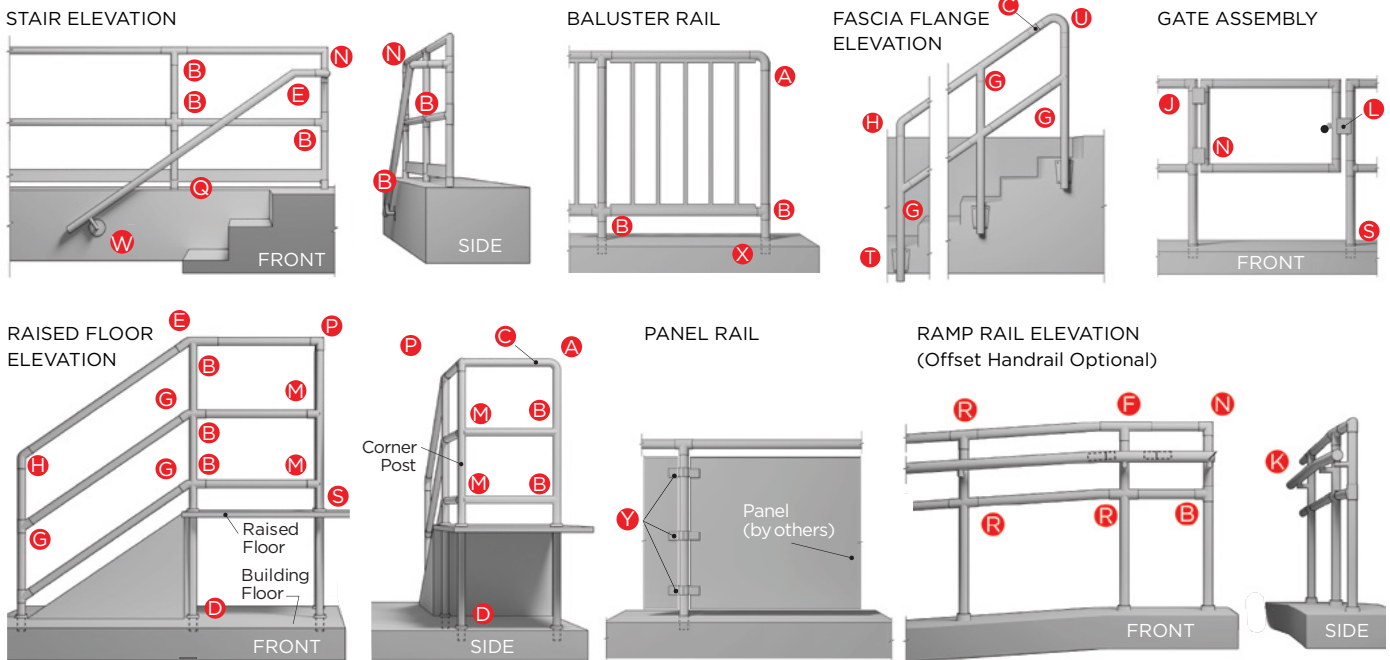

PIPE RAILINGS



## FULL RANGE OF FITTINGS

A complete selection of fittings is offered for the Connectorail® system. A suitable fitting is available for practically any stair or ramp railing condition. Adjustable handrail brackets and ramp rail tees are recommended for unusual ramp or stair angles.



## OPTIONS FOR MOUNTING

Connectorail® posts may be embedded in floor slab with a cover flange, surface mounted with a heavy-duty floor flange, or side mounted on fascia or stringer by means of a fascia flange. A reinforcing insert is used at the base of the post for added strength and stiffness. A socket for removable railings—with cover—is also available.



## MECHANICAL CONNECTIONS

Non-welded connections eliminate welding discoloration and expensive grinding. Structural adhesive, stainless steel machine screws with lock washers, and threaded tubular rivets provide positive connections at joints. Mechanical connections avoid the reduced allowable design stress effect of welding heat on the structural properties of aluminum handrail pipe.




## CONTINUOUS POSTS AND RAILS

Posts and top rails run in continuous lengths, thus providing a system that is inherently stronger than one with cast tee and cross connections. Connectorail® has a continuous, smooth top surface as required by established safety standards and code requirements. The structural integrity of the railing depends on the proper selection of components, location of posts, and proper assembly and installation.

● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STAINLESS

CONNECTORAIL® PIPE

20' Lengths




- Aluminum: Alloy 6063-T52 and Alloy 6063-T832 clear anodized or mill finish
- Bronze: C23000, smooth mill finish
- Nickel-Silver: C79800, smooth mill finish
- Stainless: Type 304, ornamental grade, No. 4 finish

	Pipe	Sched.	t	c	lb/ft
● Aluminum	1 1/4"	10	.109"	1.660"	.625
● Aluminum	1 1/4"	40	.140"	1.660"	.785
● Aluminum	1 1/2"	10	.109"	1.900"	.721
● Aluminum	1 1/2"	40	.145"	1.900"	.940
● Bronze	1 1/4"	40	.146"	1.660"	2.630
● Bronze	1 1/2"	40	.150"	1.900"	3.130
● Nickel-Silver	1 1/2"	10	.109"	1.900"	2.250
● Stainless	1 1/2"	5	.062"	1.900"	1.274

HIGH STRENGTH CONNECTORAIL® POSTS


Aluminum only



Alloy 6063-T832  
Drawn pipe precut to post lengths.  
Clear anodized or mill finish

	Pipe	Sched.	Length	c	t
● 7103	Aluminum	1 1/4"	10 38"	1.660"	.109"
● 7104	Aluminum	1 1/4"	10 50"	1.660"	.109"
● 7403	Aluminum	1 1/4"	40 38"	1.660"	.140"
● 7404	Aluminum	1 1/4"	40 50"	1.660"	.140"
● 7203	Aluminum	1 1/2"	10 38"	1.900"	.109"
● 7204	Aluminum	1 1/2"	10 50"	1.900"	.109"
● 7503	Aluminum	1 1/2"	40 38"	1.900"	.145"
● 7504	Aluminum	1 1/2"	40 50"	1.900"	.145"


90° TEE

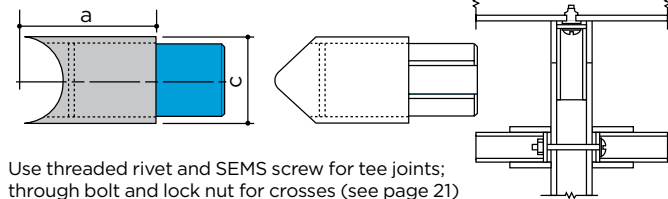

Use threaded rivet and SEMS screw for tee joints;  
through bolt and lock nut for crosses (see page 21)

	Pipe	Sched.	c	a
● 7140	Aluminum	1 1/4"	10 1.660"	2"
● 7440	Aluminum	1 1/4"	40 1.660"	2"
● 7240	Aluminum	1 1/2"	10 1.900"	2"
● 7540	Aluminum	1 1/2"	40 1.900"	2"
● 8640	Bronze	1 1/4"	40 1.660"	3"
● 8840	Bronze	1 1/2"	40 1.900"	3"
● 1340	Nickel-Silver	1 1/2"	10 1.900"	2"
● 9340	Stainless	1 1/2"	5 1.900"	3"


90° CORNER TEE

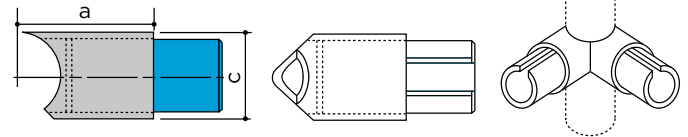

	Pipe	Sched.	c	a
● 7141	Aluminum	1 1/4"	10 1.660"	2"
● 7441	Aluminum	1 1/4"	40 1.660"	2"
● 7241	Aluminum	1 1/2"	10 1.900"	2"
● 7541	Aluminum	1 1/2"	40 1.900"	2"
● 9341	Stainless	1 1/2"	5 1.900"	3"


90° 6" TEE

Aluminum only

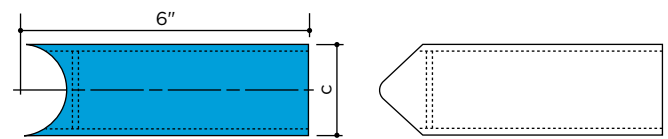

	Pipe	Sched.	c
● 7150	Aluminum	1 1/4"	10 1.660"
● 7450	Aluminum	1 1/4"	40 1.660"
● 7250	Aluminum	1 1/2"	10 1.900"
● 7550	Aluminum	1 1/2"	40 1.900"


90° RADIUS ELBOW

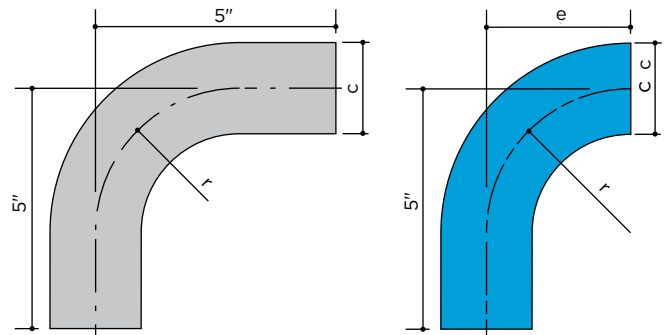

	Pipe	Sched.	c	r	e
● 7110	Aluminum	1 1/4"	10 1.660"	2 1/2"	
● 7120*	Aluminum	1 1/4"	10 1.660"	2 1/2"	2 1/2"
● 7410	Aluminum	1 1/4"	40 1.660"	2 1/2"	
● 7420*	Aluminum	1 1/4"	40 1.660"	2 1/2"	2 1/2"
● 7210	Aluminum	1 1/2"	10 1.900"	3"	
● 7220*	Aluminum	1 1/2"	10 1.900"	3"	3"
● 7510	Aluminum	1 1/2"	40 1.900"	3"	
● 7520*	Aluminum	1 1/2"	40 1.900"	3"	3"
● 8610	Bronze	1 1/4"	40 1.660"	2 1/2"	
● 8810	Bronze	1 1/2"	40 1.900"	3"	
● 1330C	Nickel-Silver	1 1/2"	10 1.900"	3"	
● 9310	Stainless	1 1/2"	5 1.900"	3"	

\* For wall return

CONNECTOR SLEEVES

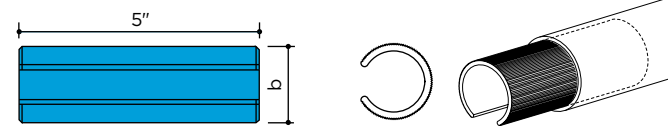


Serrated for drive fit into Connectorail® pipe

	Pipe	Sched.	b
● 7163	Aluminum	1 1/4"	10 1.442"
● 7463	Aluminum	1 1/4"	40 1.380"
● 7263	Aluminum	1 1/2"	10 1.682"
● 7563	Aluminum	1 1/2"	40 1.610"
● 9363	Aluminum	1 1/2"	5 1.770"


● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STAINLESS

90° THREE-WAY ELBOW

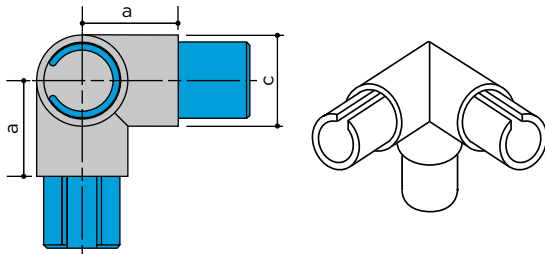


		Pipe	Sched.	c	a
● 7130	Aluminum	1 1/4"	10	1.660"	2"
● 7430	Aluminum	1 1/4"	40	1.660"	2"
● 7230	Aluminum	1 1/2"	10	1.900"	2"
● 7530	Aluminum	1 1/2"	40	1.900"	2"
● 9330	Stainless	1 1/2"	5	1.900"	3"

90° MITER ELBOW

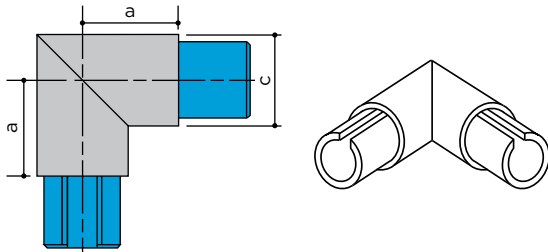

		Pipe	Sched.	c	a
● 7111	Aluminum	1 1/4"	10	1.660"	2"
● 7411	Aluminum	1 1/4"	40	1.660"	2"
● 7211	Aluminum	1 1/2"	10	1.900"	2"
● 7511	Aluminum	1 1/2"	40	1.900"	2"
● 9311	Stainless	1 1/2"	5	1.900"	3"


WALL RETURN

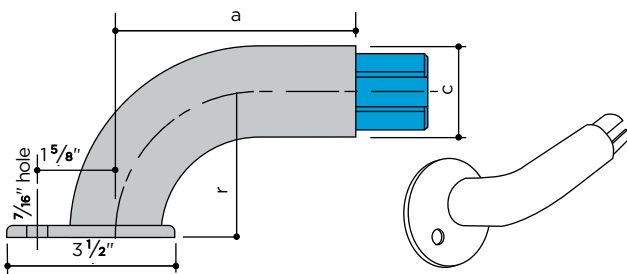

		Pipe	Sched.	c	r	a
● 7173	Aluminum	1 1/4"	10	1.660"	2 1/2"	5"
● 7473	Aluminum	1 1/4"	40	1.660"	2 1/2"	5"
● 7473-3	Aluminum	1 1/4"	40	1.660"	3"	5"
● 7273	Aluminum	1 1/2"	10	1.900"	3"	5"
● 7573	Aluminum	1 1/2"	40	1.900"	3"	5"
● 8673	Bronze	1 1/4"	40	1.660"	2 1/2"	5"
● 8873	Bronze	1 1/2"	40	1.900"	3"	5"
● 1373	Nickel-Silver	1 1/2"	10	1.900"	3"	6"
● 9373	Stainless	1 1/2"	5	1.900"	3"	5"
● 9372	Stainless	1 1/2"	5	1.900"	2 1/2"	5"


RAMP RAIL TEE

Aluminum only

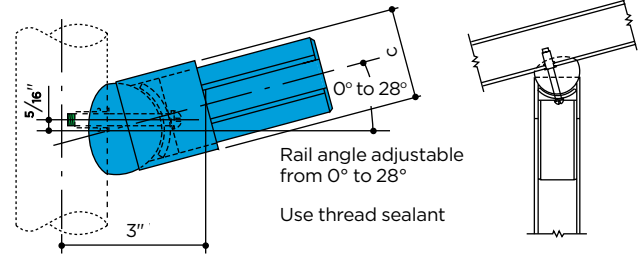

		Pipe	Sched.	c
● 7443	Aluminum	1 1/4"	40	1.660"
● 7243	Aluminum	1 1/2"	10	1.900"
● 7543	Aluminum	1 1/2"	40	1.900"


POST CAPS

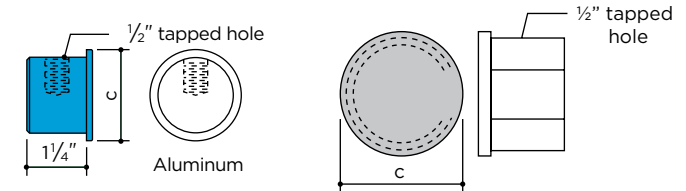

		Pipe	Sched.	c
● 7180	Aluminum	1 1/4"	10	1.660"
● 7480	Aluminum	1 1/4"	40	1.660"
● 7280	Aluminum	1 1/2"	10	1.900"
● 7580	Aluminum	1 1/2"	40	1.900"
● 1330N	Nickel-Silver	1 1/2"	10	1.900"
● 9380	Stainless	1 1/2"	5	1.900"

Flat post caps are drilled and tapped to provide secure mounting for handrail brackets

END CAPS

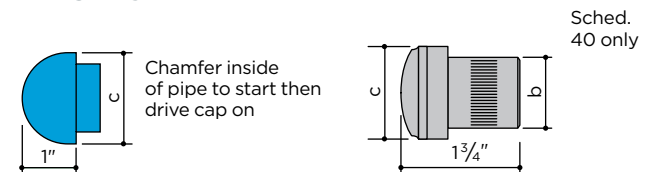

		Pipe	Sched.	c	Pipe	b	c	
● 7181	Al.	1 1/4"	10	1.660"	● 707*	Al.	1 1/4"	1.38 1.660"
● 7481	Al.	1 1/4"	40	1.660"	● 708*	Al.	1 1/2"	1.61 1.900"
● 7281	Al.	1 1/2"	10	1.900"	● 807*	Br.	1 1/4"	1.37 1.660"
● 7581	Al.	1 1/2"	40	1.900"	● 808*	Br.	1 1/2"	1.60 1.900"

\* Satin Finish




9330



807

● ALUMINUM ● STAINLESS


ANGLE FITTING SELECTOR CHART

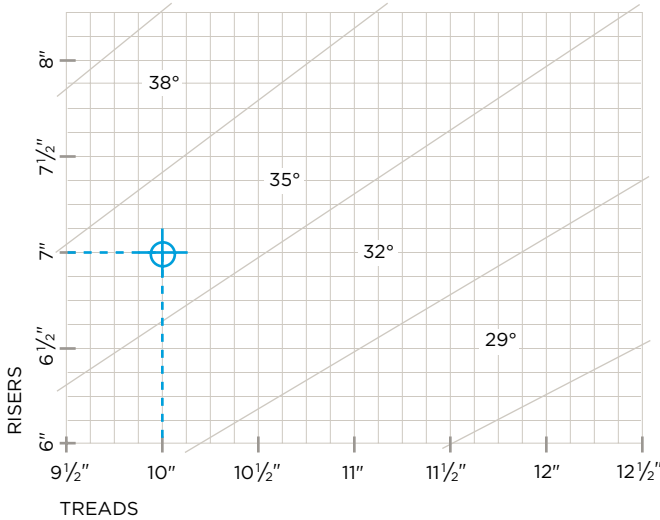

Angle fittings are carried in stock for 29°, 32°, 35°, and 38° angles of inclination. To select the correct angle fitting for a stairway, plot the intersection of riser and tread dimensions on the chart above. The zone into which the intersection falls will indicate the correct angle value for fittings.

Example: A 7" riser and a 10" tread require 35° angle fittings.

POST ELBOW




b = 4" for 4° post elbows, while  
b = 3" for all other post elbows.

45°α	Pipe	Sched.	c	r
● 7408	Alum.	1 1/4"	40	1.660" 2 1/2"
● 7208	Alum.	1 1/2"	10	1.900" 3"
● 7508	Alum.	1 1/2"	40	1.900" 3"


4°α	29°α	32°α	35°α	38°α	Pipe	Sched.	c	r
● 7119	7122	7125	7128		Alum.	1 1/4"	10	1.660" 2 1/2"
● 7416	7419	7422	7425	7428	Alum.	1 1/4"	40	1.660" 2 1/2"
● 7216	7219	7222	7225	7228	Alum.	1 1/2"	10	1.900" 3"
● 7516	7519	7522	7525	7528	Alum.	1 1/2"	40	1.900" 3"
● 9316	9319	9322	9325	9328	St. St.	1 1/2"	5	1.900" 3"

RAIL ELBOW

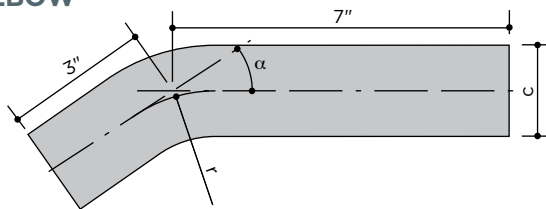


29°α	32°α	35°α	38°α	Pipe	Sched.	c	r
● 7109	7112	7115	7118	Alum.	1 1/4"	10	1.660" 2 1/2"
● 7409	7412	7415	7418	Alum.	1 1/4"	40	1.660" 2 1/2"
● 7209	7212	7215	7218	Alum.	1 1/2"	10	1.900" 3"
● 7509	7512	7515	7518	Alum.	1 1/2"	40	1.900" 3"
● 9309	9312	9315	9318	St. St.	1 1/2"	5	1.900" 3"

RETURN ELBOW

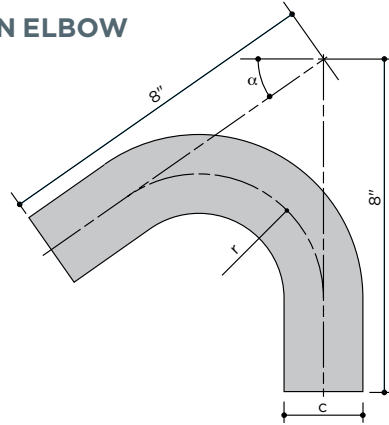

29°α	32°α	35°α	38°α	Pipe	Sched.	c	r
● 7179	7182	7185	7188	Alum.	1 1/4"	10	1.660" 2 1/2"
● 7479	7482	7485	7488	Alum.	1 1/4"	40	1.660" 2 1/2"
● 7279	7282	7285	7288	Alum.	1 1/2"	10	1.900" 3"
● 7579	7582	7585	7588	Alum.	1 1/2"	40	1.900" 3"
● 9379	9382	9385	9388	St. St.	1 1/2"	5	1.900" 3"

ANGLE TEE

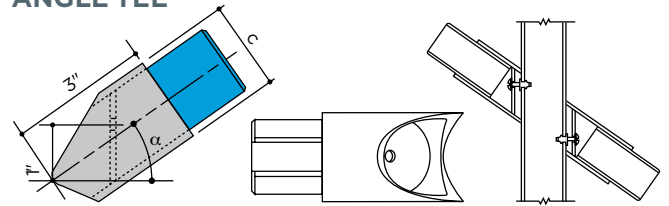


45°α	Pipe	Sched.	c
● 7451	Alum.	1 1/4"	40 1.660"
● 7551	Alum.	1 1/2"	40 1.900"

4°α	29°α	32°α	35°α	38°α	Pipe	Sched.	c
● 7139	7142	7145	7148		Alum.	1 1/4"	10 1.660"
● 7444*	7439	7442	7445	7448	Alum.	1 1/4"	40 1.660"
● 7244*	7239	7242	7245	7248	Alum.	1 1/2"	10 1.900"
● 7544*	7539	7542	7545	7548	Alum.	1 1/2"	40 1.900"
● 9344*	9339	9342	9345	9348	St. St.	1 1/2"	5 1.900"

\*On 4° angle tees, the screw hole is located in the center of the washer.

RAMP RAIL ELBOW


angle	slope	gradient
4°	14:1	7.0%
7°	8:1	12.3%
10°	6:1	17.6%

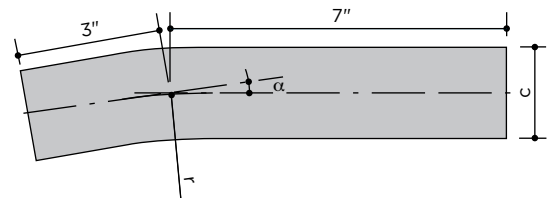

4°α	7°α	10°α	Pipe	Sched.	c	r
● 7405	7406	7407	Alum.	1 1/4"	40	1.660" 2 1/2"
● 7205	7206	7207	Alum.	1 1/2"	10	1.900" 3"
● 7505	7506	7507	Alum.	1 1/2"	40	1.900" 3"
● 9305			St. St.	1 1/2"	5	1.900" 3"


● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STAINLESS

**COVER FLANGE**

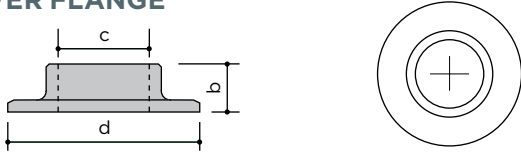

		Pipe	Sched.	b	c	d
● 710	Aluminum	1 1/4"	all	1"	1.688"	3 13/16"
● 711	Aluminum	1 1/2"	all	1"	1.938"	4"
● 810	Bronze	1 1/4"	all	1"	1.688"	3 13/16"
● 811	Bronze	1 1/2"	all	1"	1.938"	4"
● 411	Nickel-Silver	1 1/2"	all	1"	1.938"	4"
● 211	Stainless	1 1/2"	all	7/8"	1.938"	4 1/2"


**HEAVY-DUTY FLOOR FLANGE**

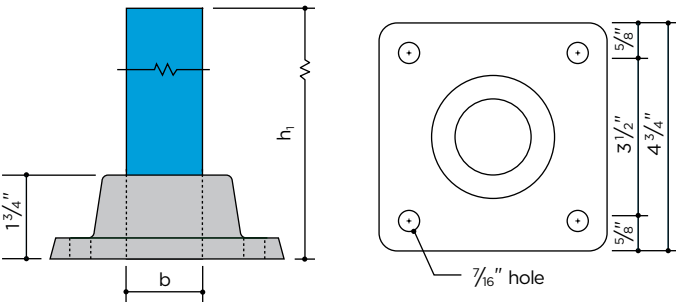

		Pipe	Sched.	h <sub>1</sub>	b
● 7471	Aluminum	1 1/4"	40	12"	1.360"
● 7271	Aluminum	1 1/2"	10	12"	1.667"
● 7571	Aluminum	1 1/2"	40	12"	1.585"
● 9371*	Aluminum	1 1/2"	5	18"	1.750"

\* For use with Stainless Steel System. See page 21 for anchor bolt.


**FLOOR FLANGE †**

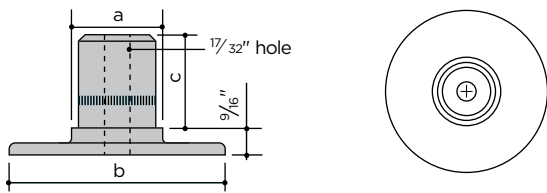

		Pipe	Sched.	a	b	c
● 7170	Aluminum	1 1/4"	10	1.660"	4"	1 13/16"
● 727	Aluminum	1 1/4"	40	1.660"	4"	1 13/16"
● 7270	Aluminum	1 1/2"	10	1.900"	4 1/2"	2 1/16"
● 728	Aluminum	1 1/2"	40	1.900"	4 1/2"	2 1/16"
● 827	Bronze	1 1/4"	40	1.660"	4"	1 13/16"
● 828	Bronze	1 1/2"	40	1.900"	4 1/2"	2 1/16"
● 1328	Nickel-Silver	1 1/2"	10	1.900"	4 1/2"	2 1/16"

**OVAL FLOOR FLANGE †**

Aluminum only


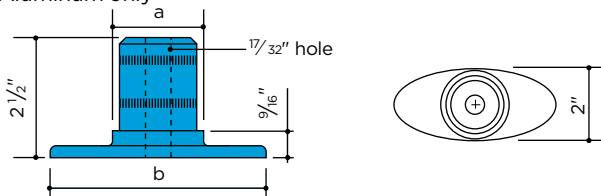


		Pipe	Sched.	a	b
● 749	Aluminum	1 1/4"	40	1.660"	4"
● 750	Aluminum	1 1/2"	40	1.900"	4 1/2"

† When using these floor flanges for surface mounting of posts, care must be taken to provide adequate lateral bracing or end support. For freestanding railings, use the heavy-duty floor flange.

**FASCIA FLANGE**

Fascia flanges are supplied complete with two 3/8" stainless steel bolts for assembly to pipe posts. Stainless steel fascia flanges use two round stand-offs and a stainless steel tubular reinforcing bar. The aluminum and bronze fascia flanges use a single adapter bar and a solid aluminum reinforcing bar.

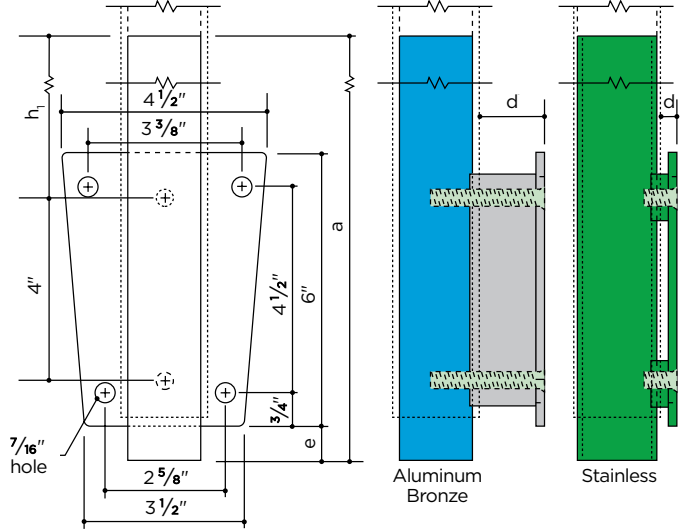


		Pipe	Sched.	a	b	c	d	e	h <sub>1</sub>
● 7190	Alum.	1 1/4"	10	15"	5/16"	1.660"	7/16"	3/4"	9 1/4"
● 7191	Alum.	1 1/4"	10	15"	5/16"	1.660"	19/16"	3/4"	9 1/4"
● 755	Alum.	1 1/4"	40	15"	5/16"	1.660"	7/16"	3/4"	9 1/4"
● 756	Alum.	1 1/4"	40	15"	5/16"	1.660"	19/16"	3/4"	9 1/4"
● 7290	Alum.	1 1/2"	10	15"	5/16"	1.900"	7/16"	1"	9 1/4"
● 7291	Alum.	1 1/2"	10	15"	5/16"	1.900"	19/16"	3/4"	9 1/4"
● 7293	Alum.	1 1/2"	10	24"	5/16"	1.900"	7/16"	3/4"	18 1/4"
● 7294	Alum.	1 1/2"	10	24"	5/16"	1.900"	19/16"	1"	18 1/4"
● 757	Alum.	1 1/2"	40	15"	5/16"	1.900"	7/16"	1/2"	9 1/4"
● 758	Alum.	1 1/2"	40	15"	5/16"	1.900"	19/16"	1/2"	9 1/4"
● 7593	Alum.	1 1/2"	40	24"	5/16"	1.900"	7/16"	1"	18 1/4"
● 7594	Alum.	1 1/2"	40	24"	5/16"	1.900"	19/16"	1/2"	18 1/4"
● 8893	Bronze	1 1/2"	40	24"	5/16"	1.900"	7/16"	3/4"	18 1/4"
● 8894	Bronze	1 1/2"	40	24"	5/16"	1.900"	19/16"	3/4"	18 1/4"
● 9390	St. St.	1 1/2"	5	26"	1/4"	1.900"	3/8"	1/2"	20 1/2"
● 9391	St. St.	1 1/2"	5	26"	1/4"	1.900"	1 1/2"	1/2"	20 1/2"

See page 21 for anchor bolt.

**ROOF RAILING FLANGE**

Aluminum only

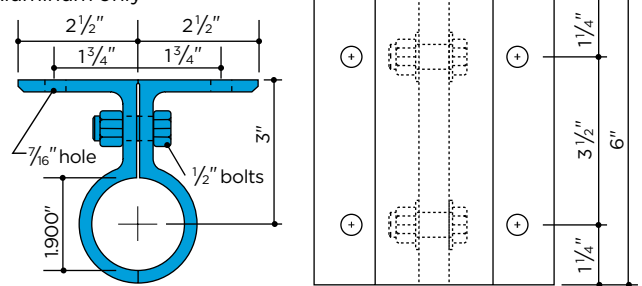

		Pipe	Sched.
● 748	Aluminum	1 1/2"	all


See page 21 for anchor bolt.

PIPE RAILINGS

● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STAINLESS

**TOE BOARD**



20' lengths



	lb/ft
● 6446 Alum.	1.13

**TOE BOARD CLAMPS**

For 1 1/2" pipe

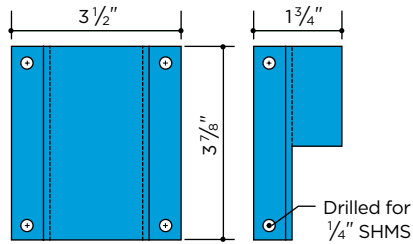


● 746 Aluminum	● 747 Aluminum
----------------	----------------




Mixed Use Building, New York, NY, Bellwood NY Inc., New York, NY (Contractor/Fabricator).

Toe board clamps are supplied with stainless steel screws and nuts.

**Assembly Details**

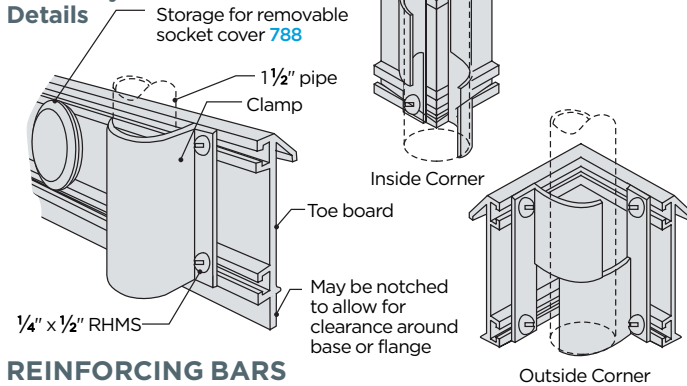

**REINFORCING BARS**

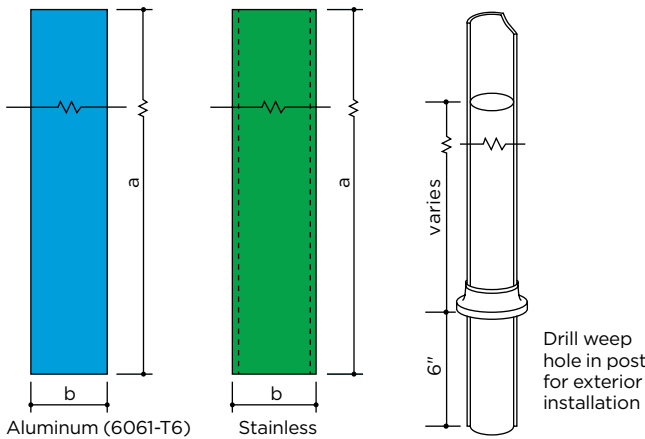


	Pipe	Sched.	b	a
● 7192 Aluminum	1 1/4"	10	1.427"	15"
● 7492** Aluminum	1 1/4"	40	1.360"	15"
● 7292* Aluminum	1 1/2"	10	1.667"	15"
● 7295* Aluminum	1 1/2"	10	1.667"	24"
● 7592** Aluminum	1 1/2"	40	1.585"	15"
● 7595** Aluminum	1 1/2"	40	1.585"	24"
● 9392 Stainless	1 1/2"	5	1.750" x .120" wall	26"

\* For use with aluminum and nickel-silver pipe.  
 \*\* For use with aluminum and bronze pipe.

Floor mounting is best accomplished by mounting in concrete. Post inserts are recommended for reinforcing floor-mounted posts.


**REMOVABLE RAIL SOCKET, COVER AND COLLAR**

**SOCKET**

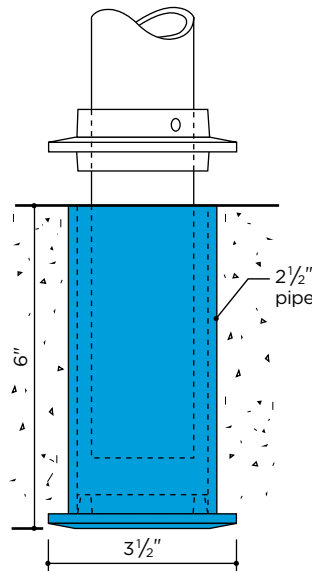


● 786 Aluminum

**PIPE COLLAR**  
 For 1 1/2" pipe only

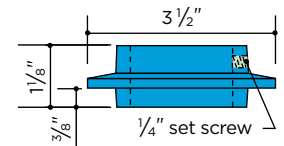

● 787 Aluminum

**SOCKET COVER**




● 788 Aluminum

Socket cover fits tightly but can be pried loose with a screwdriver. When railing is in place, cover may be stored in the side of the toe board.

● ALUMINUM ● STAINLESS ● STEEL

**GATE HINGE**

For 1½" aluminum pipe only

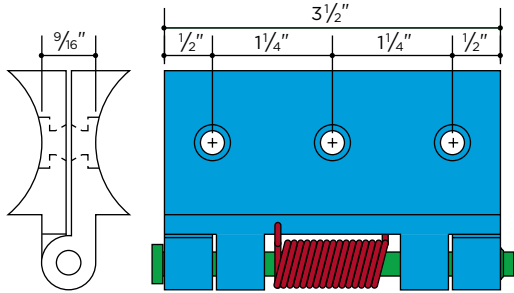


● 782/3 Aluminum

Supplied in sets of two—one plain and one with a self-closing spring

**GATE LATCH AND STOP**

For 1½" aluminum pipe only

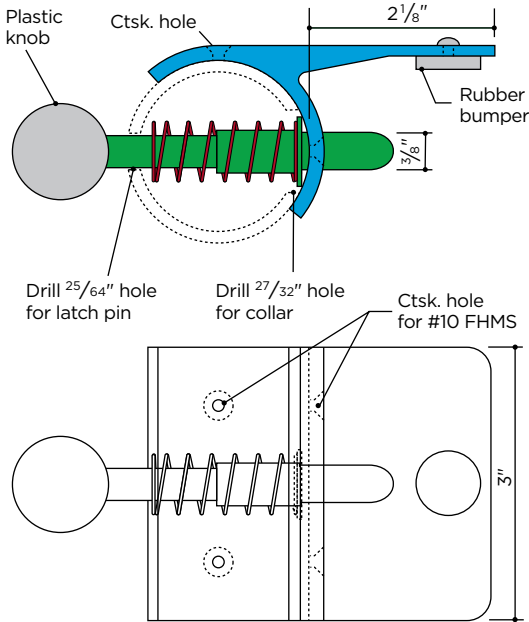

● 784 Aluminum

**SCOTCH-WELD® EPOXY ADHESIVE**

Catalog No. 3M EC-2216 B/A ClearAmber  
Recommended for splice joints using connector sleeves.  
The areas to be joined should be cleaned thoroughly.  
The adhesive is mixed according to manufacturer's directions.



Tubes — 4 oz. total

**MANUAL RIVET HEADER**

The Manual Rivet Header is a low-cost hand tool for setting the internally threaded tubular rivets.




Thread Setter™

**TUBULAR RIVETS**

● Aluminum

Set tubular rivet in hole, using setting tool. Upset rivet by pressing handles together.

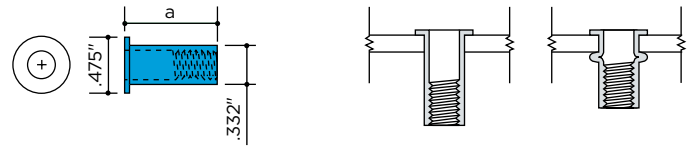


	a	
● A25-140 Aluminum	.745"	Use with schedule 5 or 10 pipe
● A25-200 Aluminum	.808"	Use with schedule 40 pipe

The internally threaded tubular rivet is easily set in Connectorail® pipe wall. The rivet provides high-strength ¼"- 20 threads for blind attachment of Connectorail® tee fittings.

**SEMS SCREWS AND THROUGH BOLT**

● Stainless Steel

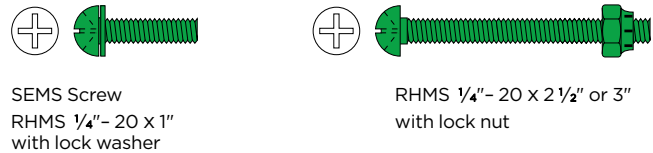

SEMS Screw  
RHMS ¼"- 20 x 1"  
with lock washer

RHMS ¼"- 20 x 2 ½" or 3"  
with lock nut

**SEMS Screws:** SEMS Screws prevent accidental omission of lock washers and subsequent loosening of joints. The combination of ¼"- 20 x 1" stainless steel RHMS with lock washers and internally threaded tubular rivet fasteners provides connections of ample strength to develop the full loading capacity of Connectorail® pipe.

**Through Bolts:** Where two 90° tees are mounted opposite each other to form a cross assembly, a stainless steel through bolt with lock nut may be used.

For 1¼" pipe, use ¼"-20 x 2 ½" RHMS with lock nut.  
For 1½" pipe, use ¼"-20 x 3" RHMS with lock nut.

**SLEEVE ANCHOR BOLT**

● 3/8" x 3" Steel



GSA Spec. FF-S-325, 3.2.2.3.1.2


The **Sleeve Anchor Bolt** is an all steel, rust-proofed, multi-purpose anchor bolt intended for use in a wide range of masonry materials. The 3/8" bolt is recommended for use with **Heavy-Duty Floor Flanges**.

● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STAINLESS


Aluminum brackets are available with a mill finish or a clear anodized finish—AA-M32-C22-A31 (204R1). When designating clear anodized brackets, add the suffix -A to catalog number listed (e.g. 322-A).

**POST BRACKETS**



Satin Finish

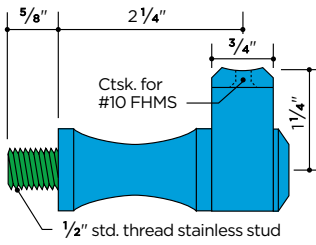


● 322 Aluminum



	For use with pipe railings	a	b
● 402	Aluminum	2 1/4"	1 5/8"
● 402L	Aluminum	2 1/2"	1 5/8"
● 404	Aluminum	2 3/4"	1 5/8"
● 802	Bronze	2 1/4"	1 5/8"
● 1302	Nickel-Silver	2 1/4"	1 5/8"
● 222	Stainless	2 1/4"	1 13/16"
● 222L	Stainless	2 1/2"	1 5/8"

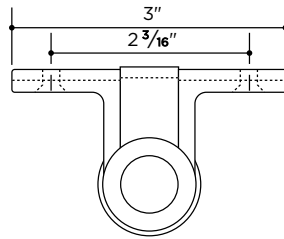


Aluminum, bronze and nickel-silver detail



Stainless detail


**BRACKET POST ADAPTERS**

Satin Finish

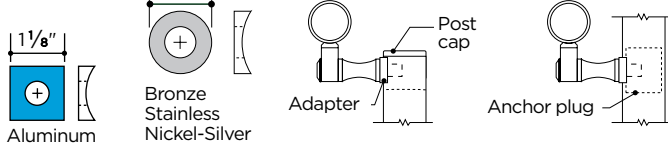

		Pipe Size	Schedule	Clear Hole
● 7161	Aluminum	1 1/4"	all	1/2"
● 7261	Aluminum	1 1/2"	all	1/2"
● 8661	Bronze	1 1/4"	all	1/2"
● 8861	Bronze	1 1/2"	all	1/2"
● 1361	Nickel-Silver	1 1/2"	all	1/2"
● 9161	Stainless	1 1/4"	all	1/2"
● 9361	Stainless	1 1/2"	all	1/2"

**ANCHOR PLUGS**

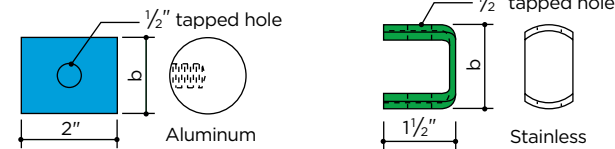


		Pipe Size	Schedule	b
● 7162	Aluminum	1 1/4"	10	1.427"
● 7462	Aluminum	1 1/4"	40	1.360"
● 7262	Aluminum	1 1/2"	10	1.667"
● 7562	Aluminum	1 1/2"	40	1.585"
● 9362	Stainless	1 1/2"	5	1.750"


Anchor plugs provide secure mounting for brackets supporting intermediate rails. Aluminum anchor plugs are machined from solid extruded stock; the stainless steel anchor plug is fabricated from heavy metal.

**TWO-PIECE MOUNTING BRACKETS**

Satin Finish

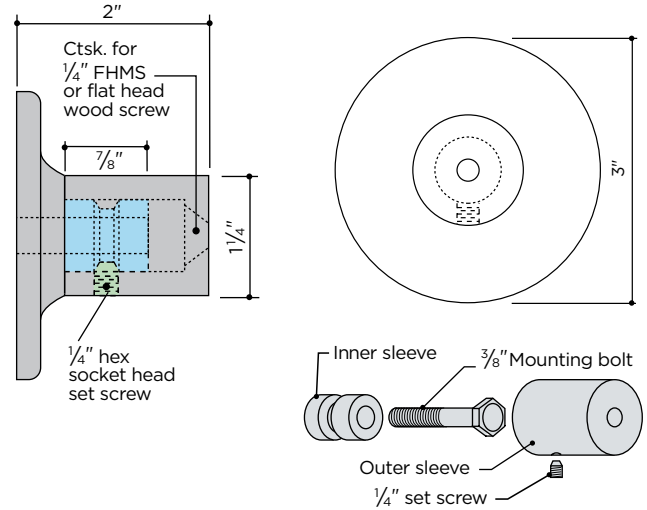


● 168 Aluminum  
● 898 Bronze  
● 298 Stainless

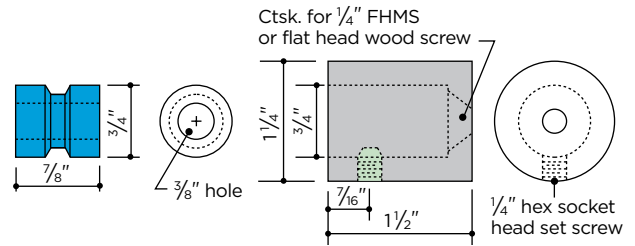

For elevator car handrails

● 166 Aluminum  
● 896 Bronze  
● 196 Nickel-Silver  
● 296 Stainless

**ADAPTERS**

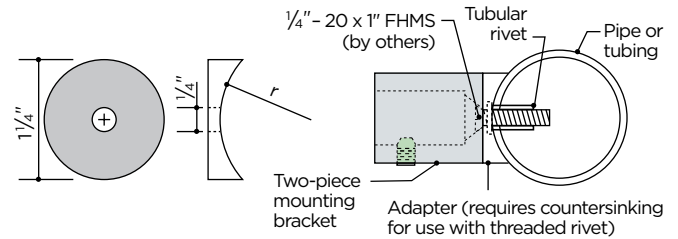


		r	Use With
● 7164	Aluminum	.830"	1.660" OD
● 7264	Aluminum	.950"	1.900" OD
● 8864	Bronze	.950"	1.900" OD
● 8964	Bronze	.750"	1.500" OD
● 5264	Nickel-Silver	.750"	1.500" OD
● 5364	Nickel-Silver	.950"	1.900" OD
● 9164	Stainless	.830"	1.660" OD
● 9364	Stainless	.950"	1.900" OD

- ALUMINUM
- BRONZE
- NICKEL-SILVER
- STAINLESS


Aluminum brackets are available with a mill finish or a clear anodized finish—AA-M32-C22-A31 (204R1). When designating clear anodized brackets, add the suffix -A to catalog number listed (e.g. 307-A).

**SELF-ALIGNING**

Satin Finish, except as noted

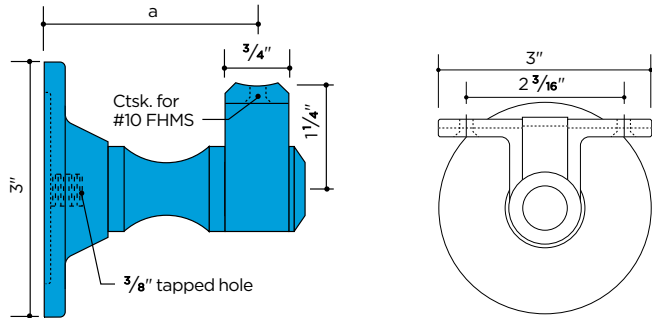


	a
● 307 Aluminum	2 1/2"
● 308 Aluminum	3"

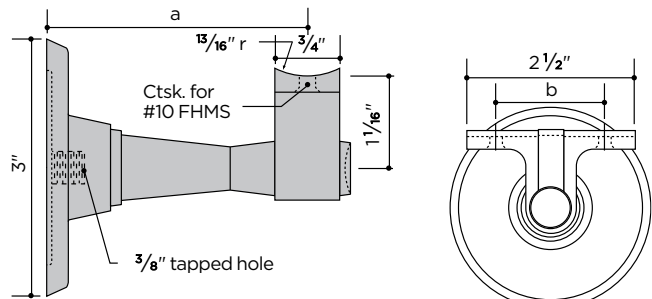

	a	b
● 321 Aluminum	2 1/4"	1 5/8"
● 403 Aluminum	3"	1 5/8"
● 405 Aluminum	3 1/2"	1 5/8"
● 842* Bronze	2 1/4"	1 5/8"
● 801* Bronze	2 1/2"	1 5/8"
● 803* Bronze	3"	1 5/8"
● 1303* Nickel-Silver	3"	1 5/8"
● 1342* Nickel-Silver	2 1/4"	1 5/8"
● 242 Stainless	2 1/4"	1 13/16"
● 221 Stainless	2 1/2"	1 13/16"
● 223 Stainless	3"	1 13/16"

\*Lacquered


**EXTRUDED-UNPOLISHED**

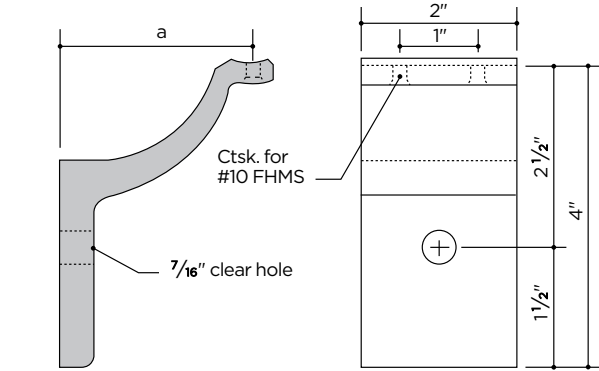

	a
● 478 Aluminum	2 1/2"
● 498 Aluminum	3"
● 892 Bronze	2 1/2"
● 894 Bronze	3"
● 192 Nickel-Silver	2 1/2"
● 218† Stainless	2 1/2"
● 220† Stainless	3"

† Satin Finish


**CAST**

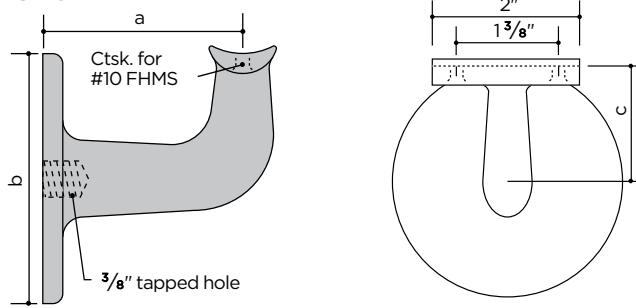


	a	b	c
● 376 Aluminum	2 1/2"	3 1/8"	1 9/16"
● 389 Aluminum	3 1/8"	3 3/4"	1 7/8"
● 375* Bronze	2 1/2"	3 1/8"	1 9/16"
● 319* Bronze	3 1/8"	3 3/4"	1 7/8"
● 176* Nickel-Silver	2 1/2"	3 1/8"	1 9/16"
● 275 Stainless	2 1/2"	3 1/8"	1 9/16"

**STAMPED**

Burnished Finish

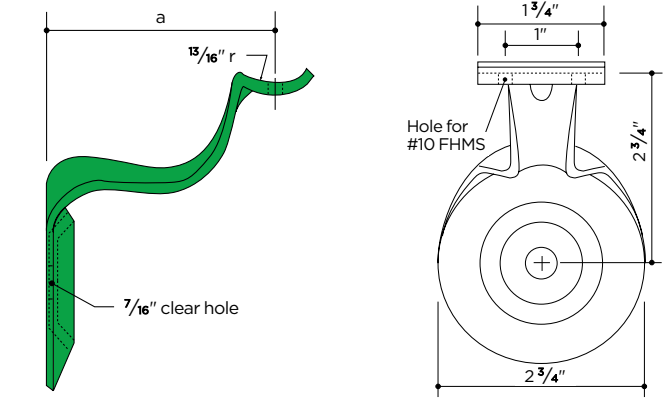

	a
● 1022 Stainless	2 1/2"
● 1026 Stainless	3"

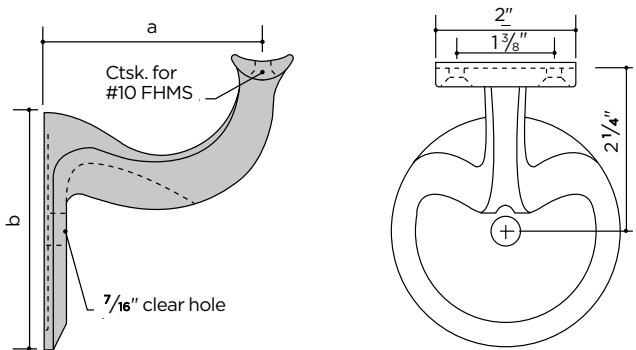


	a	b
● 384 Aluminum	2 1/2"	2 3/4"
● 316 Aluminum	3"	3 1/4"
● 388* Bronze	2 1/2"	2 3/4"
● 318* Bronze	3"	3 1/4"
● 1088 Stainless	2 1/2"	2 3/4"

\*Lacquered


CENTER POST BRACKETS

Mill Finish

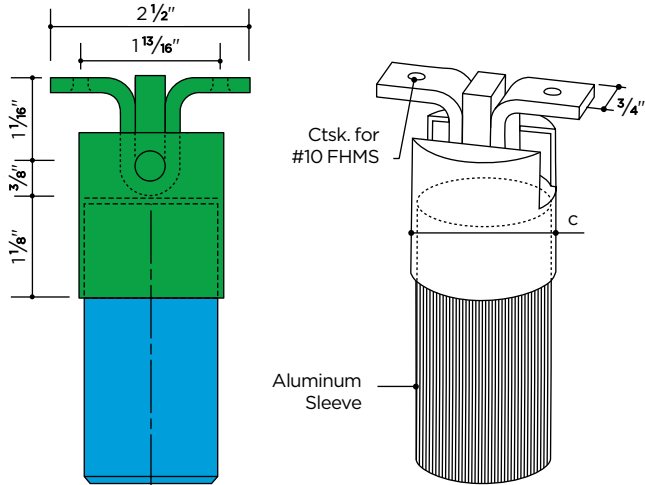


For center mounting of flat-bottomed handrail moulding onto stainless Connectorail® posts

Flat	Pipe	Sched.	c
● 207 Stainless Steel	1 1/2"	5	1.900"

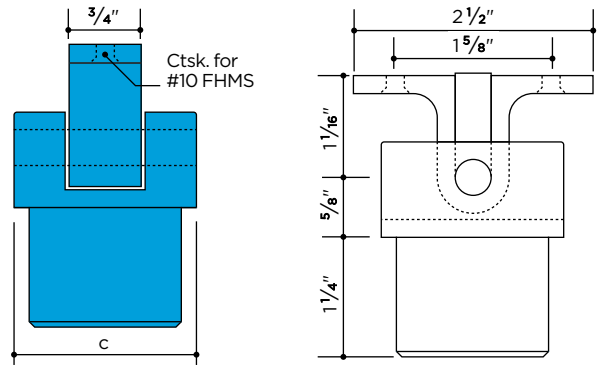


For center mounting of flat-bottomed handrail onto aluminum Connectorail® posts

Flat	Pipe	Sched.	c
● 144 Aluminum	1 1/4"	40	1.660"
● 145 Aluminum	1 1/2"	40	1.900"

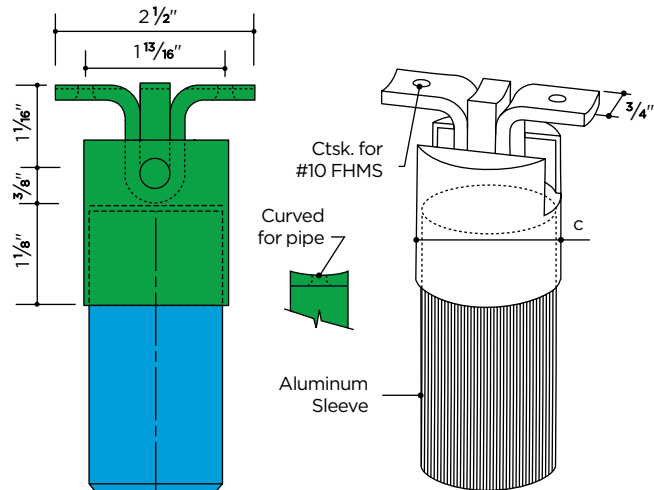

For center mounting of handrail pipe or rounded handrail onto stainless Connectorail® posts

Curved	Pipe	Sched.	c
● 208 Stainless Steel	1 1/2"	5	1.900"

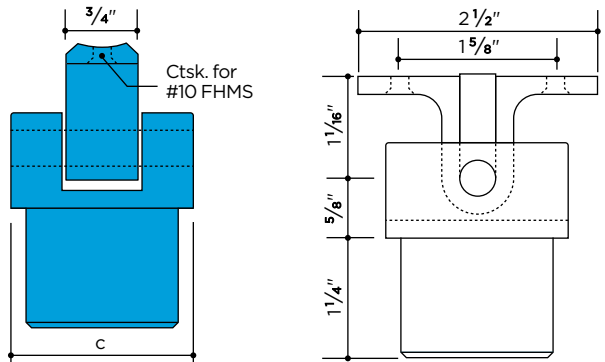

For center mounting of pipe or rounded handrail onto aluminum Connectorail® posts

Curved	Pipe	Sched.	c
● 142* Aluminum	1 1/4"	40	1.660"
● 143* Aluminum	1 1/2"	40	1.900"


\* Also available in clear anodized AA-M32-C22-A31 (204R1)



Weldon E Howitt School, Farmingdale, NY, Hamilton Metal Works, Westbury, NY (Fabricator).

Assembly Details

Angle may be adjusted as required

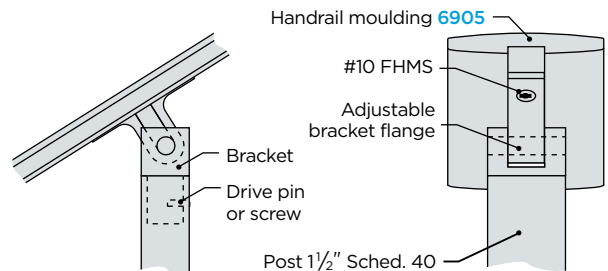


Verify all dimensions before cutting.

● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STAINLESS ● PVC

**INSTALLATION OF PICKET RAILS**

Most current safety codes require reduced openings in railings where they might present a hazard to small children. Pipe railings, including the Connectorail® System, are easily adapted to comply with this requirement, where it applies, by adding balusters or panels. Typical details are shown on this page.

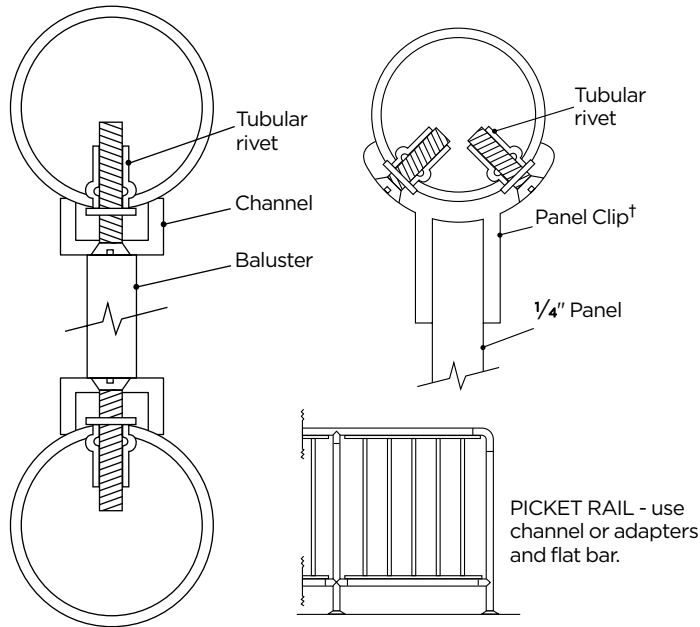


PICKET RAIL - use channel and adapters and flat bar.

†Panel Clip—Aluminum only	1 1/4" Pipe	1 1/2" Pipe
● Aluminum	7160*	7260*
● Aluminum	7460	7560

\* Two-piece panel clips, see below

**PANEL CLIPS**

For aluminum pipe only

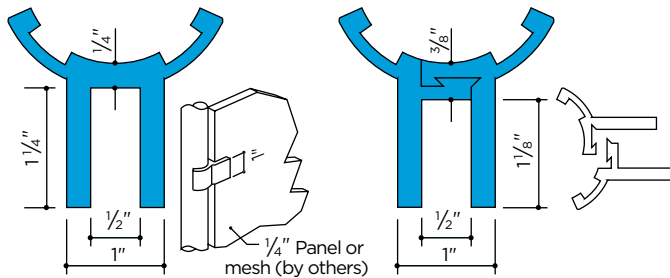


	Pipe	Packages of 4 sets	Pipe
● 7460-5*	Aluminum 1 1/4"	● 7260**	Aluminum 1 1/2"
● 7460†	Aluminum 1 1/4"		
● 7560-5*	Aluminum 1 1/2"		
● 7560†	Aluminum 1 1/2"		

† Packages of 4 pieces

\* 5' Length


\*\* Two-piece assembly

**INSTALLATION OF PANEL RAILS**

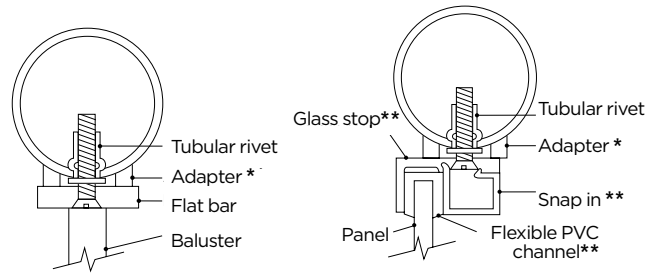


* Adapters	1 1/4" Pipe	1 1/2" Pipe
● Aluminum	7161	7261
● Bronze	8661	8861
● Stainless	9161	9361

** Glass Stop	Glass Stop	Snap-in
● Aluminum, Mill Finish	8106	8107
● Aluminum, Anodized	8206	8207
● Bronze	4506	4507
● Flexible PVC	8708	

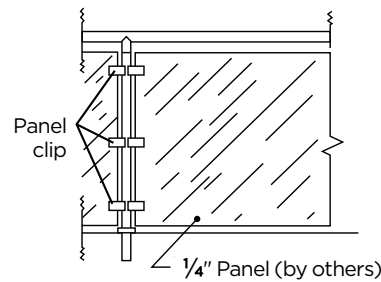

**PANEL CLIPS**

For mounting to flat surface, Satin Finish

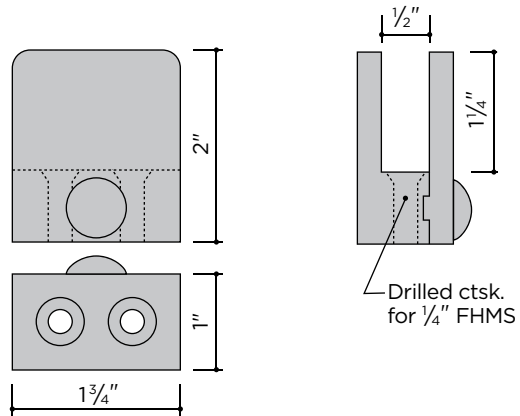

● 113	Aluminum	● 413	Nickel-Silver
● 813	Bronze	● 213	Stainless

Plug (packed separately) is inserted following installation and may be held in place with epoxy or other sealant.

## SPECIAL CHARACTERISTICS

**Connectorail®** is a pre-engineered pipe railing system with pre-fabricated components. It is fabricated with ordinary tools and without welding. It is designed to meet established safety standards.

The structural integrity of the railing system depends on proper selection of components, proper number and location of supports, and correct assembly and installation. The data and instructions in this catalog make it easy to meet these conditions (see engineering data on pages 122-129). Most fittings are dimensioned in whole inches to facilitate layout. Confirm dimensions prior to cutting and assembly.

## POSTS

High-strength posts and the use of reinforcing inserts are recommended to permit longer spans and to comply with the most stringent loading requirements. Fascia Flanges and Heavy-Duty Floor Flanges include reinforcing inserts. Refer to page 129 for post spacing tables.

## EXPANSION JOINTS


Expansion joints should be provided for continuous runs in excess of 40' or at places where building structure provides expansion joints. If a joint is provided every 20', the width of the gap should allow  $\frac{1}{8}$ " expansion for each 40°F of expected temperature rise. To make an expansion joint, the internal connector sleeve is left unattached at one end so that it is free to move in and out of the pipe.

## SPLICE JOINTS


Splice joints are secured by internal connector sleeves with the use of epoxy adhesive. Connector sleeves must be ordered separately unless a sleeve is already welded into the fitting, as it is in tees, wall returns, and miter elbows. Sleeves are made for a tight press fit and must be compressed with pliers or "C" clamps to permit them to slip into the pipe. Care must be taken to keep the sleeves round. Pipe ends must be cut square and to accurate length to assure smooth, tight joints.

The areas to be joined should be cleaned thoroughly. The adhesive is mixed according to manufacturer's directions. Do not mix more than you can use within 1/2 hour. Apply adhesive to inside of pipe. Fit components together and wipe off excess adhesive. Leave undisturbed for eight hours—longer in cold weather.

All splices should be made as near as possible to a post, in no event more than 12" from the nearest post.

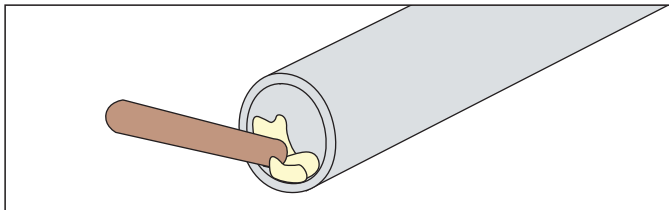

Apply adhesive to inside of pipe.

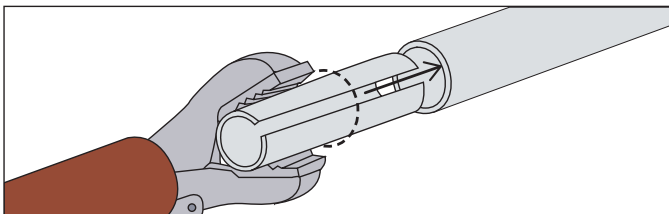


About one half of the 5"-long sleeve should be inside each of the pipe ends.


## TEE FITTINGS

Tee fittings are secured to the post or rail by means of an internally threaded tubular rivet inserted into the wall of the pipe and a stainless steel machine screw and lock washer. When two 90° tees are mounted directly opposite each other to form a cross, a stainless steel through bolt and lock nut may be used.


Drill pipe with drill size Q or  $\frac{11}{32}$ " hole. Screw a rivet sleeve-side first onto the mandrel of the tool. Hold the tool in one hand. Using the tool, insert the rivet into the hole until the tool comes to rest against the parent material. Upset rivet by pressing handles together.

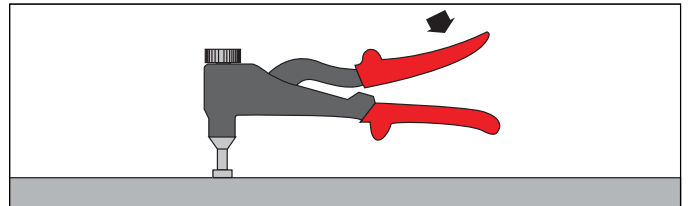

Set tubular rivet in hole, using setting tool. Upset rivet by pressing handles together.

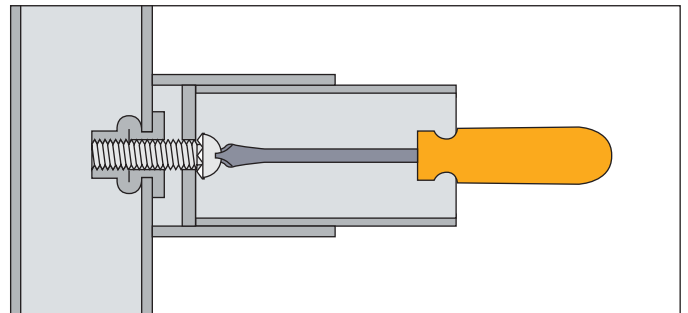

Draw the fitting up tight with a stainless steel screw and lock washer.

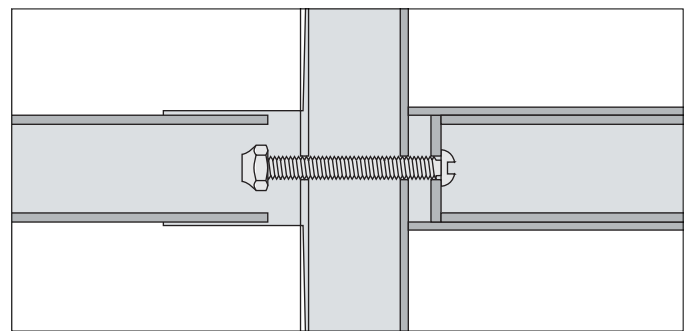


Draw the fittings up tightly from both sides, using a stainless steel lock nut.

The use of a lock washer or lock nut is essential because the assembly must remain tight once it is completed. There is no way to re-tighten an assembled railing. Stainless steel screws are required because they provide maximum strength. The 1"-long screws are supplied with the lock washer already in place.

To locate holes to be drilled for angle tees and crosses, request our drilling template or make your own template as follows: Draw a rectangle of a width equal to the circumference of the pipe (5.21" for  $\frac{1}{4}$ " pipe, 5.97" for  $\frac{1}{2}$ " pipe), about 3" to 4" high.

## ANGLED TEE FITTINGS

Draw the horizontal and vertical center lines. Draw two more vertical lines at half the distance between center line and edges of the rectangle. On the new lines, mark 1" above and below the horizontal center line. Wrap the template around the post so that its horizontal center line is on a level with the intersection of center lines of the post and the rail. The marks on the template will indicate the location of holes.

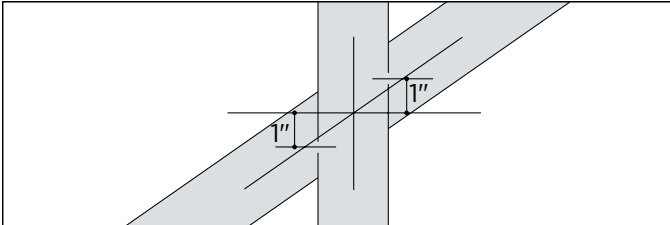


Holes for angle tees, except 4° ramp tee, are located 1" above and below intersection of center lines of pipe, regardless of stair angle.

## MOUNTING POSTS

**Embedding in concrete:** Posts embedded in concrete should be set to a depth of 5" below the surface of the floor or tread. Allow for a 1" grout pad beneath post. Provide a hole 2 1/2" to 3" in diameter to leave room for grouting cement and to allow for adjustment to field variations. A quick-setting grout is recommended for setting posts. For outdoor installation, weep holes should be drilled in the posts just above the ground. The reinforcing insert will prevent water from collecting below ground level. Where aluminum surfaces are embedded in concrete that contains corrosive components, a coat of zinc chromate primer or equivalent must be applied.

**Surface Mounting:** Sleeve anchor bolt 3/8" x 3" is recommended for use with heavy-duty floor flange. Drill 3/8" hole in concrete or masonry to 3" depth. Drill holes which conform to ANSI standard carbide bit dimension (.390" to .398"). Clean out dust in hole after drilling. Insert sleeve bolt in hole, hand tighten, then tighten with wrench to a maximum torque of 30 ft. lbs. Use heavy-duty floor flange as a template for locating holes. Minimum distance from centerline of hole to edge of concrete is 2".

**Fascia Mounting:** Disassemble the fascia flange, which includes a reinforcing bar, by removing two screws from the back of the plate. Drill two 7/16" holes in the post, one hole 1 1/4" from the lower end, the second one 4" on center from the first, so that they align with holes in the reinforcing insert. The reinforcing insert is slipped inside the post, and the unit is reassembled and mounted, using 3/8" bolts. While the unit is disassembled, the plate of the fascia flange may be used as a template to locate the holes for mounting the flange.

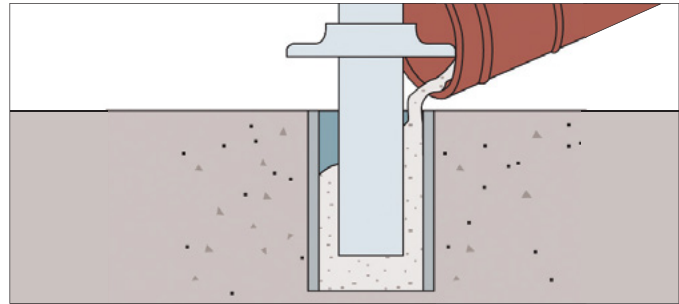

Use reinforcing bar and cover flange. Drill weep hole 1/4" above cover flange. Apply zinc chromate primer or equivalent to surfaces embedded in concrete. Set in floor to a depth of 5" and grout.

For outdoor installation of aluminum, the metal must be kept from direct contact with concrete or dissimilar metal by application of bituminous paint or methacrylate lacquer.

## ANODIZED FINISHES

When clear anodized components are supplied, no further finishing is necessary. Any other specified finishes are the fabricator's responsibility and components will be supplied with mill finish only.

All stainless steel fasteners must be removed before anodizing.



Weldon E. Howitt School, Farmingdale, NY, Hamilton Metalcraft, Westbury, NY (Fabricator).


● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STAINLESS ● MALLEABLE IRON / STEEL

**CAST FLUSH FITTINGS FOR WELDED ASSEMBLY**

Stainless fittings are furnished with a satin finish. Aluminum components are 6063 alloy, mill finish. Cast aluminum components are Almag 35. Satin finish. Cast bronze fittings are lacquered bronze alloy (C86500), which matches the color of red brass (C23000) satin finish. Cast nickel-silver components are lacquered nickel-silver alloy, which matches the color of nickel-silver (C79800), satin finish. Cast iron fittings are cast to match carbon steel (C1010). Fittings shown are made to fit standard pipe sizes.


See pages 16 through 24 for other non-ferrous pipe fittings for 1 1/4" and 1 1/2" pipe.

**PIPE COVER FLANGE**




		Pipe	Sched.	b	c	d
● 714	Aluminum	1"	all	.813"	1.34"	3.625"
● 710	Aluminum	1 1/4"	all	1"	1.69"	3.813"
● 711	Aluminum	1 1/2"	all	1"	1.94"	4"
● 712	Aluminum	2"	all	1"	2.41"	5"
● 810	Bronze	1 1/4"	all	1"	1.69"	3.810"
● 811	Bronze	1 1/2"	all	1"	1.94"	4"
● 411	Nickel-Silver	1 1/2"	all	1"	1.94"	4"
● 214	Stainless	1"	all	7/8"	1.34"	3.750"
● 210	Stainless	1 1/4"	all	7/8"	1.69"	3.750"
● 211	Stainless	1 1/2"	all	7/8"	1.94"	4.500"
● 913	Pressed Steel	3/4"	all	3/4"	1.08"	3.500"
● 914	Pressed Steel	1"	all	7/8"	1.34"	3.750"
● 910	Pressed Steel	1 1/4"	all	7/8"	1.69"	3.750"
● 911	Pressed Steel	1 1/2"	all	7/8"	1.94"	4.500"
● 912	Pressed Steel	2"	all	7/8"	2.41"	4.750"
● 614	Cast Iron/Black	1"	all	.813"	1.34"	3.625"
● 610	Cast Iron/Black	1 1/4"	all	.813"	1.69"	3.875"
● 611	Cast Iron/Black	1 1/2"	all	.813"	1.94"	4.188"
● 612	Cast Iron/Black	2"	all	.813"	2.41"	4.625"
● 1614	Cast Iron/Galv.	1"	all	.813"	1.34"	3.625"
● 1610	Cast Iron/Galv.	1 1/4"	all	.813"	1.69"	3.875"
● 1611	Cast Iron/Galv.	1 1/2"	all	.813"	1.94"	4.188"
● 1612	Cast Iron/Galv.	2"	all	.813"	2.41"	4.625"

**90° ELBOWS**



		Pipe	R
● 958	Steel	1 1/4"	15/16"
● 959	Steel	1 1/2"	11/16"
● 258*	Stainless	1 1/4"	15/16"
● 259*	Stainless	1 1/2"	11/16"

\* Satin Finish



		Pipe	R
● 917	Steel	1"	11 1/16"
● 918	Steel	1 1/4"	13 1/16"
● 919	Steel	1 1/2"	15 1/16"
● 920	Steel	2"	2 3/16"

**FITTINGS FOR WELDED ASSEMBLY**


All fittings are for IPS Schedule 40 pipe, except as noted.

**TEES**


In welded railings, no fittings are used for tee and cross connections. The ends of the pipe are notched with a special tool known as the Arc Fit Pipe Notcher to match the contour of the pipe to be joined. The joint is then welded.

**90° ELBOWS**


Detail showing 1 5/8" radius 90° elbow as wall return



Weld and grind smooth

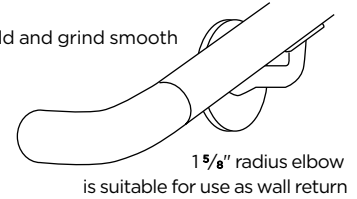


		Pipe	R
● 948	Steel	1 1/4"	27/16"
● 949	Steel	1 1/2"	2 9/16"



		Pipe	R
● 232*	Stainless	1"	2 11/16"
● 225*	Stainless	1 1/4"	2 13/16"
● 226*	Stainless	1 1/2"	2 15/16"
● 915	Steel	1"	2 11/16"
● 925	Steel	1 1/4"	2 13/16"
● 926	Steel	1 1/2"	2 15/16"

\* Satin Finish




Black	Galv.		Pipe	a	e
● 618	1618	Malleable Iron	1 1/4"	1 21/32"	1 1/4"
● 619	1619	Malleable Iron	1 1/2"	1 29/32"	1 1/2"
● 620		Malleable Iron	2"	2 3/8"	1 7/8"
● 720*		Aluminum	2"	2 3/8"	1 7/8"


\* Satin Finish

**OVAL POST FLANGES**

Flour



Angle



		Pipe		Pipe
● 927	Steel	1 1/4"		1 1/4"
● 928	Steel	1 1/2"		1 1/2"
● 942	Steel			1 1/4"
● 943	Steel			1 1/2"

● ALUMINUM ● BRONZE ● STAINLESS ● MALLEABLE IRON / STEEL

**FITTINGS FOR WELDED ASSEMBLY**

All fittings are for IPS Schedule 40 pipe, except as noted.




**90° THREE-WAY ELBOW**



For corner posts


	Pipe	r	R
● 903 Steel	1 1/4"	1/8"	5/16"
● 904 Steel	1 1/2"	1/8"	1 1/16"

**45° ELBOWS**




	Pipe	r	R
● 929 Steel	1"	1"	1 11/16"
● 930 Steel	1 1/4"	1"	1 13/16"
● 933 Steel	1 1/4"	2"	2 13/16"
● 931 Steel	1 1/2"	1"	1 15/16"
● 934 Steel	1 1/2"	2"	2 15/16"
● 932 Steel	2"	1"	2 3/16"

**DRIVE-ON CAPS**

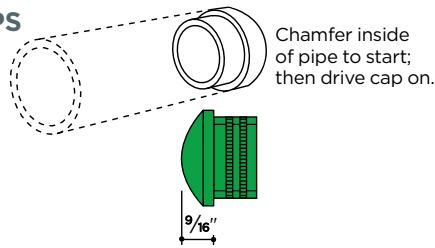

	Pipe	m		Pipe
● 906 Steel	1"	1"	● 212* Stainless	1"
● 907 Steel	1 1/4"	1 1/8"	● 277* Stainless	1 1/4"
● 908 Steel	1 1/2"	1 1/4"	● 278* Stainless	1 1/2"
● 909 Steel	2"	1 3/8"		* Satin Finish


**END CAPS**

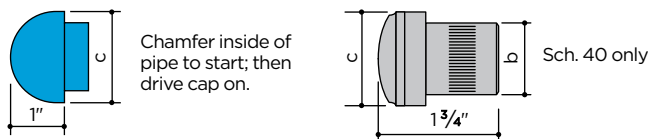

	Pipe	Sched.	c		Pipe	b	c
● 7181 Al.	1 1/4"	10	1.660"	● 707* Al.	1 1/4"	1.38	1.660"
● 7481 Al.	1 1/4"	40	1.660"	● 708* Al.	1 1/2"	1.61	1.900"
● 7281 Al.	1 1/2"	10	1.900"	● 807* Br.	1 1/4"	1.37	1.660"
● 7581 Al.	1 1/2"	40	1.900"	● 808* Br.	1 1/2"	1.60	1.900"

\* Satin Finish

**WALL RETURN**

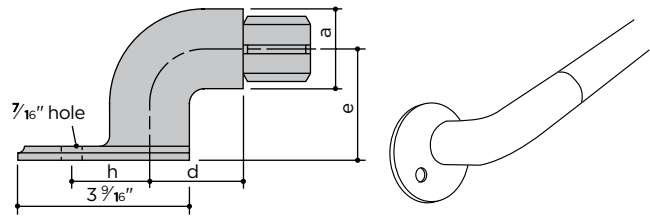

For schedule 40 pipe

Black	Galv.	Pipe	a	d	h	e
● 604	1604 Cast Iron	1 1/4"	1 21/32"	1 15/16"	1 5/8"	2 1/2"
● 664	1664 Cast Iron	1 1/4"	1 21/32"	1 15/16"	1 5/8"	3"
● 605	1605 Cast Iron	1 1/2"	1 29/32"	2 1/16"	1 11/16"	2 1/2"
● 665	1665 Cast Iron	1 1/2"	1 29/32"	2 1/16"	1 11/16"	3"


For light wall structural pipe schedule 10

● 3604	Cast Iron	1 1/4"	1 21/32"	1 15/16"	1 5/8"	2 1/2"
● 3605	Cast Iron	1 1/2"	1 29/32"	2 1/16"	1 11/16"	2 1/2"

For schedule 40 pipe

● 705*	Aluminum	1 1/2"	1 29/32"	2 1/16"	1 11/16"	2 1/2"
● 759*	Aluminum	1 1/4"	1 21/32"	1 15/16"	1 5/8"	3"


\* Satin Finish

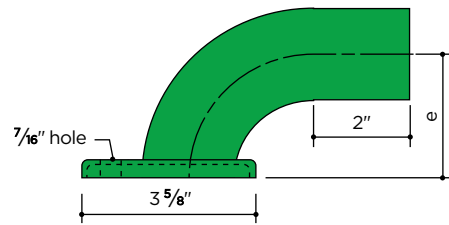

Schedule 40 pipe return and 1/8" formed flange are joined by a concealed weld.


	Pipe	e
● 215F* Stainless	1 1/4"	2 1/2"
● 216F* Stainless	1 1/2"	2 1/2"

\* Satin Finish

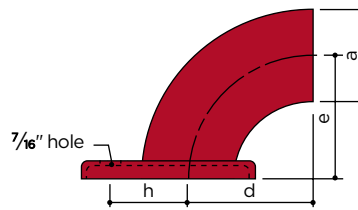

	Pipe	a	d	h	e
● 983 Steel	1 1/4"	1 21/32"	2 7/16"	1 5/8"	2 1/2"
● 984 Steel	1 1/4"	1 21/32"	2 13/16"	1 5/8"	3"
● 985 Steel	1 1/2"	1 29/32"	2 1/4"	1 15/32"	2 1/2"
● 986 Steel	1 1/2"	1 29/32"	2 15/16"	1 15/32"	3"

**POST BRACKET**



	Pipe	a	b
● 373 Aluminum	2 1/2"	1 9/16"	
● 303 Bronze	2 1/2"	1 9/16"	
● 374 Mal. Iron	2 1/2"	1 9/16"	

• Post bracket adapter, pg. 94



PIPE RAILINGS

● ALUMINUM ● STAINLESS ● CAST IRON / MALLEABLE IRON / STEEL

**FITTINGS FOR WELDED ASSEMBLY**

All fittings are for IPS Schedule 40 pipe, except as noted.



**WELD-ON CAPS**

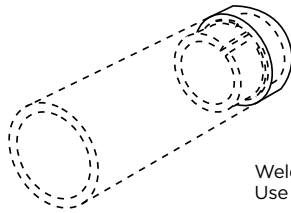

Weld and grind smooth.  
Use of connector is optional.

		Pipe	m
● 936	Steel	1"	1"
● 937	Steel	1 1/4"	1 1/8"
● 938	Steel	1 1/2"	1 1/4"
● 939	Steel	2"	1 3/8"

**CONNECTOR**

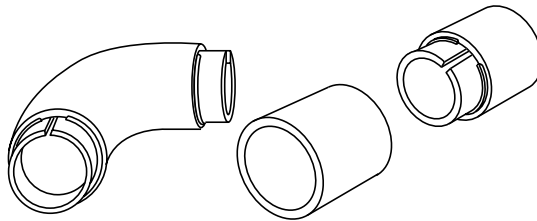


Connector snaps in place with a spring fit, holding elbow and pipe in position for welding.

			Pipe
● 951	Steel	● 291	Stainless 1"
● 952	Steel	● 292	Stainless 1 1/4"
● 953	Steel	● 293	Stainless 1 1/2"
● 954	Steel		2"

**SQUARE POST FITTING**

Cast

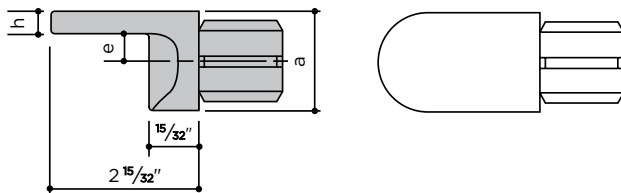


For schedule 40 pipe		Pipe	a	h	e
● 601	Malleable Iron	1 1/4"	121/32"	3/8"	29/64"
● 602	Malleable Iron	1 1/2"	129/32"	7/16"	33/64"
For light wall structural pipe schedule 10					
● 3601	Malleable Iron	1 1/4"	121/32"	3/8"	29/64"
● 3602	Malleable Iron	1 1/2"	129/32"	7/16"	33/64"
For schedule 40 pipe					
● 701*	Aluminum	1 1/4"	121/32"	3/8"	29/64"
● 702*	Aluminum	1 1/2"	129/32"	7/16"	33/64"


\* Satin Finish

**PIPE SPLICE LOCK**

A single allen screw locks the joint

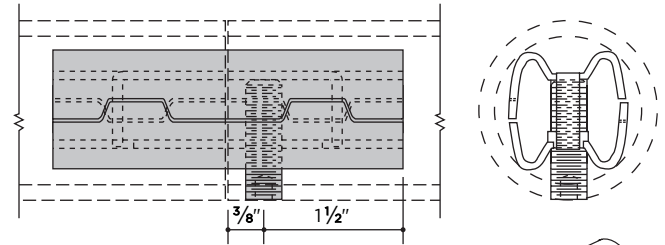

For quick, weldless end-to-end connection of pipe in the shop or in the field. Connections made with the pipe splice lock are flush, permanent, and in perfect alignment. Also suited for expansion joints.

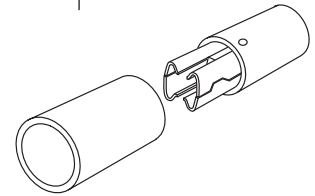

For schedule 40 pipe				For light wall structural pipe schedule 10	
Steel	Galv. Steel	Stainless	Steel	Steel	Pipe
● 921		● 289			1"
● 922	● 1922	● 287	● 901		1 1/4"
● 923	● 1923	● 288			1 1/2"
● 924					2"
					For schedule 5 pipe
		● 286			1 1/4"


**PIPE PLUGS**



For schedule 40 pipe			For light wall structural pipe schedule 10	
Black	Galv.	Pipe	Black	Pipe
● 606	1606	Cast Iron 1"	● 3607	Cast Iron 1 1/4"
● 607	1607	Cast Iron 1 1/4"	● 3608	Cast Iron 1 1/2"
● 608		Cast Iron 1 1/2"		
● 609	1609	Cast Iron 2"		

**SQUARE POST FITTING**

Stamped Steel



For schedule 40 pipe		Pipe	a	b
● 987	Malleable Iron	1 1/4"	1 5/8"	2 5/8"




Sun Valley Music Pavillion, Sun Valley, Idaho, Ruscitto/Latham/Blanton, Sun Valley, Idaho (Architect), Diversified Metal Products, Inc., Idaho Falls, Idaho (Fabricator).

● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STAINLESS

**OD ROUND TUBING**

20' lengths, except as noted  
Mill Finish only, except as noted

● Aluminum	6063-T52
● Bronze	C38500
● Nickel-Silver	C79800
● Stainless	Type 304

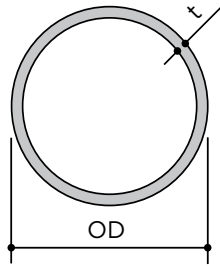


	OD	t	lb/ft	Area	I	S
● Aluminum	1.900"	.109"	.721	.614	.247	.260
● Aluminum	2 1/2"	.125"	1.119	.933	.659	.527
● Aluminum	3"	.125"	1.328	1.129	1.169	.779
● Aluminum	3 1/2"	.125"	1.559	1.325	1.890	1.080
● Bronze	1.900"	.100"	1.750	.440	.108	.144
● Bronze	1.900"	.100"	2.070	.565	.230	.242
● Bronze	2 1/2"	.125"	3.441	.933	.659	.527
● Bronze	3"	.125"	4.500	1.129	1.169	.779
● Bronze††	3 1/2"	.125"	4.850	1.325	1.890	1.080
● Nickel-Silver	1.900"	.100"	1.750	.440	.108	.144
● Nickel-Silver	1.900"	.109"	2.250	.614	.247	.260
● Nickel-Silver†	2 1/2"	.125"	3.400	.933	.659	.527
● Nickel-Silver†	3"	.125"	4.500	1.129	1.169	.779
● Stainless**	1.900"	.062"	1.274	.375	.158	.166
● Stainless	2 1/2"	.062"	1.691	.479	.356	.285
● Stainless	3"	.062"	1.930	.577	.622	.415
● Stainless	4"	.062"	2.550	.804	1.556	.778

\*\* No. 4 Finish  
† 16' lengths †† 12' lengths

**END CAPS**


Satin Finish, except as noted

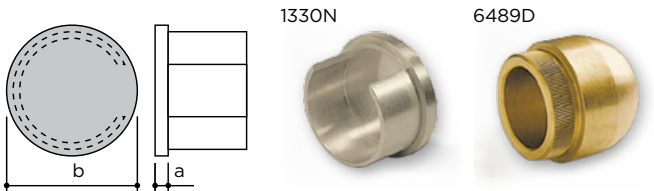

		a	b
● 7280*	Aluminum	1/8"	1.900"
● 1180*	Aluminum	1/8"	2 1/2"
● 1182*	Aluminum	1/8"	3"
● 1181*	Aluminum	1/8"	3 1/2"
● 1282	Bronze	1/4"	1.900"
● 1280	Bronze	1/4"	2 1/2"
● 1283	Bronze	1/4"	3"
● 1281	Bronze	1/4"	3 1/2"
● 6489N	Bronze	1/4"	1.500"
● 6489D	Bronze	•	1.500"
● 5289N	Nickel-Silver	1/4"	1.500"
● 1330N	Nickel-Silver	1/4"	1.900"
● 1332N	Nickel-Silver	1/4"	2 1/2"
● 1333N	Nickel-Silver	1/4"	3"
● 9380	Stainless	1/8"	1.900"
● 1480	Stainless	1/8"	2 1/2"
● 1482	Stainless	1/8"	3"
● 1473N	Stainless	1/8"	4"

\* Mill Finish • Dome-shaped; extends 1" beyond end of tube.


**COVER FLANGE**



		OD	b	c	d
● 711	Aluminum	1.900"	1"	1.94"	4"
● 1125	Aluminum	2 1/2"	1"	2.54"	4 3/4"
● 1123	Aluminum	3"	1"	3.04"	5"
● 811	Bronze	1.900"	1"	1.94"	4"
● 1225	Bronze	2 1/2"	1"	2.54"	4 3/4"
● 1223	Bronze	3"	1"	3.04"	5"
● 411	Nickel-Silver	1.900"	1"	1.94"	4"
● 1325	Nickel-Silver	2 1/2"	1"	2.54"	4 3/4"
● 1323	Nickel-Silver	3"	1"	3.04"	5"
● 211	Stainless	1.900"	7/8"	1.94"	4 1/2"
● 1425	Stainless	2 1/2"	1 1/16"	2.54"	4 7/8"
● 1423	Stainless	3"	1 7/16"	3.04"	6 1/8"

**90° RADIUS ELBOW**

Satin Finish, except as noted

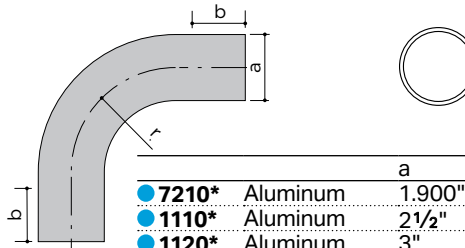


Elbow may be trimmed for use as wall return. For brackets, see pages 22-23.

		a	r	Wall	b
● 7210*	Aluminum	1.900"	3"	.109"	2"
● 1110*	Aluminum	2 1/2"	5"	.125"	2 1/2"
● 1120*	Aluminum	3"	5"	.125"	2 1/2"
● 1122*	Aluminum	3 1/2"	5"	.125"	2 1/2"
● 1222*	Bronze	1.900"	3"	.100"	2 1/2"
● 1210*	Bronze	2 1/2"	5"	.125"	2 1/2"
● 1220*	Bronze	3"	6"	.125"	2 1/2"
● 6489C*	Bronze	1.500"	3"	.100"	2 1/2"
● 1330C*	Nickel-Silver	1.900"	3"	.109"	2 1/2"
● 1332C*	Nickel-Silver	2 1/2"	5"	.125"	2 1/2"
● 1333C*	Nickel-Silver	3"	5"	.125"	2 1/2"
● 9310	Stainless	1.900"	3"	.062"	2"
● 1410	Stainless	2 1/2"	5"	.062"	2 1/2"
● 1420	Stainless	3"	5"	.062"	2 1/2"

\* Mill Finish

**CONNECTOR SLEEVES**

Aluminum, 5" lengths

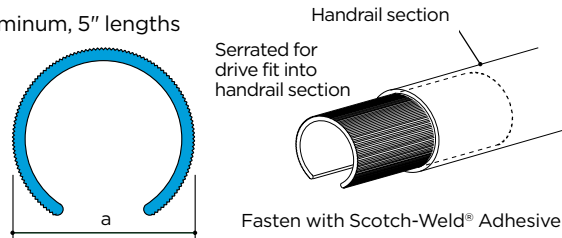

Fasten with Scotch-Weld® Adhesive

		a
● 7063	for 6489 Bronze and 5289 Nickel-Silver	1.500"
● 1363	for 1.900" Nickel-Silver	1.650"
● 1160	for 1.900" Aluminum and 1.900" Bronze	1.682"
● 1163	for 2 1/2" Aluminum, 2 1/2" Bronze and 2 1/2" Nickel-Silver	2.250"
● 1170	for 3" Aluminum, 3" Bronze and 3" Nickel-Silver	2.750"
● 1164	for 3 1/2" Aluminum	3.250"
● 9363	for 1.900" Stainless	1.770"
● 1463	for 2 1/2" Stainless	2.375"
● 1464	for 3" Stainless	2.875"
● 1264	for 3 1/2" Bronze	3.125"
● 1474	for 4" Stainless	3.875"

PIPE RAILINGS

# TRADITIONAL RAILING COMPONENTS

This section illustrates the numerous handrail mouldings, fittings, and ornamental railing components carried in stock in aluminum, bronze, nickel-silver, steel, and stainless steel. Most can be used with the various railing systems described elsewhere in this catalog.

- **Aluminum** extrusions are of alloy 6063 which is preferred for its bright color, corrosion resistance and ease of fabrication. It is suitable for anodizing, including most of the hard coat color finishes.
- **Bronze** extrusions are of alloy C38500, architectural bronze, preferred for its rich gold color and workability.
- **Nickel-Silver** extrusions are of alloy C79800. Sometimes referred to as white bronze, nickel-silver is a copper/nickel alloy. It is similar in color to stainless steel, with golden highlights.
- **Stainless Steel** components are of type 304, 18-8, chrome nickel alloy which has high resistance to corrosion.
- **Steel** handrails are hot-rolled carbon steel, C1010.


Cast aluminum fittings are produced from Almag 35, suitable for clear anodizing. Bronze castings are of alloy C86500 for a good color match with extruded bronze. Nickel-silver fittings are cast to match extrusions. All non-ferrous fittings are satin finished; bronze and nickel-silver fittings are protected with a clear lacquer. Fittings for use with steel handrail are cast from malleable iron, which is weldable and bendable.

It is important to be aware that due to the difference in tolerances between extruded handrail and cast fittings, butt joints require special attention to ensure proper match.

All items are carried in stock in substantial quantities and are available for immediate shipment. Materials are produced and handled with great care. Items are thoroughly protected for shipment by wrapping and/or crating so as to ensure a product well-suited for architectural finishing. For structural engineering data, see pages 122-129. For handrail brackets, see pages 89-97.

The *Americans with Disabilities Act* adopted by Congress in 1992 required circular handrails to be 1¼" minimum and 1½" maximum. However, the *Guidance on the 2010 ADA Standards for Accessible Design - September 2010*, published by the US Department of Justice, has clarified the intent of the dimensional requirements to be an outside diameter of 1¼" to 2".

ADAAG also allows handrails which provide an equivalent gripping surface. ANSI117.1-17 defines this alternative: *equivalent gripping surfaces are permitted provided they have a perimeter dimension of 4" (100 mm) minimum and 6 ¼" (160 mm) maximum and provided their largest cross-section dimension is 2 ¼" (57 mm) maximum.*

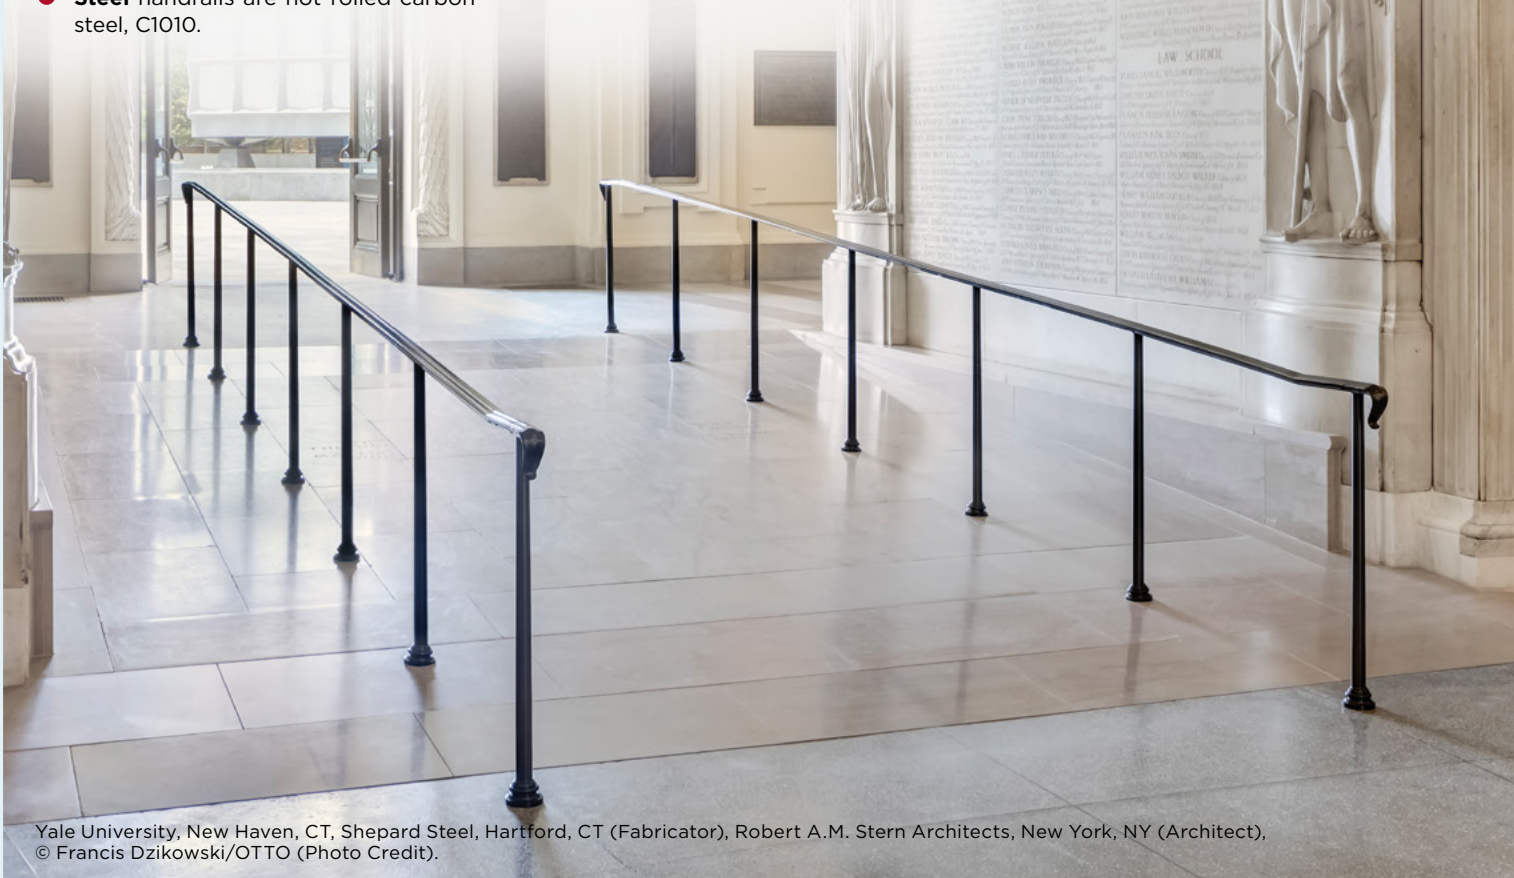


Yale University, New Haven, CT, Shepard Steel, Hartford, CT (Fabricator), Robert A.M. Stern Architects, New York, NY (Architect), © Francis Dzikowski/OTTO (Photo Credit).




Private Residence, Greenwich, CT, Artistic Ironworks LLC, Norwalk, CT (Fabricator).

● ALUMINUM Alloy 6063-T52, Mill Finish, 20' Lengths


Scale: 6" = 1'-0"




● **6931** Aluminum .615 lb/ft  
Fittings: B-C-CC-CL-CR-E-GL-GR-L-N-S-T-V




● **6934** Aluminum .804 lb/ft  
Fittings: B-C-CC-CL-CR-E-GL-GR-J-L-N-S-T-V




● **6930** Aluminum .936 lb/ft  
Fittings: B-C-CC-CL-CR-E-GL-GR-J-L-N-S-T-V




● **6929** Aluminum .670 lb/ft  
Use fittings for **6930**  
Outside profile identical to **6930**, for straight runs only




● **6933** Aluminum .770 lb/ft  
Fittings: B-C-CC-CL-CR-GL-GR-N-S-V




● **6935** Aluminum .980 lb/ft  
Fittings: B-C-CC-CL-CR-E-GL-GR-N-S-T-V




● **6984** Aluminum 1.301 lb/ft  
Fittings: C-N  
\*Use 1 1/2" x 1/4" flat bar for splicing and closing ends




● **6985** Aluminum .977 lb/ft  
Fittings: C-N  
\*Use 1 1/2" x 1/4" flat bar for splicing and closing ends



● **6402** Aluminum 1.51 lb/ft  
Fittings: C-N Use fittings for **6902**




● **6405** Aluminum 1.39 lb/ft  
Fittings: C-N Use fittings for **6985**

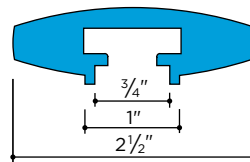


● **6532** Aluminum 1.440 lb/ft  
Fittings: C-N

Mouldings **6530**, **6531**, and **6532** are used with Carlsrail® self-aligning brackets on page 82. Clamping action eliminates drilling and tapping and helps in field alignment with posts and wall attachments. See page 68 for splices, support bar and end cap. Carlsrail® mouldings are designed for non-welded assembly.




● **6530** Aluminum .900 lb/ft  
Fittings: C-N




● **6531** Aluminum .600 lb/ft  
Fittings: C-N

Channel corner bends and channel lateral scrolls are available in aluminum and malleable iron.




● **6902** Aluminum 1.464 lb/ft  
Fittings: C-N

Mouldings **6901** and **6902** are specially designed for use with Carlstadt® aluminum self-aligning brackets **309**, **312**, **313** and **314** shown on pages 92 and 93. A 1" x 1/4" flat bar can be used for splicing and for closing the recess in the handrail moulding.

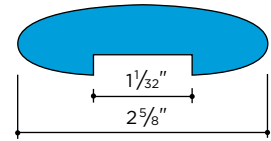


● **6901** Aluminum 1.661 lb/ft  
Fittings: C-N

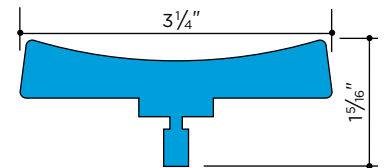


● **6407** Aluminum 2.00 lb/ft  
Fittings: C-N Use fittings for **6907**


T-handrail mouldings **6402**, **6405**, and **6407** are used with Carlstadt® self-aligning brackets on pages 92 and 93. Clamping action eliminates drilling and tapping and helps in field alignment with posts and wall attachment.

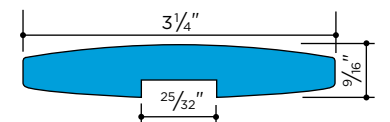

● **6905** Aluminum 1.752 lb/ft  
Fittings: C-N

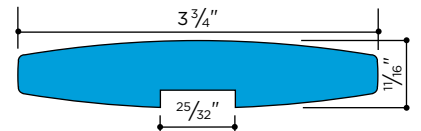

● **6906** Aluminum 2.448 lb/ft  
Fittings: C-N

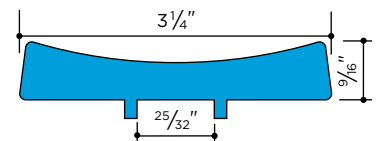


● **6907** Aluminum 1.776 lb/ft  
Fittings: C-N


Mouldings **6905**, **6906**, and **6907** are specially designed for use with Carlstadt® self-aligning brackets shown on pages 90 and 91. A 3/4" x 3/16" flat bar may be used for closing the recess in the handrail moulding.

● ALUMINUM Alloy 6063-T52, Mill Finish, 20' Lengths


Scale: 6" = 1'-0"

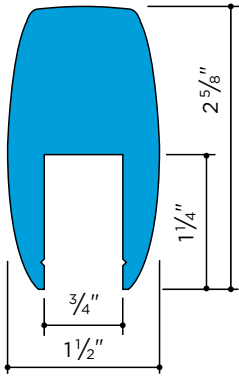


● 1133\* Aluminum 3.02 lb/ft

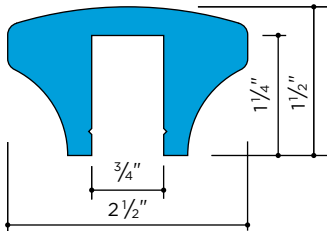


● 1134\* Aluminum 2.40 lb/ft




● 6423\* Aluminum 1.876 lb/ft

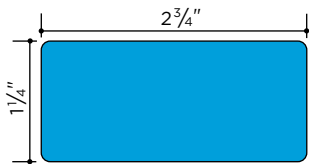


● 6424\* Aluminum 4.124 lb/ft

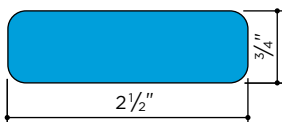


● 6939\* Aluminum 2.214 lb/ft



● 6988\* Aluminum 1.138 lb/ft

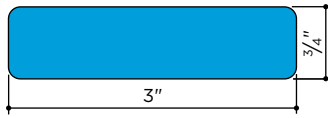


● 6986\* Aluminum 2.684 lb/ft

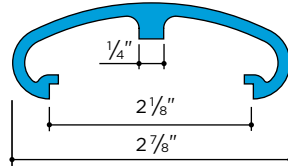


● 6932 Aluminum .852 lb/ft

Fittings: B-C-N-S

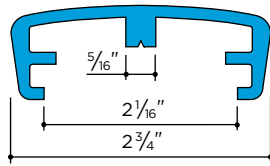


● 6987 Aluminum .858 lb/ft

Fittings: C-N




● 6903\* Aluminum .446 lb/ft

Use with 1" x 1/2" x 1/8" channel

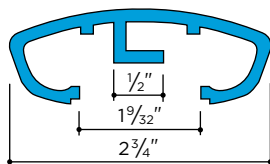

● 6904\* Aluminum .858 lb/ft


Use with 1 1/4" x 3/4" x 1/8" channel

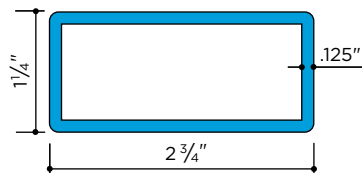

● 6434 Aluminum 6063-T6 1.123 lb/ft


Fittings: N (see page 81)

\* No fittings available.

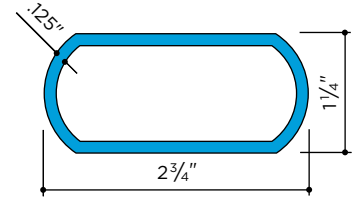


● 6435 Aluminum 6063-T6 1.075 lb/ft

Fittings: C-N (see pages 38 and 81)

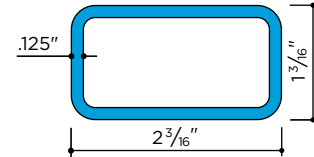

● 6436 Aluminum .888 lb/ft

Fittings: N

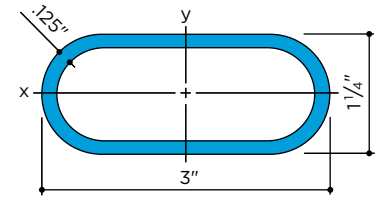

● 6437 Aluminum 1.057 lb/ft

Fittings: N

**Aluminum Handrail Fittings**

Symbols and Letter Designations

When specifying a fitting, add fitting designation to handrail moulding number (e.g. 6930-V). See pages 111 and 114 for available channel sizes.

ALUMINUM


B		Bevel Lamb's Tongue
C		Corner Bend
CC		Channel Corner Bend
CL		Left Channel Lateral Scroll
CR		Right Channel Lateral Scroll
E		Terminal
GL		Left Lateral Scroll
GR		Right Lateral Scroll
J		Round Terminal
L		Corner Piece
N		Square End Piece
S		Straight Lamb's Tongue
T		Center Piece
V		Volute

MALLEABLE IRON


CC		Channel Corner Bend
CL		Left Channel Lateral Scroll
CR		Right Channel Lateral Scroll

● BRONZE Alloy C38500, Mill Finish, 20' lengths, except as noted


Scale: 6" = 1'-0"




● **4531** Bronze 1.93 lb/ft  
Fittings: B-C-E-GL-GR-J-L-N-S-U-V




● **4575** Bronze 2.37 lb/ft  
Fittings: C-N




● **4503** Bronze 2.73 lb/ft  
No fittings available




● **4534** Bronze 2.80 lb/ft  
Fittings: B-C-E-GL-GR-J-L-N-S-T-V

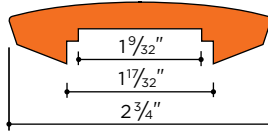


● **4574** Bronze 3.71 lb/ft  
Fittings: C-N




● **6488** Bronze 1.56 lb/ft  
Fittings: N  
16' lengths




● **4530** Bronze 3.10 lb/ft  
Fittings: B-C-E-GL-GR-J-L-N-S-T-V




● **4572** Bronze 2.50 lb/ft  
Fittings: C-N




● **6489** Bronze 1.75 lb/ft  
Fittings: C-D-N




● **4539** Bronze 2.66 lb/ft  
Fittings: B-C-CC-CL-CR-GL-GR-N-S-V




● **4573** Bronze 4.05 lb/ft  
Fittings: C-N




● **4535** Bronze 3.35 lb/ft  
Fittings: B-C-CC-CL-CR-GL-GR-N-S-T-V



● **4529** Bronze 4.87 lb/ft  
Fittings: N



● **4538** Bronze 3.15 lb/ft  
Fittings: N  
16' lengths



● **4533** Bronze 3.66 lb/ft  
No fittings available  
16' lengths

Channel corner bends and channel lateral scrolls are available in bronze and malleable iron.

**Bronze Handrail Fittings**


Symbols and Letter Designations

When specifying a fitting, add fitting designation to handrail moulding number (e.g. **4530-V**). See pages 114-115 for available channel sizes.


BRONZE		
<b>B</b>		Bevel Lamb's Tongue
<b>C</b>		Corner Bend
<b>CC</b>		Channel Corner Bend
<b>CL</b>		Left Channel Lateral Scroll
<b>CR</b>		Right Channel Lateral Scroll
<b>D</b>		Domed End Cap
<b>E</b>		Terminal
<b>GL</b>		Left Lateral Scroll
<b>GR</b>		Right Lateral Scroll
<b>J</b>		Round Terminal
<b>L</b>		Corner Piece
<b>N</b>		Square End Piece
<b>S</b>		Straight Lamb's Tongue
<b>T</b>		Center Piece
<b>U</b>		End Urn Base
<b>V</b>		Volute
MALLEABLE IRON		
<b>CC</b>		Channel Corner Bend
<b>CL</b>		Left Channel Lateral Scroll
<b>CR</b>		Right Channel Lateral Scroll

● NICKEL-SILVER Alloy C79800, Mill Finish, 20' lengths, except as noted


Scale: 6" = 1'-0"




● **5530** Nickel-Silver 2.91 lb/ft  
Fittings: B-C-GL-GR-N-S-V  
16' lengths




● **5534** Nickel-Silver 2.52 lb/ft  
Fittings: B-C-GL-GR-N-S-V



● **5235** Nickel-Silver 3.16 lb/ft  
Fittings: B-C-GL-GR-N-S-V

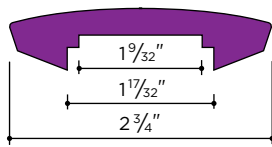


● **5274** Nickel-Silver 3.71 lb/ft  
Fittings: C-N

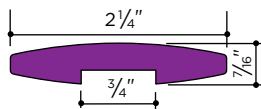


● **5572** Nickel-Silver 2.50 lb/ft  
Fittings: C-N


Channel corner bends and channel lateral scrolls are available in nickel-silver and malleable iron.

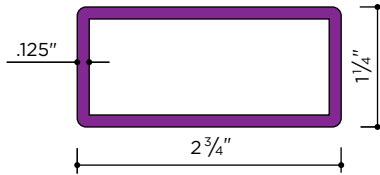


● **1334** Nickel-Silver 3.40 lb/ft  
Fittings: N (See page 81)  
16' lengths



● **5289** Nickel-Silver 1.75 lb/ft  
Fittings: N

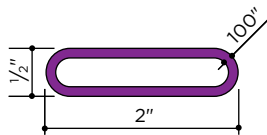

● **5288** Nickel-Silver 1.56 lb/ft  
Fittings: N

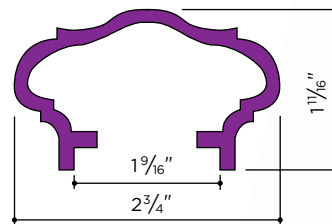

● **5538** Nickel-Silver 2.96 lb/ft  
Fittings: N

**Nickel-Silver Handrail Fittings**

Symbols and Letter Designations


When specifying a fitting, add fitting designation to handrail moulding number (e.g. **5534-V**). See pages 114 and 118 for available channel sizes.

NICKEL-SILVER

<b>B</b>		Bevel Lamb's Tongue
<b>C</b>		Corner Bend
<b>CC</b>		Channel Corner Bend
<b>CL</b>		Left Channel Lateral Scroll
<b>CR</b>		Right Channel Lateral Scroll
<b>E</b>		Terminal
<b>GL</b>		Left Lateral Scroll
<b>GR</b>		Right Lateral Scroll
<b>L</b>		Corner Piece
<b>N</b>		Square End Piece
<b>S</b>		Straight Lamb's Tongue
<b>V</b>		Volute

MALLEABLE IRON


<b>CC</b>		Channel Corner Bend
<b>CL</b>		Left Channel Lateral Scroll
<b>CR</b>		Right Channel Lateral Scroll

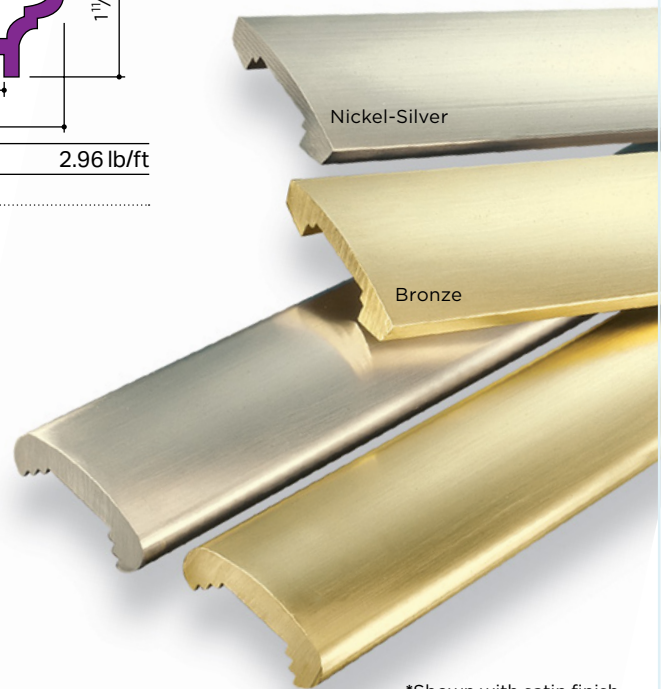


\*Shown with satin finish.

● STAINLESS Type 304 (18-8), 20' lengths, except as noted ● STEEL C1010, 20' lengths


Scale: 6" = 1'-0", except as noted




● **6503** Stainless 2.54 lb/ft  
No fittings available  
16' lengths




● **6513** Stainless 2.85 lb/ft  
Fittings: N




● **6512** Stainless 1.00 lb/ft  
Fittings: N




● **6502** Stainless 2.80 lb/ft  
No fittings available  
16' lengths



● **4488** Stainless .944 lb/ft  
Fittings: N Suitable for elevator cab handrails

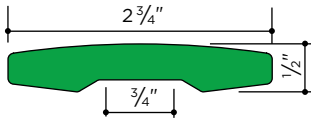


● **6501** Stainless 4.05 lb/ft  
No fittings available  
16' lengths




● **6511** Stainless 1.25 lb/ft  
Fittings: N

Steel mouldings are hot-rolled carbon steel, C1010. Fittings are cast in malleable iron, making them weldable and bendable.



**4429** used with 1" channel

● **4429** Prime Domestic Steel 1.50 lb/ft  
Fittings: B-C-CC-CL-CR-E-F-GL-GR-JL-JR-L-N-S-SL-SR-T-U-UC-UL-V




● **4416** Steel 3.15 lb/ft  
No fittings available


Loafer Rail



● **4445** Steel .688 lb/ft  
Loafer rail fits over pipe or flat surface to discourage lounging or skating on fences, planters, railings, or storefronts.




● **4428** Steel 2.25 lb/ft  
Fittings: B-C-CC-CL-CR-E-GL-GR-L-N-S-V




● **4441** Steel 2.14 lb/ft  
Fittings: B-C-CC-CL-CR-E-GL-GR-N-S-T-U-UC-V

Wall Flange



● **401\*** Steel  
\* Scale: 3" = 1'-0"



● **4435** Steel 2.65 lb/ft  
Fittings: V

**Stainless Steel Handrail Fittings**  
Symbols and Letter Designations

When specifying a fitting, add fitting designation to handrail moulding number (e.g. **4488-N**). See page 120 for available channel sizes.

STAINLESS	
C	Corner Bend
N	Square End Piece

**Steel Handrail Fittings**  
Symbols and Letter Designations


When specifying a fitting, add fitting designation to handrail moulding number (e.g. **4441-V**). See page 114 for available channel sizes.

MALLEABLE IRON	
B	Bevel Lamb's Tongue
C	Corner Bend
CC	Channel Corner Bend
CL	Left Channel Lateral Scroll
CR	Right Channel Lateral Scroll
E	Terminal
F	Forged Lamb's Tongue
GL	Left Lateral Scroll
GR	Right Lateral Scroll
JL	Left Junior Lateral Scroll
JR	Right Junior Lateral Scroll
L	Corner Piece
N	Square End Piece
S	Straight Lamb's Tongue
SL	Left Junior Lateral Channel
SR	Right Junior Lateral Channel
T	Center Piece
U	End Urn Base
UC	Center Urn Base
UL	Corner Urn Base
V	Volute


● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STAINLESS ● MALLEABLE IRON / STEEL

**HANDRAIL FITTINGS**


Satin finish, except as noted. Bronze and nickel-silver fittings are lacquered. See pages 40-42 for specific fittings availability.




**B** ζ Bevel Lamb's Tongue




**C** ⤴ Corner Bend  
Trim one leg for use as a wall return.  
Combine two corner bends together for 180° turns.

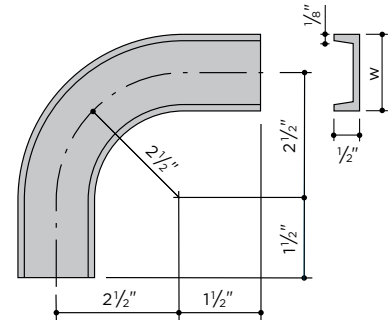


**CC** ⤴ Channel Corner Bend  
"As Cast" finish  
Fits the underside of moulding corner bend.

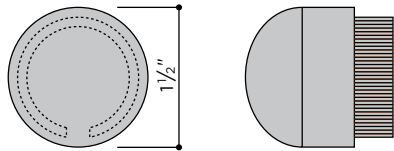


**D** ◐ Domed End Cap



**E** ◑ Terminal

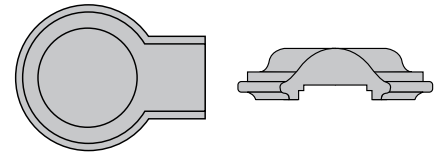


**J** ◐ Round Terminal

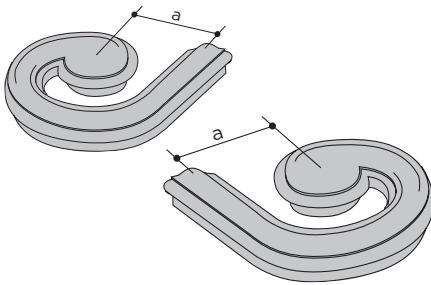


**MOULDING LATERAL SCROLLS**


Satin finish, except as noted. Moulding lateral scrolls may be bent to meet the pitch of stair railings. Cast channel and steel flat bar scrolls fit the underside of moulding lateral scrolls. They may be punched for round or square balusters. Malleable iron produced in "As Cast" finish.

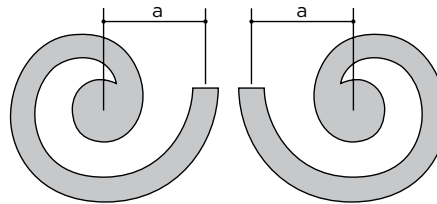


**GL** ◑ Left Lateral Scroll  
**GR** ◑ Right Lateral Scroll




**CL** ◑ Left Channel Lateral Scroll  
**CR** ◑ Right Channel Lateral Scroll  
Fits the underside of moulding lateral scroll.



**N\*\*** ◑ Square End Piece  
\*\* Stainless and steel with square front corners



**S** ζ Straight Lamb's Tongue



**V** ◑ Volute

TRADITIONAL RAILING COMPONENTS







Be aware that due to the differences in tolerances between extruded handrail and cast fittings, butt joints usually require special attention to ensure a proper match.

● ALUMINUM ● BRONZE ● MALLEABLE IRON

**FINIAL BASES, CENTER PIECES, CORNER PIECES, TERMINALS AND URN BASES**

Satin finish, except as noted. Bronze and nickel-silver fittings are lacquered. See page 53 for Urn and Ball Finials. Urn bases may be welded or bolted in place with the finial stud.





Be aware that due to the difference in tolerances between extruded handrail and cast fittings, butt joints usually require special attention to ensure a proper match.



**E** Terminal

**L** Corner Piece

**T** Center Piece

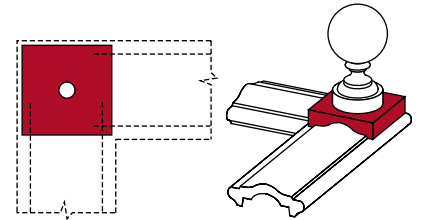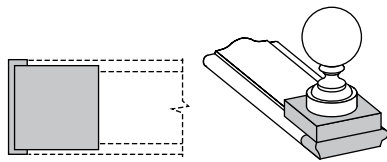

**U** End Urn Base


**UC** Center Urn Base

**UL** Corner Urn Base

**TERMINALS, CENTER PIECES & CORNER PIECE FITTING AVAILABILITY**


Handrail Moulding	Terminal End Piece (E)	Corner Piece (L)	Center Piece (T)	End Urn Base (U)	Handrail Moulding	Terminal End Piece (E)	Corner Piece (L)	Center Piece (T)	End Urn Base (U)
● 6929	● 6930E	● 6930L	● 6930T	-	● 4531	● 4531E	● 4531L	-	● 4531U
● 6930	● 6930E	● 6930L	● 6930T	-	● 4534	● 4534E	● 4534L	● 4534T	-
● 6931	● 6931E	● 6931L	● 6931T	-	● 4535	-	-	● 4535T	-
● 6934	● 6934E	● 6934L	● 6934T	-	● 4428	● 4428E	● 4428L	-	-
● 6935	● 6935E	-	● 6935T	-	● 4429	● 4429E	● 4429L	● 4429T	● 4429U
● 4530	● 4530E	● 4530L	● 4530T	-	● 4441	● 4441E	-	-	● 4441U

**HANDRAIL FITTINGS FOR USE WITH 4429**




**F** Forged Lamb's Tongue

	a
● 4429F Steel	18"
● 4429F-3 Steel	36"
● 4429F-4 Steel	48"
● 4429F-5 Steel	60"
● 4429F-6 Steel	72"

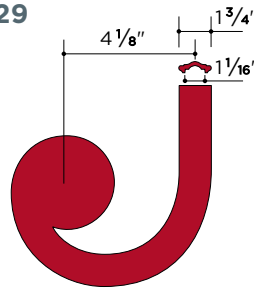

**Lateral Scroll**

<b>SL</b> Left Junior Lateral Scroll	
<b>SR</b> Right Junior Lateral Scroll	
● 4429SL	Malleable Iron
● 4429SR	Malleable Iron

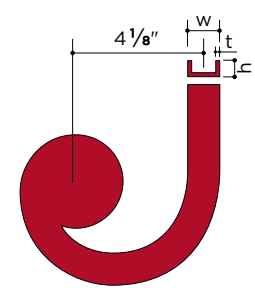


**Lateral Channel**

	w	h	t	
● 100JL	Malleable Iron	1"	1/2"	1/8"
● 100JR	Malleable Iron	1"	1/2"	1/8"

● ALUMINUM ● BRONZE ● NICKEL-SILVER ● MALLEABLE IRON

CORNER BEND RADIUS




Corner Bend (C)	Bend Radius(r)
● 6435C Aluminum	3"
● 6530C Aluminum	4"
● 6531C Aluminum	4"
● 6532C Aluminum	4"
● 6901C Aluminum	2 1/2"
● 6902C Aluminum	2 1/2"

Corner Bend (C)	Bend Radius(r)
● 6905C Aluminum	3"
● 6906C Aluminum	3"
● 6907C Aluminum	3"
● 6930C Aluminum	2 1/2"
● 6931C Aluminum	2 1/2"
● 6932C Aluminum	3"
● 6933C Aluminum	2 1/2"
● 6934C Aluminum	2 1/2"
● 6935C Aluminum	2 1/2"
● 6984C Aluminum	3"
● 6985C Aluminum	2 1/2"
● 6987C Aluminum	3"
● 4530C Bronze	2 1/2"
● 4531C Bronze	2 1/2"
● 4534C Bronze	2 1/2"

Corner Bend (C)	Bend Radius(r)
● 4535C Bronze	2 1/2"
● 4539C Bronze	2 1/2"
● 4572C Bronze	2 1/2"
● 4573C Bronze	3"
● 4574C Bronze	3"
● 4575C Bronze	2 1/2"
● 6489C Bronze	5"
● 5235C Nickel-Silver	2 1/2"
● 5274C Nickel-Silver	3"
● 5530C Nickel-Silver	2 1/2"
● 5534C Nickel-Silver	2 1/2"
● 5572C Nickel-Silver	2 1/2"
● 4428C* Malleable Iron	2 1/2"
● 4429C* Malleable Iron	2 1/2"
● 4441C* Malleable Iron	2 1/2"


\* "As cast" finish, no lacquer

CHANNEL CORNER BEND DIMENSIONS

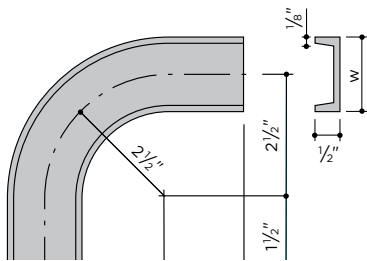


Channel Corner Bend (CC)	w
● 600CC Aluminum	1"
● 615CC Aluminum	1 1/4"
● 650CC Aluminum	1 1/2"
● 400CC Bronze	1"
● 425CC Bronze	1 1/4"
● 450CC Bronze	1 1/2"
● 1315CC Nickel-Silver	1 1/4"
● 1350CC Nickel-Silver	1 1/2"
● 100CC Malleable Iron	1"
● 125CC Malleable Iron	1 1/4"
● 150CC Malleable Iron	1 1/2"

CHANNEL LATERAL SCROLL DIMENSIONS



Channel Lateral Scroll (CL/CR)	Lateral "a"	w
● 600CL/CR Aluminum	5 9/16"	1"
● 615CL/CR Aluminum	5 1/2"	1 1/4"
● 650CL/CR Aluminum	6 3/8"	1 1/2"
● 400CL/CR Bronze	5 9/16"	1"
● 425CL/CR Bronze	5 1/2"	1 1/4"
● 450CL/CR Bronze	6 3/8"	1 1/2"
● 1315CL/CR Nickel-Silver	5 1/2"	1 1/4"
● 1350CL/CR Nickel-Silver	6 3/8"	1 1/2"
● 100CL/CR Malleable Iron	5 9/16"	1"
● 125CL/CR Malleable Iron	5 1/2"	1 1/4"
● 150CL/CR Malleable Iron	6 3/8"	1 1/2"

LATERAL SCROLL DIMENSION

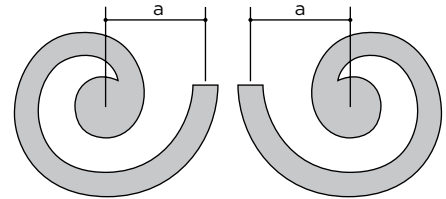

Lateral Scroll (GL/GR)	Lateral "a" Dimension
● 6930GL/GR Aluminum	6 3/8"
● 6931GL/GR Aluminum	5 9/16"
● 6933GL/GR Aluminum	5 1/2"
● 6934GL/GR Aluminum	5 1/2"
● 6935GL/GR Aluminum	6 3/8"
● 4530GL/GR Bronze	6 3/8"
● 4531GL/GR Bronze	5 9/16"
● 4534GL/GR Bronze	5 1/2"
● 4535GL/GR Bronze	6 3/8"
● 4539GL/GR Bronze	5 1/2"
● 5235GL/GR Nickel-Silver	6 3/8"
● 5530GL/GR Nickel-Silver	6 3/8"
● 5534GL/GR Nickel-Silver	5 1/2"
● 4428GL/GR Malleable Iron	5 1/2"
● 4429GL/GR Malleable Iron	5 5/8"
● 4441GL/GR Malleable Iron	6 1/8"

\* Verify all dimensions before cutting.

TRADITIONAL RAILING COMPONENTS

## HANDRAIL FITTINGS AVAILABILITY

● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STAINLESS ● MALLEABLE IRON

Handrail Moulding	Corner Bend (C)	Non-Ferrous Corner Bend *	Iron Corner Bend *
● 6402 Aluminum	● 6902C Aluminum	-	-
● 6405 Aluminum	● 6985C Aluminum	-	-
● 6407 Aluminum	● 6907C Aluminum	-	-
● 6434 Aluminum	● 6434C Aluminum	-	-
● 6435 Aluminum	● 6435C Aluminum	-	-
● 6436 Aluminum	-	-	-
● 6437 Aluminum	-	-	-
● 6530 Aluminum	● 6530C Aluminum	-	-
● 6531 Aluminum	● 6531C Aluminum	-	-
● 6532 Aluminum	● 6532C Aluminum	-	-
● 6901 Aluminum	● 6901C Aluminum	● 600CC Aluminum	● 100CC Malleable Iron
● 6902 Aluminum	● 6902C Aluminum	● 600CC Aluminum	● 100CC Malleable Iron
● 6905 Aluminum	● 6905C Aluminum	-	-
● 6906 Aluminum	● 6906C Aluminum	-	-
● 6907 Aluminum	● 6907C Aluminum	-	-
● 6929 Aluminum	● 6930C Aluminum	● 650CC Aluminum	● 150CC Malleable Iron
● 6930 Aluminum	● 6930C Aluminum	● 650CC Aluminum	● 150CC Malleable Iron
● 6931 Aluminum	● 6931C Aluminum	● 600CC Aluminum	● 100CC Malleable Iron
● 6932 Aluminum	● 6932C Aluminum	-	-
● 6933 Aluminum	● 6933C Aluminum	● 615CC Aluminum	● 125CC Malleable Iron
● 6934 Aluminum	● 6934C Aluminum	● 615CC Aluminum	● 125CC Malleable Iron
● 6935 Aluminum	● 6935C Aluminum	● 650CC Aluminum	● 150CC Malleable Iron
● 6984 Aluminum	● 6984C Aluminum	-	-
● 6985 Aluminum	● 6985C Aluminum	● 650CC Aluminum	● 150CC Malleable Iron
● 6987 Aluminum	● 6987C Aluminum	-	-
● 4529 Bronze	-	-	-
● 4530 Bronze	● 4530C Bronze	● 450CC Bronze	● 150CC Malleable Iron
● 4531 Bronze	● 4531C Bronze	● 400CC Bronze	● 100CC Malleable Iron
● 4534 Bronze	● 4534C Bronze	● 425CC Bronze	● 125CC Malleable Iron
● 4535 Bronze	● 4535C Bronze	● 450CC Bronze	● 150CC Malleable Iron
● 4538 Bronze	-	-	-
● 4539 Bronze	● 4539C Bronze	● 425CC Bronze	● 125CC Malleable Iron
● 4572 Bronze	● 4572C Bronze	-	-
● 4573 Bronze	● 4573C Bronze	-	-
● 4574 Bronze	● 4574C Bronze	-	-
● 4575 Bronze	● 4575C Bronze	● 450CC Bronze	● 150CC Malleable Iron
● 6488 Bronze	-	-	-
● 6489 Bronze	● 6489C Bronze	-	-
● 5235 Nickel-Silver	● 5235C Nickel-Silver	● 1350CC Nickel-Silver	● 150CC Malleable Iron
● 5274 Nickel-Silver	● 5274C Nickel-Silver	-	-
● 5288 Nickel-Silver	-	-	-
● 5289 Nickel-Silver	-	-	-
● 5530 Nickel-Silver	● 5530C Nickel-Silver	● 1350CC Nickel-Silver	● 150CC Malleable Iron
● 5534 Nickel-Silver	● 5534C Nickel-Silver	● 1315CC Nickel-Silver	● 125CC Malleable Iron
● 5538 Nickel-Silver	-	-	-
● 5572 Nickel-Silver	● 5572C Nickel-Silver	-	-
● 4428 Steel	● 4428C* Malleable Iron	-	● 125CC Malleable Iron
● 4429 Steel	● 4429C* Malleable Iron	-	● 100CC Malleable Iron
● 4441 Steel	● 4441C* Malleable Iron	-	● 150CC Malleable Iron
● 4488 Stainless	-	-	-
● 6511 Stainless	-	-	-
● 6512 Stainless	-	-	-

\* "As cast" finish, no lacquer

Be aware that due to the differences in tolerances between extruded handrail and cast fittings, butt joints usually require special attention to ensure a proper match.



POSTS  
SPINDLES  
COLLARS  
BASES


Private Residence, Newport, RI, Cordtsen Design Architecture, Middletown, RI, Tampa, FL (Architect/Designer), Salmon Studios, Florence, MA (Designer/Fabricator), Parker Construction, East Providence, RI (General Contractor).

STARTING POSTS

● ALUMINUM ● BRONZE ● NICKEL-SILVER ● MALLEABLE IRON/STEEL ● STAINLESS


Starting Posts from Julius Blum & Co., Inc. have been engineered and tested to conform to the ASTM E985 concentrated test load requirement. Copies of the Test Reports are available. Scale: 1" = 1'-0" Available bases, flanges and collars on pages 50-52.

40"

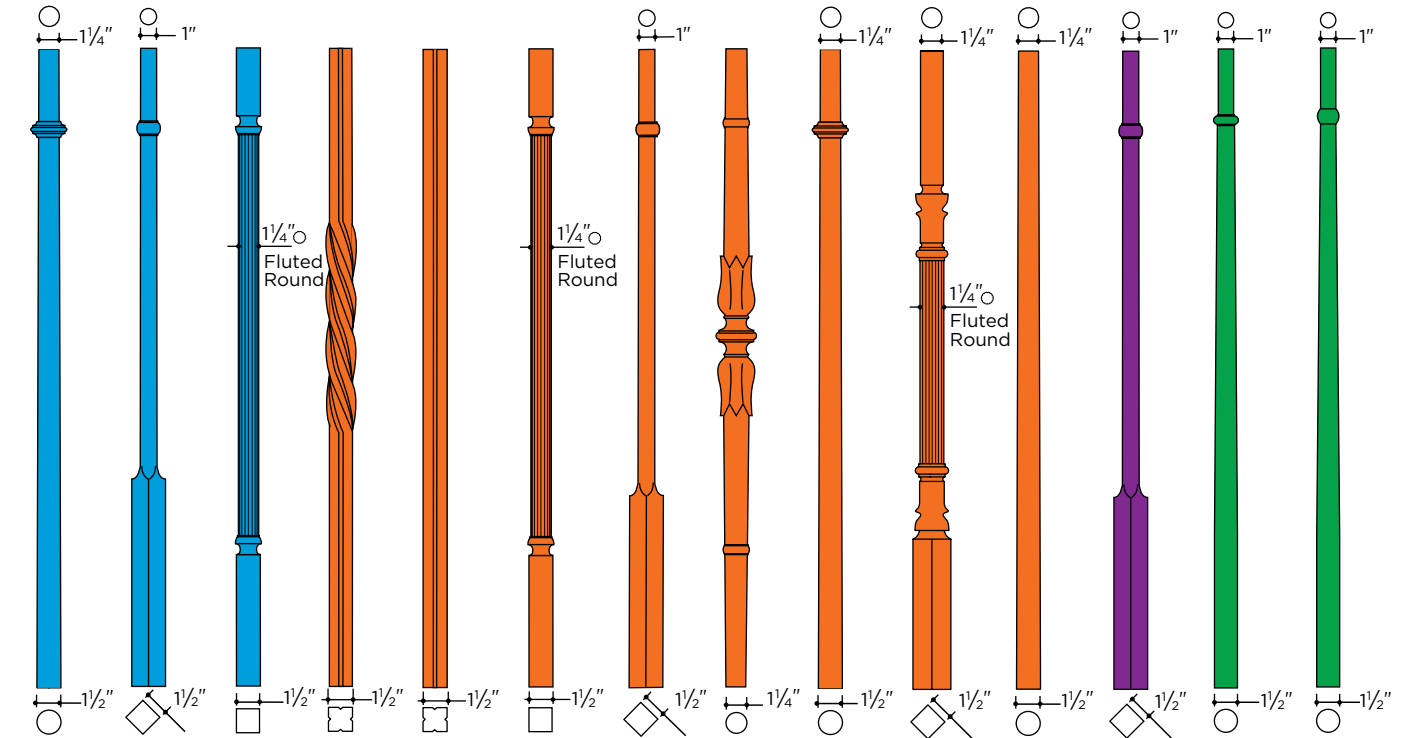

- 703 Aluminum
- 731L Aluminum
- 709 Aluminum
- 143L Forged Bronze
- 142L Bronze
- 209 Bronze
- 131 Bronze
- 134 Bronze
- 157 Bronze
- 135 Bronze
- 136 Bronze
- 132 Nickel-Silver
- 686 Stainless
- 687 Stainless

40"

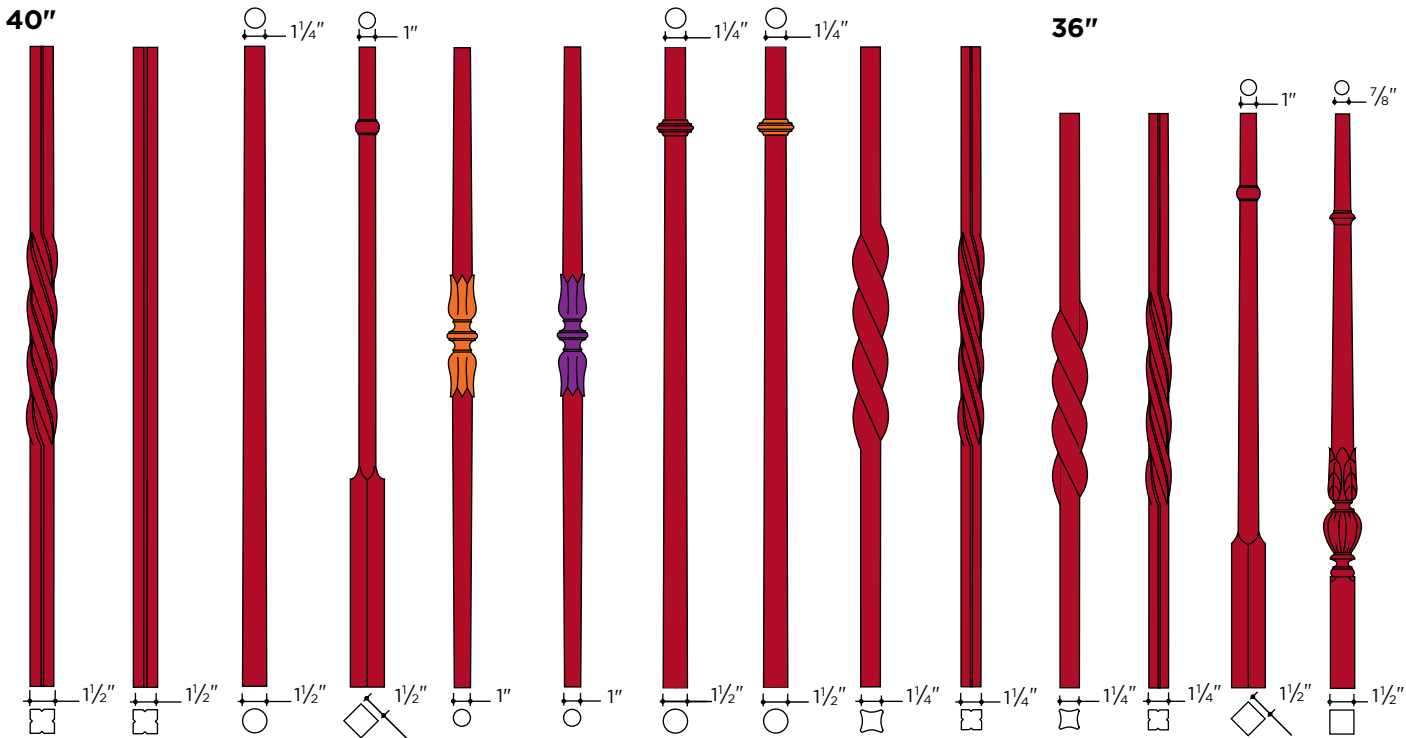

- 347L Forged Steel
- 345L Forged Steel
- 326L Forged Steel
- 331L Forged Steel
- 340 Steel w/ Bronze Center
- 341 Steel w/ Nickel-Silver Center
- 155 Forged Steel
- 156 Forged Steel w/ Bronze
- 332L Forged Steel
- 343L Forged Steel
- 332 Forged Steel
- 343 Forged Steel
- 331 Forged Steel
- 333 Malleable Iron

● BRONZE ● NICKEL-SILVER ● STEEL




Municipal Building, AGAR Welding, Walnut Bottom, PA (Fabricator), Lobar, Inc., Dillsburg, PA (General Contractor).

TRADITIONAL RAILING COMPONENTS

**Bronze and Nickel-Silver Center Detail**


Forged steel spindles with decorative centers are forged in two halves with one end turned down to 1/2" diameter solid rod. This rod is force-fit into a recess drilled in the other half of the spindle forming a permanent assembly with a full 1/2" of solid steel at the center, thereby overcoming the weakness of an assembly using a threaded stud.

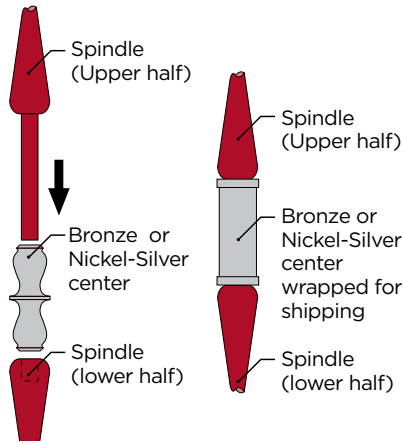

**TRADITIONAL POST LOWER COVER**




● 887 Bronze



Spindle Cups are machined from solid stock. Bronze and nickel-silver cups are furnished in a satin finish and laquered. Steel cups are furnished in a black oxide machined finish suitable for painting. Spindle cups are not intended or designed to be a structural member.

**RINGED SPINDLE CUP**


Rounded Hole

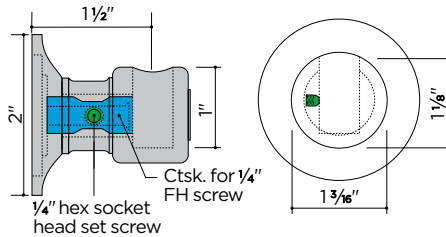

		Hole
● 884	Bronze	1/2"
● 184	Nickel-Silver	1/2"
● 1984	Steel	1/2"


**PLAIN SPINDLE CUP**

Rounded Hole

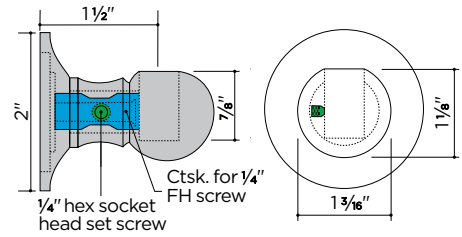

		Hole
● 883	Bronze	1/2"
● 183	Nickel-Silver	1/2"
● 1983	Steel	1/2"

**TRADITIONAL POST FASCIA FLANGE**

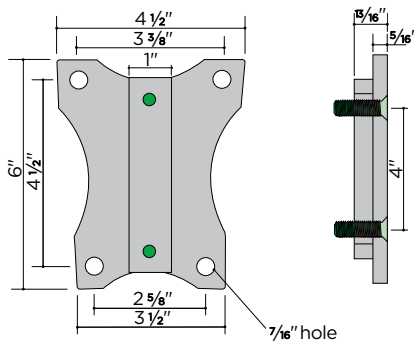

● 888	Bronze
● 198	Nickel-Silver
● 1988	Steel

184




883



**DECORATIVE HEX HEAD LAG SCREW**

For mounting fascia flange



● Brass	Finished Head	3/8" x 2"
● Nickel-Silver	Finished Head	3/8" x 2"

SPINDLES

● ALUMINUM ● BRONZE ● NICKEL-SILVER ● MALLEABLE IRON / STEEL

Spindles are produced from solid stock and have a surface suitable for polishing or painting. Forged spindles with bronze and nickel-silver centers are permanently assembled and are equal in strength to solid spindles. Bronze and nickel-silver centers are polished and protected for shipment and installation. Aluminum spindles are machined from solid 6063 aluminum rod and have a surface suitable for painting or anodizing. Important: spindles are not structural members nor intended to be starting posts. Available bases, flanges and collars on pages 50-52.

42" Scale: 1" = 1'-0"



● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STAINLESS ● MALLEABLE IRON / STEEL

42" Scale: 1" = 1'-0"




● 123L ● 124L ● 23L ● 24L ● 334L ● 336L ● 337L ● 338L ● 339L ● 328L ● 328DL

Forged Steel w/ Bronze    Forged Steel w/ Bronze    Forged Steel w/ Nickel-Silver    Forged Steel w/ Nickel-Silver    Malleable Iron    Forged Steel w/ Nickel-Silver    Forged Steel w/ Bronze    Forged Steel w/ Bronze    Forged Steel w/ Bronze    Forged Steel    Forged Steel

42" Scale: 1" = 1'-0"

40" Scale: 1" = 1'-0"

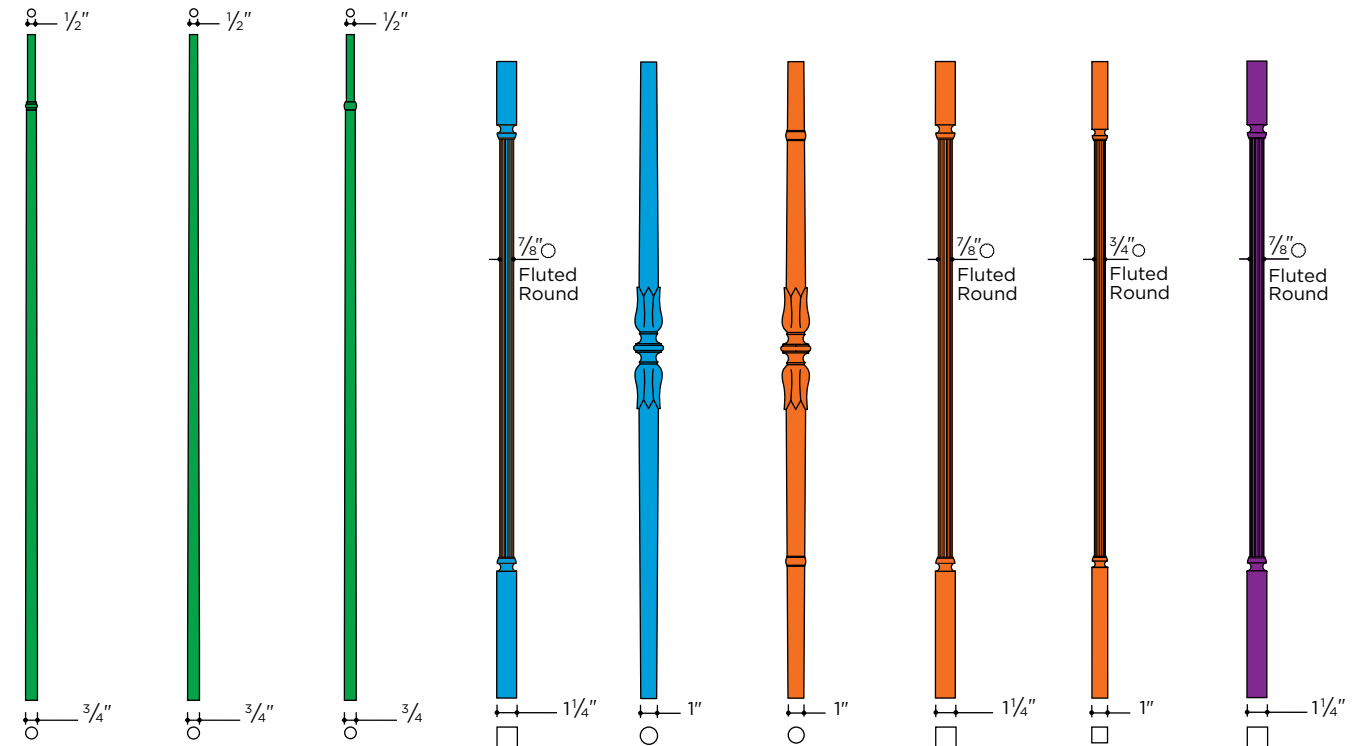


● 682L ● 683L ● 684L ● 735 ● 740 ● 234 ● 235 ● 239 ● 236

Stainless    Stainless    Stainless    Aluminum    Aluminum    Bronze    Bronze    Bronze    Nickel-Silver


● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STEEL

36" Scale: 1" = 1'-0"

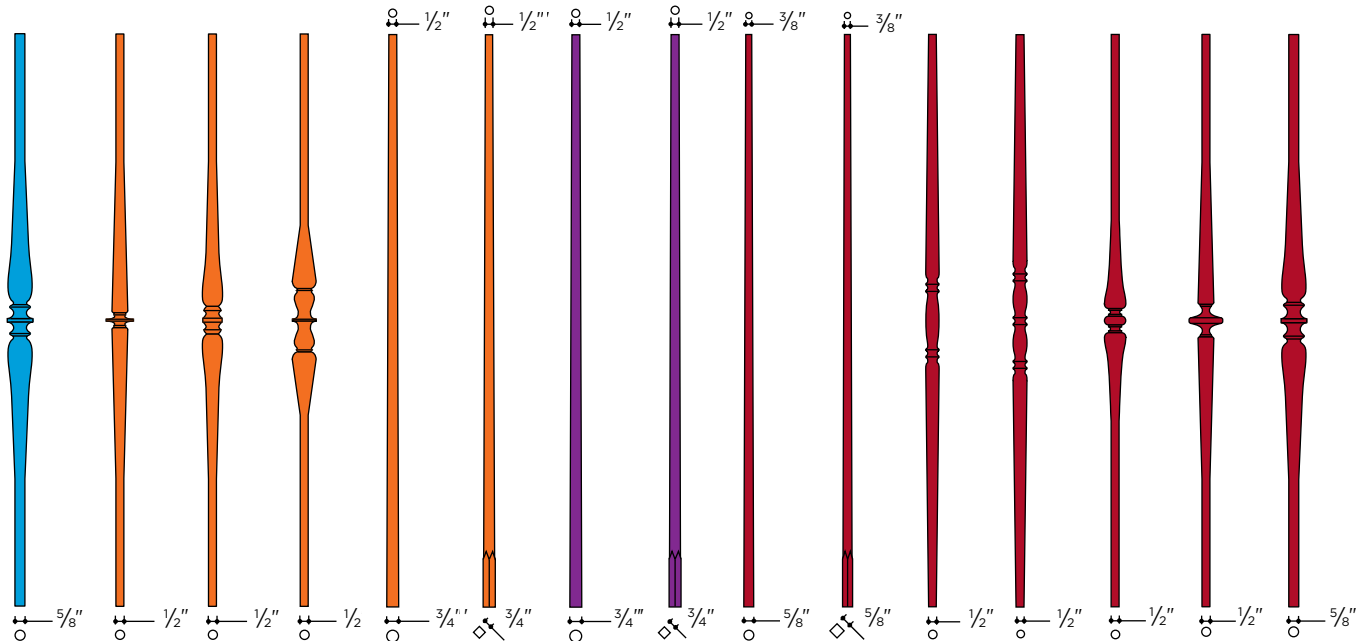

- 718 Aluminum
- 137 Bronze
- 138 Bronze
- 139 Bronze
- 129 Bronze
- 130 Bronze
- 29 Nickel-Silver
- 30 Nickel-Silver
- 329 Steel
- 330 Steel
- 323 Forged Steel
- 324 Forged Steel
- 325 Forged Steel
- 327 Forged Steel
- 328 Forged Steel


36" Scale: 1" = 1'-0"

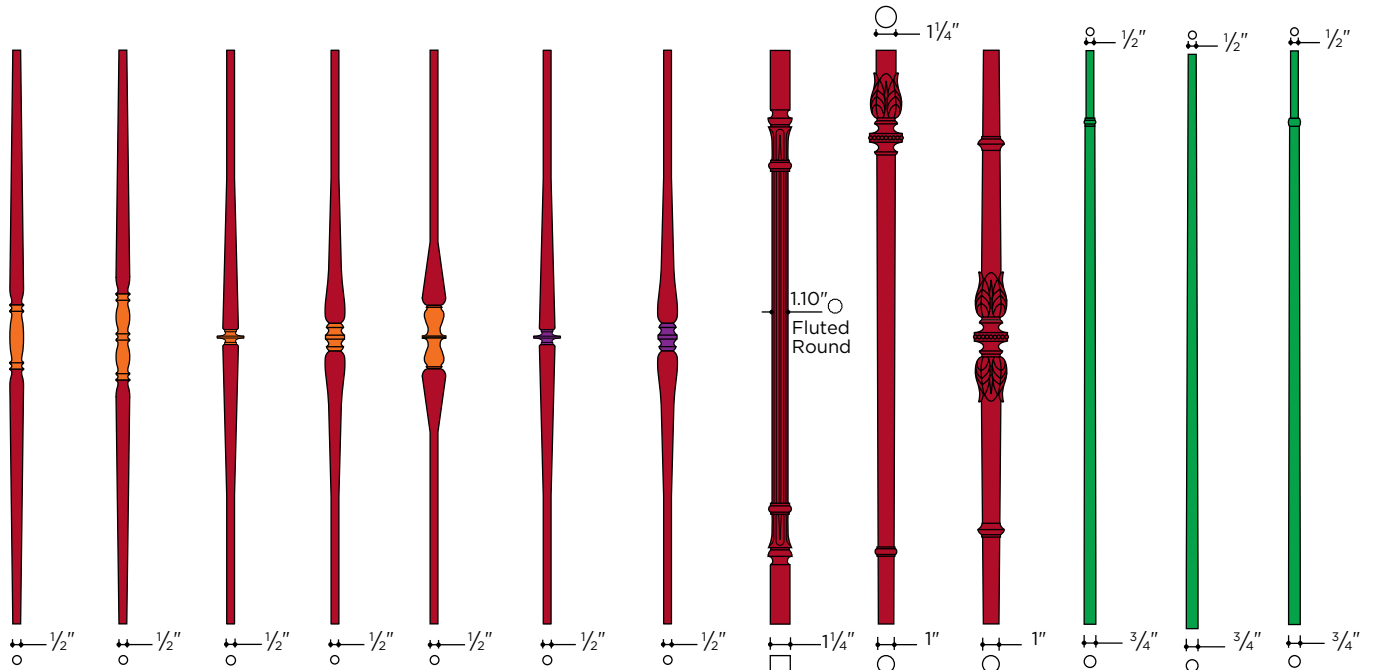

- 123 Forged Steel w/ Bronze
- 124 Forged Steel w/ Bronze
- 337 Forged Steel w/ Bronze
- 338 Forged Steel w/ Bronze
- 339 Forged Steel w/ Bronze
- 336 Forged Steel w/ Nickel-Silver
- 358 Forged Steel w/ Nickel-Silver
- 335 Malleable Iron
- 154 Malleable Iron
- 334 Malleable Iron
- 682 Stainless
- 683 Stainless
- 684 Stainless


● ALUMINUM ● MALLEABLE IRON

36" Scale: 1" = 1'-0"

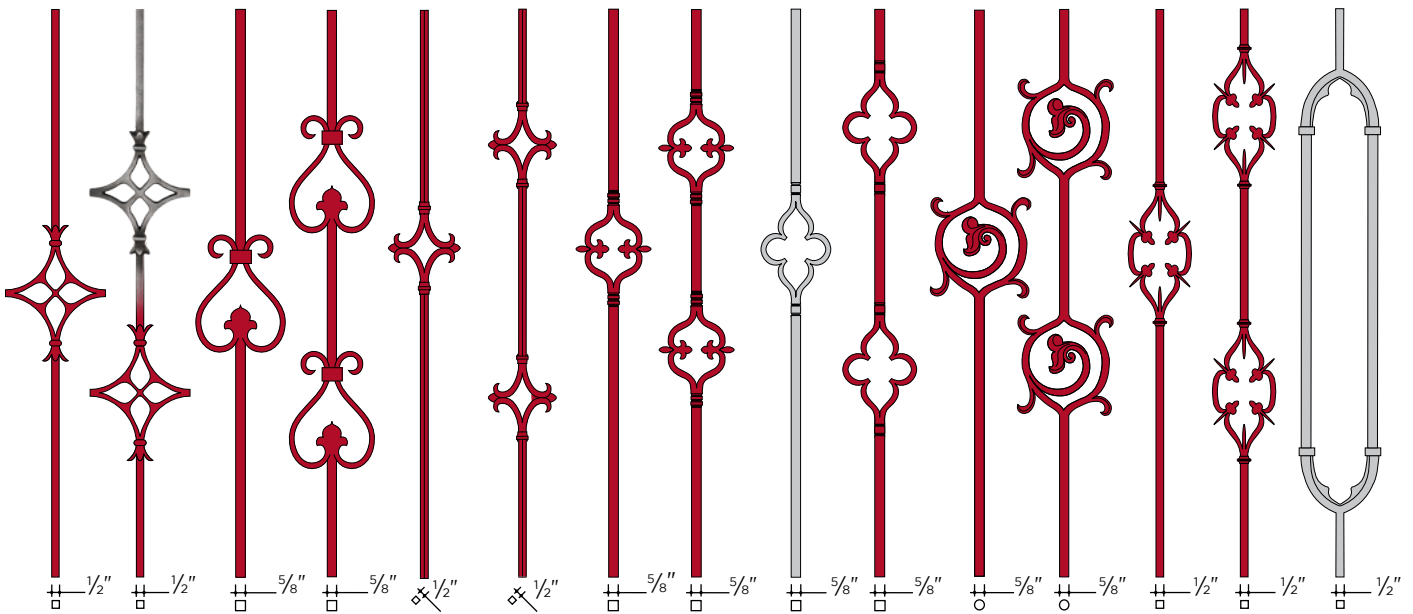

- 528 Malleable Iron 1/2"
- 158\*\* Malleable Iron 1/2"
- 529 Malleable Iron 5/8"
- 159 Malleable Iron 5/8"
- 534 Malleable Iron 1/2"
- 153 Malleable Iron 1/2"
- 530 Malleable Iron 5/8"
- 530D Malleable Iron 5/8"
- 531 Malleable Iron 5/8"
- 531D Malleable Iron 5/8"
- 532 Malleable Iron 5/8"
- 532D Malleable Iron 5/8"
- 533 Malleable Iron 1/2"
- 533D Malleable Iron 1/2"
- 973\* Malleable Iron 1/2"
- 1531 Aluminum 5/8"
- 1973\* Aluminum 1/2"

TRADITIONAL RAILING COMPONENTS

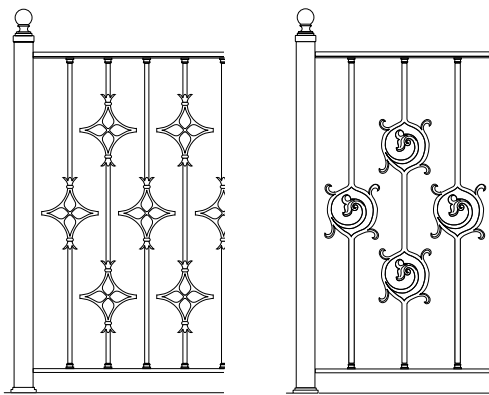

\*Conforms to 4" sphere requirement  
\*\*Color removed to show detail

Spindle		Width at widest point
● 1973*	Aluminum	5 1/4"
● 1531	Aluminum	4 3/4"
● 531	Malleable Iron	4 3/4"
● 531D	Malleable Iron	4 3/4"
● 533	Malleable Iron	5"
● 533D	Malleable Iron	5"
● 973*	Malleable Iron	5 1/4"
● 529	Malleable Iron	5 5/8"
● 530	Malleable Iron	5 5/8"


Spindle		Width at widest point
● 530D	Malleable Iron	5 7/8"
● 153	Malleable Iron	6"
● 159	Malleable Iron	6"
● 534	Malleable Iron	6"
● 532	Malleable Iron	6 7/16"
● 532D	Malleable Iron	6 7/16"
● 528	Malleable Iron	7"
● 158	Malleable Iron	7"

\*Intermediate bar may be required to meet code requirements


**ORNAMENTAL VALANCES**

Scale: 1 1/2" = 1'-0"


These castings are useful in various combinations to create ornamental railings with minimal openings. When used with 1/2" square bars, the maximum opening will be 3 3/4", thereby conforming to the 4" sphere requirement.



	lbs	ht	wd
● 1970 Aluminum	1.2	4 5/8"	17"
● 970 Malleable Iron	3.4	4 5/8"	17"



	lbs	ht	wd
● 1971 Aluminum	.8	3"	17"
● 971 Malleable Iron	2.2	3"	17"




	lbs	ht	wd
● 1972 Aluminum	1.1	5"	17"
● 972 Malleable Iron	3.3	5"	17"

● ALUMINUM ● BRONZE ● NICKEL-SILVER ● MALLEABLE IRON / STEEL


Bases, collars and flanges are furnished with clear holes for bar sizes shown. Non-ferrous (aluminum, bronze, nickel-silver) items are machined to match extruded sections and are satin finished, except as noted. Polished bronze and nickel-silver components are lacquered. Ferrous items are cast in malleable iron.

**BASES**

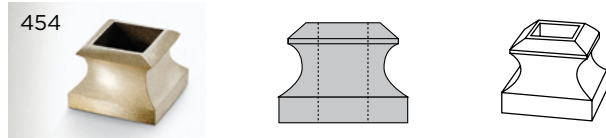


Square Hole

Aluminum	Bronze	Nickel-Silver	Hole	Width	Height
● 752	● 252	● 452	1/2"	1 1/4"	15/16"
● 753	● 253		5/8"	1 1/4"	15/16"
● 754	● 254	● 454	3/4"	1 3/8"	15/16"
● 767	● 267	● 467	1"	1 9/16"	1 1/16"
● 768	● 268	● 448	1 1/4"	2 3/4"	1 1/2"
● 769	● 269	● 479	1 1/2"	3"	1 1/2"

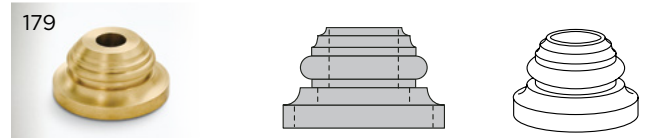


Round Hole

Bronze	Turned Steel	Hole	Width	Height
● 182	● 486	3/8"	1 1/2"	1"
● 181	● 485	1/2"	1 1/2"	1"
● 180	● 484	5/8"	1 7/8"	1 1/4"
● 179	● 483	3/4"	3"	1 1/2"
● 178	● 482	1"	3"	1 1/2"
● 177	● 481	1 1/4"	3 1/2"	2 1/8"
● 346	● 300	1 1/2"	3 1/2"	2 1/8"




Square Hole

		Hole	Width	Height
● 352	Malleable Iron	1/2"	1 1/4"	1 1/16"
● 353	Malleable Iron	5/8"	1 1/4"	1 1/16"
● 354	Malleable Iron	3/4"	1 3/8"	1 1/16"
● 367	Malleable Iron	1"	1 3/4"	1 1/8"
● 368	Malleable Iron	1 1/4"	2 3/4"	1 5/8"
● 369	Malleable Iron	1 1/2"	3"	1 3/4"




Round Hole

		Hole	Width	Height
● 80	Turned Brass—unpolished	1/2"	1 1/4"	3/4"
● 480	Nickel-Silver	1/2"	1 1/4"	3/4"
● 77	Turned Steel	1/2"	1 1/4"	3/4"
● 75	Turned Steel	3/8"	1 1/4"	3/4"

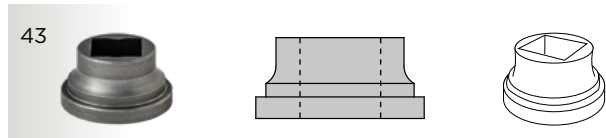


Square Hole

		Hole	Width	Height
● 39	Aluminum	3/4"	1 9/16"	3/4"
● 47	Bronze	3/4"	1 9/16"	3/4"
● 51	Nickel-Silver	3/4"	1 9/16"	3/4"
● 43	Steel	5/8"	1 7/16"	3/4"

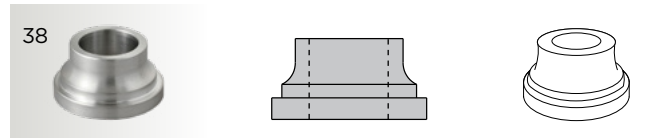


Round Hole

		Hole	Width	Height
● 38	Aluminum	3/4"	1 7/16"	3/4"
● 44	Bronze	3/4"	1 7/16"	3/4"
● 48	Nickel-Silver	3/4"	1 7/16"	3/4"
● 40	Steel	5/8"	1 1/4"	3/4"

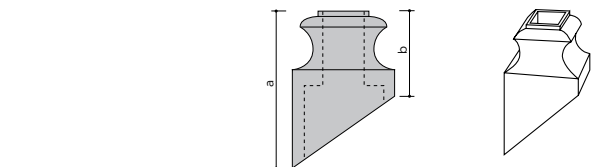

Square Hole

		Hole	a	b	Width
● 362	Malleable Iron	1/2"	2"	1"	1 1/4"
● 363	Malleable Iron	5/8"	2 1/4"	1"	1 1/4"
● 262	Bronze	1/2"	2"	1"	1 1/4"
● 263	Bronze	5/8"	2 1/4"	1"	1 1/4"

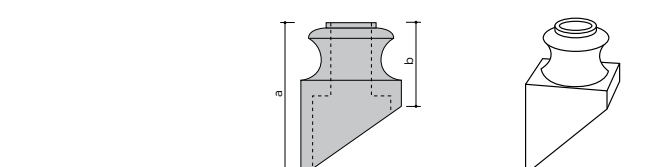

Round Hole

		Hole	a	b	Width
● 359	Malleable Iron	3/8"	1 7/8"	1"	1 1/4"
● 360	Malleable Iron	1/2"	1 7/8"	1"	1 1/4"
● 361	Malleable Iron	5/8"	2 3/16"	1 1/8"	1 3/8"
● 260	Bronze	1/2"	1 7/8"	1"	1 1/4"
● 261	Bronze	5/8"	2 3/16"	1 1/8"	1 3/8"
● 461	Nickel-Silver	5/8"	2 3/16"	1 1/8"	1 1/2"


Round Hole

		Hole	Height
● 264	Bronze	1"	2 5/8"
● 434	Nickel-Silver	1"	2 5/8"

Matches center of 234, 340, and 341 post

● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STAINLESS ● MALLEABLE IRON/STEEL


BASES



Round Hole

Aluminum	Bronze	Nickel-Silver	Malleable Iron	Hole	Width	Height
	● 255		● 355	3/8"	1 1/4"	15/16"
	● 256	● 456	● 356	1/2"	1 1/4"	15/16"
● 717	● 257		● 357	5/8"	1 3/8"	1 1/8"
		● 457		5/8"	1 1/2"	1 1/8"
● 760	● 250	● 455		3/4"	2 1/2"	15/8"
● 719	● 249	● 449	● 349	1"	2 1/2"	15/8"
	● 251			1 1/4"	2 1/2"	15/8"

TUBE SOCKETS



Square Hole

Mal. Iron	Aluminum	Hole	Base	Height
● 201	● 1201	1"	3"	1 3/8"
● 202	● 1202	1 1/4"	3 1/4"	1 1/2"
● 203	● 1203	1 1/2"	3 1/2"	1 3/4"
● 204	● 1204	2"	4"	1 3/4"
● 205	● 1205	2 1/2"	4 1/2"	1 7/8"
● 206	● 1206	3"	5 1/4"	2 3/8"

TRADITIONAL RAILING COMPONENTS

FLANGES



Square Hole

		Hole	Base	Height
● 342	Malleable Iron	7/16"	1 1/8"	1 1/8"
● 344*	Malleable Iron	1/2"	1 1/8"	1 1/8"
● 350*	Malleable Iron	1/2"	1 1/8"	1 3/16"
● 351	Malleable Iron	5/8"	1 3/16"	1 3/16"
● 398	Malleable Iron	3/4"	1 7/16"	7/8"
● 400	Malleable Iron	7/8"	1 5/8"	1"
● 399	Malleable Iron	1"	1 3/4"	1 1/8"

\* 344 is similar to 350 but is high enough to permit adjustment of baluster height for uneven steps

Round Hole

Bronze	Turned Steel	Hole	Width	Height
● 147	● 347	1 1/2"	2 1/4"	3/4"



Round Hole

	Hole	Width	Height
● 690 Stainless	1 1/2"	3 1/4"	2 7/16"

Round Hole

	Hole	Width	Height
● 694 Stainless	3/4"	2"	1 1/2"



Round Hole

	Hole	Width	Height
● 691 Stainless	1 1/2"	3 1/4"	1 13/16"



Round Hole

	Hole	Width	Height
● 695 Stainless	3/4"	2"	1 13/16"

Square Hole

Mal. Iron	Hole	Base	Height
● 390	1/2"	1 5/16"	1"
● 391	5/8"	1 5/16"	1"
● 393	1"	1 13/16"	1 3/16"



Round Hole

Mal. Iron	Aluminum	Bronze	Hole	Base	Height
● 395			3/8"	1 5/16"	1"
● 396	● 776	● 276	1/2"	1 5/16"	1"
● 397	● 797	● 297	5/8"	1 7/16"	1 1/8"


● ALUMINUM ● BRONZE ● NICKEL-SILVER ● MALLEABLE IRON/STEEL



Oyler School, Cincinnati, OH, Bluegrass Iron Works, Ludlow, KY (Fabricator), Steve Hollingsworth, KY (Designer).





282



Round Hole

		Hole	Width	Height
● 281	Bronze	1/2"	1 1/4"	1 3/4"
● 282	Bronze	5/8"	1 1/4"	1 3/4"
● 406	Nickel-Silver	5/8"	1 1/4"	1 3/4"



Round Hole




		Hole	Width	Height
● 310	Bronze	1/2"	1 1/2"	2"
● 311	Bronze	5/8"	1 1/2"	2"

COLLARS

Bronze, nickel silver and steel collars can be used to add decoration to square or round bar. Bronze and nickel-silver collars are polished and clear lacquered.



366




Square Hole

Aluminum	Bronze	Hole	Width	Height
● 765	● 265	1/2"	1 3/8"	1 3/4"
● 766	● 266	5/8"	1 3/8"	1 3/4"


Square Hole

		Hole	Width	Height
● 365	Malleable Iron	1/2"	1 9/16"	2"
● 366	Malleable Iron	5/8"	1 11/16"	1 7/8"
● 348	Malleable Iron	3/4"	1 15/16"	2"
● 866	Bronze	5/8"	1 11/16"	1 7/8"



Round Hole, Turned

Steel	Bronze	Nickel-Silver	Hole OD	Height	
● 72	● 272	● 472	1/2"	1"	9/16"
● 273	● 473		1"	1 1/4"	3/4"



Round Hole, Turned


Steel	Bronze	Nickel-Silver	Hole OD	Height	
● 73	● 872		3/8"	3/4"	13/32"
● 74	● 274	● 474	5/8"	1"	1/2"

● ALUMINUM ● BRONZE ● NICKEL-SILVER ● MALLEABLE IRON / STEEL



Oyler School, Cincinnati, OH, Bluegrass Iron Works, Ludlow, KY (Fabricator), Steve Hollingsworth, KY (Designer).

TRADITIONAL RAILING COMPONENTS

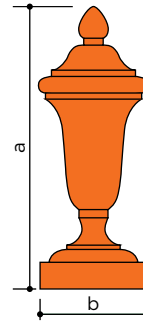


Square Base		a	b
● 3134	Bronze	4"	1 1/2"
● 3133	Bronze	3"	1"

Round Base		a	b
● 3034	Bronze	4"	1 1/2"
● 3033	Bronze	3"	1"


URN AND BALL FINIALS

Bronze, nickel-silver and aluminum urns and finials are satin-finished. Bronze and nickel-silver items are clear lacquered. All urns and finials are supplied with a 3/8" tapped hole in the base. Finial and urn bases, see page 40.

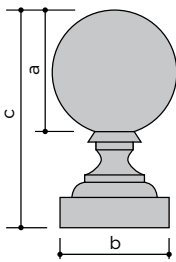


Square Base				
	a	b	c	
● 3145	Bronze	2"	1 3/4"	3 1/2"
● 3144	Bronze	1 3/4"	1 1/2"	3 1/8"
● 3143	Bronze	1 1/2"	1 1/4"	2 3/4"
● 3142	Bronze	1 1/4"	1 1/8"	2 3/8"
● 3545	Mal. Iron	2"	1 3/4"	3 1/2"
● 3544	Mal. Iron	1 3/4"	1 1/2"	3 1/8"
● 3543	Mal. Iron	1 1/2"	1 1/4"	2 3/4"
● 3542	Mal. Iron	1 1/4"	1 1/8"	2 3/8"
● 3541	Mal. Iron	1"	7/8"	1 3/4"

Round Base				
	a	b	c	
● 3243	Aluminum	1 1/2"	1 1/4"	2 3/4"
● 3045	Bronze	2"	1 3/4"	3 1/2"
● 3044	Bronze	1 3/4"	1 1/2"	3 1/8"
● 3043	Bronze	1 1/2"	1 1/4"	2 3/4"
● 3042	Bronze	1 1/4"	1 1/8"	2 3/8"
● 3041	Bronze	1"	7/8"	1 3/4"

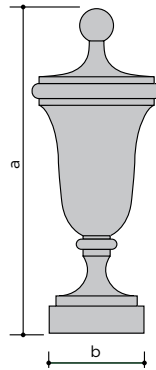


Square Base			
	a	b	
● 3323	Aluminum	3"	1"
● 3126	Bronze	6"	1 3/4"
● 3125	Bronze	5"	1 1/2"
● 3124	Bronze	4"	1 1/4"
● 3123	Bronze	3"	1"
● 3526	Malleable Iron	6"	1 3/4"
● 3525	Malleable Iron	5"	1 1/2"
● 3524	Malleable Iron	4"	1 1/4"
● 3523	Malleable Iron	3"	1"

Round Base			
	a	b	
● 3025	Bronze	5"	1 1/2"
● 3024	Bronze	4"	1 1/4"
● 3023	Bronze	3"	1"
● 4024	Nickel-Silver	4"	1 1/4"

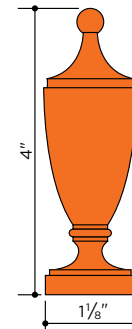

Round Base	
● 3064	Bronze



Round Base	
● 3277†	Aluminum
● 3073	Bronze

† Unpolished


● ALUMINUM ● BRONZE ● NICKEL-SILVER ● MALLEABLE IRON



All castings are double-faced


**CAST ROSETTES**

Thickness: Approx. 1/4"  
Burnished, except as noted



	OD
● 2454 Aluminum	2 3/4"
● 2654 Bronze	2 3/4"
● 1654 Nickel-Silver	2 3/4"
● 2554* Malleable Iron	2 3/4"

\* As Cast



	OD
● 2453 Aluminum	3 5/16" x 2 1/16"
● 2653 Bronze	3 5/16" x 2 1/16"
● 1653 Nickel-Silver	3 5/16" x 2 1/16"
● 2553* Malleable Iron	3 1/2" x 2 3/16"

\* As Cast






	OD
● 6603 Bronze	1 3/4"
● 1603 Nickel-Silver	1 3/4"
● 6203* Malleable Iron	1 3/4"

\* As Cast


**SPINDLE TOPS**

Spindle tops may be used above and/or below 1/2" square bar and may be adjusted to any angle. Scale: 3" = 1'-0"

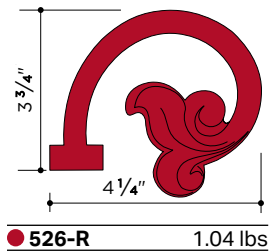


**PICKETS**


Shanks: 1" lengths  
All castings are double-faced



● 53 Aluminum
● 54 Malleable Iron



● 11 Aluminum
● 12 Malleable Iron



● 3 Aluminum
● 4 Malleable Iron





	OD
● 6601 Bronze	1 7/8"
● 1601 Nickel-Silver	1 7/8"
● 6201* Malleable Iron	1 7/8"

\* As Cast



**BALL CAPS**




Rounded inside corners

		Tube Size	Ball Diam.	Height
● 5320	Malleable Iron	2" x 2"	1 <sup>13</sup> / <sub>16</sub> "	3 <sup>3</sup> / <sub>4</sub> "
● 5325	Malleable Iron	2 <sup>1</sup> / <sub>2</sub> " x 2 <sup>1</sup> / <sub>2</sub> "	2 <sup>1</sup> / <sub>8</sub> "	4 <sup>1</sup> / <sub>8</sub> "
● 5330	Malleable Iron	3" x 3"	2 <sup>3</sup> / <sub>16</sub> "	4 <sup>5</sup> / <sub>8</sub> "
● 5335	Malleable Iron	3 <sup>1</sup> / <sub>2</sub> " x 3 <sup>1</sup> / <sub>2</sub> "	2 <sup>1</sup> / <sub>2</sub> "	5 <sup>1</sup> / <sub>8</sub> "
● 5340	Malleable Iron	4" x 4"	2 <sup>3</sup> / <sub>4</sub> "	5 <sup>1</sup> / <sub>2</sub> "

**CAP TYPE A**



Type A bronze and aluminum caps are satin finished. Cast aluminum caps are Almag 35. Bronze caps are cast from C86500 bronze—to match closely the color of extruded architectural bronze—and are lacquered.



Rounded inside corners


		Tube Size	Satin Finish	Tube Size
● 5615	Mal. Iron	1 <sup>1</sup> / <sub>2</sub> " x 1 <sup>1</sup> / <sub>2</sub> "	● 5720	Cast Bronze 2" x 2"
● 5620	Mal. Iron	2" x 2"	● 5730	Cast Bronze 3" x 3"
● 5625	Mal. Iron	2 <sup>1</sup> / <sub>2</sub> " x 2 <sup>1</sup> / <sub>2</sub> "	● 5740	Cast Bronze 4" x 4"
● 5632	Mal. Iron	3" x 2"	● 5784	Cast Bronze 8" x 4"
● 5630	Mal. Iron	3" x 3"		
● 5635	Mal. Iron	3 <sup>1</sup> / <sub>2</sub> " x 3 <sup>1</sup> / <sub>2</sub> "		
● 5640	Mal. Iron	4" x 4"		
● 5642	Mal. Iron	4" x 2"		
● 56425	Mal. Iron	4" x 2 <sup>1</sup> / <sub>2</sub> "		
● 5643	Mal. Iron	4" x 3"		
● 5652	Mal. Iron	5" x 2"		
● 56525	Mal. Iron	5" x 2 <sup>1</sup> / <sub>2</sub> "		
● 5653	Mal. Iron	5" x 3"	● 5820	Cast Alum. 2" x 2"
● 5650	Mal. Iron	5" x 5"	● 5830	Cast Alum. 3" x 3"
● 5663	Mal. Iron	6" x 3"	● 5840	Cast Alum. 4" x 4"
● 5664	Mal. Iron	6" x 4"	● 5863	Cast Alum. 6" x 3"
● 5660	Mal. Iron	6" x 6"	● 5864	Cast Alum. 6" x 4"
● 5683	Mal. Iron	8" x 3"	● 5883	Cast Alum. 8" x 3"
● 5684	Mal. Iron	8" x 4"	● 5884	Cast Alum. 8" x 4"

**DRIVE-ON CAP**



● 5411	Mal. Iron	Drive fit for 1" x 1" .073" structural tubing
--------	-----------	---

**CAP TYPE C**


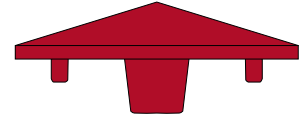


		Tube Size*
● 5415	Malleable Iron	1 <sup>1</sup> / <sub>2</sub> " x 1 <sup>1</sup> / <sub>2</sub> "
● 5440	Malleable Iron	4" x 4"

\* 11 ga. maximum thickness

**CAP TYPE D**


Type D Post Caps are extruded and machined from aluminum alloy 6063 and are suitable for anodizing. Lugs fit inside <sup>1</sup>/<sub>8</sub>" wall tubing with sharp corners and are easily ground down to fit <sup>3</sup>/<sub>16</sub>" or <sup>1</sup>/<sub>4</sub>" wall tubing.

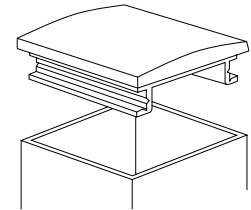

		Tube Size
● 5120	Extruded Aluminum	2" x 2"
● 5130	Extruded Aluminum	3" x 3"
● 5132	Extruded Aluminum	3" x 2"
● 5140	Extruded Aluminum	4" x 4"
● 5142	Extruded Aluminum	4" x 2"
● 5143	Extruded Aluminum	4" x 3"
● 5152	Extruded Aluminum	5" x 2"
● 5153	Extruded Aluminum	5" x 3"
● 5162	Extruded Aluminum	6" x 2"
● 5163	Extruded Aluminum	6" x 3"
● 5164	Extruded Aluminum	6" x 4"
● 5183	Extruded Aluminum	8" x 3"
● 5184	Extruded Aluminum	8" x 4"

**DRIVE-ON CAP, TYPE W**

For drive fit. Caps do not require fastening. 18 ga.



		Tube Size
● 5920	Pressed Steel	2" x 2"
● 5925	Pressed Steel	2 <sup>1</sup> / <sub>2</sub> " x 2 <sup>1</sup> / <sub>2</sub> "
● 5930	Pressed Steel	3" x 3"
● 5935	Pressed Steel	3 <sup>1</sup> / <sub>2</sub> " x 3 <sup>1</sup> / <sub>2</sub> "
● 5943	Pressed Steel	4" x 3"
● 5940	Pressed Steel	4" x 4"
● 5963	Pressed Steel	6" x 3"
● 5933	Pressed Stainless Steel	3" x 3"
● 5944	Pressed Stainless Steel	4" x 4"

# TREILLAGE AND ORNAMENTAL RAILING PANELS



Private Residence, MA, Make Architectural Metalworking, West Wareham, MA (Fabricator),  
Platemark, Boston, MA (Architect), FBN Construction, Hyde Park, MA (General Contractor).

## ORNAMENTAL RAILING PANELS

Julius Blum & Co., Inc.'s malleable iron railing panels are also used to provide architectural details on both stairs and straight runs. Some of the panels have been slightly redesigned to meet current code requirements.

## ORNAMENTAL COLLARS

Designed to fit over  $\frac{1}{2}$ " or  $\frac{5}{8}$ " square bars, ornamental collars are a cost effective way of providing details to a stair, fence, or gate. A wide variety of design options are possible using a combination of ornamental collars.

## TREILLAGE

All Julius Blum & Co., Inc. treillage panels are double-faced and superbly detailed. Because they are malleable iron, they may be welded and bent cold and will not break or shatter in the course of normal handling.

Many of the Julius Blum Treillage patterns are available in both aluminum and malleable iron. Aluminum castings are recommended where it is important to keep weight at a minimum, as in gates or removable screens. Otherwise, malleable iron castings are preferred for their strength and resistance to breakage. All castings are double-faced and cleanly finished. Made in USA.

- **Aluminum** items are cast from Almag 35. Anodizing of aluminum panels is not recommended as the material will not anodize consistently and will not match the color of anodized extruded aluminum.
- **Malleable Iron** is similar in weight, feel, and appearance to gray iron—commonly known as cast iron. Gray iron is suitable for small, simple

pieces such as post caps or heavy, solid pieces such as manhole covers. It is not suitable for delicate ornamental cast patterns such as scrolls and flowers. Gray iron is brittle and shatters easily when dropped or hit and is subject to cracking when exposed to uneven heat during welding. Malleable iron will not break or shatter in the course of ordinary handling or shipping and withstands considerable abuse. To some degree, malleable iron castings can be bent cold, and they are easily welded. The special properties of malleable iron are produced by heat treating.

Malleable Iron Castings are not priced to compete with gray iron castings. Despite the unsuitability of gray iron for intricate ornamental castings, many ornamental

patterns are offered in this cheaper material. Since the manufacture of gray iron castings requires fewer operations than heat-treated malleable iron, and since they are not finished with the care of Julius Blum ornamental castings, they can be sold for less. However, breakage during shipping, fabrication, installation, and everyday use often eradicats savings from the initial lower cost. In the long run, the permanence and quality of the final product make malleable iron more desirable. When panels are assembled into screens spanning more than three panels' width or height, it is important to provide adequate intermediate supports.

All items are carried in stock in substantial quantities and are available for prompt shipment.

● MALLEABLE IRON

**CAMBRIDGE**

**Ornamental Panels**

The four elements of the Cambridge design can be combined in many different ways to form panels, columns or friezes. The castings are cored to slide over a 1/2" square bar.

● **596** 3.6 lbs  
Ht: 10 1/8" Wd: 8"

● **597** 2.6 lbs  
Ht: 9 5/16" Wd: 8"

● **598** 2.8 lbs  
Ht: 6 3/16" Wd: 8"

● **599** 4.1 lbs  
Ht: 11 7/8" Wd: 8"

● **596** 3.6 lbs  
Ht: 10 1/8" Wd: 8"

● **597** 2.6 lbs  
Ht: 9 5/16" Wd: 8"

● **598** 2.8 lbs  
Ht: 6 3/16" Wd: 8"

● **599** 4.1 lbs  
Ht: 11 7/8" Wd: 8"

7 1/16"  
6 3/16"  
8"  
10 1/8"  
1/2" sq. bar

**EMPIRE**

For 1/2" square bar. Diamond-shaped cross section gives these panels a distinctive style.

● **963** 1.76 lbs  
Ht: 11" Wd: 8"

● **964** 2.03 lbs  
Ht: 11" Wd: 8"


● **965** 2.72 lbs  
Ht: 11" Wd: 8"

● **967** 1.04 lbs  
Ht: 5 1/2" Wd: 5 1/4"

● **968** 1.14 lbs  
Ht: 5 1/2" Wd: 5 1/4"

● **969** .82 lbs  
Ht: 5" Wd: 5"

**TYPICAL SECTION THROUGH COLLARS**

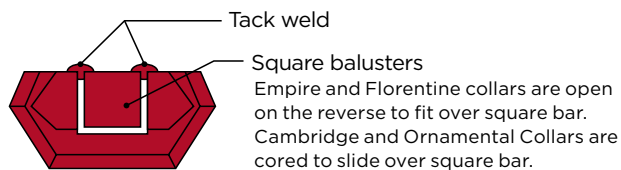

**FLORENTINE**

**Railing Panels**

For 1/2" square bar, except as noted

Florentine collars are open on one side for easy installation over square bar by tack welding.

● **559** 3.0 lbs  
Ht: 15" Wd: 7"

● **560** 3.6 lbs  
Ht: 16" Wd: 8 1/2"

● **561** 1.9 lbs  
Ht: 12" Wd: 8 1/2"

● **562\*** 3.8 lbs  
Ht: 15" Wd: 7"

● **563\*** 3.9 lbs  
Ht: 16" Wd: 8 1/2"

● **564\*** 2.6 lbs  
Ht: 12" Wd: 8 1/2"

\* For 5/8" square bar

● **565** 3.3 lbs  
Ht: 15" Wd: 8 1/2"

● **566** 2.9 lbs  
Ht: 16" Wd: 7"

● **567** 3.3 lbs  
Ht: 16" Wd: 8 1/2"

**FLORENTINE ORNAMENTAL COLLARS †**

These collars are cored to slide over 1/2" square bar except as noted. Collars are easily applied and can be fastened by screws or by tack welding.

● **543** .870 lbs  
Ht: 4 3/4" Wd: 4 1/2"

● **544** .685 lbs  
Ht: 4 3/4" Wd: 3"

● **546** .767 lbs  
Ht: 7 3/4" Wd: 3"

● **535\*** 1.160 lbs  
Ht: 4 7/8" Wd: 4 1/2"

● **545\*** .686 lbs  
Ht: 4 3/4" Wd: 3"


● **547\*** .865 lbs  
Ht: 7 3/4" Wd: 3"

† Scale: 2 1/2" = 1" - 0" \* For 5/8" square bar


TREILLAGE AND ORNAMENTAL RAILING PANELS

All castings are double-faced. Scale: 1 1/2" = 1'-0"


● ALUMINUM ● MALLEABLE IRON

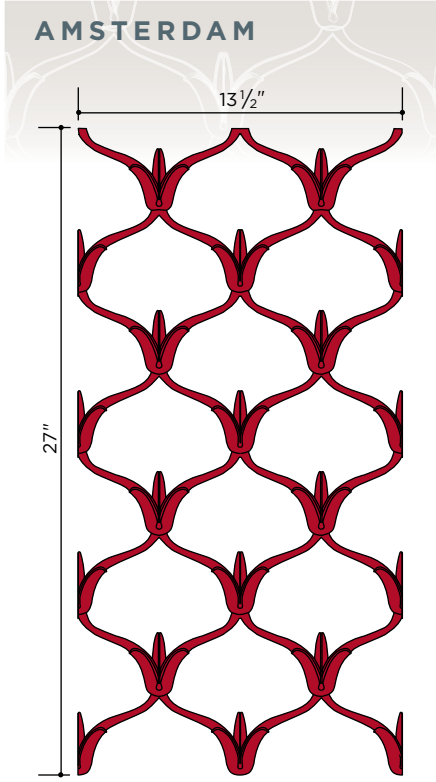


● 590 Malleable Iron 10.5 lbs

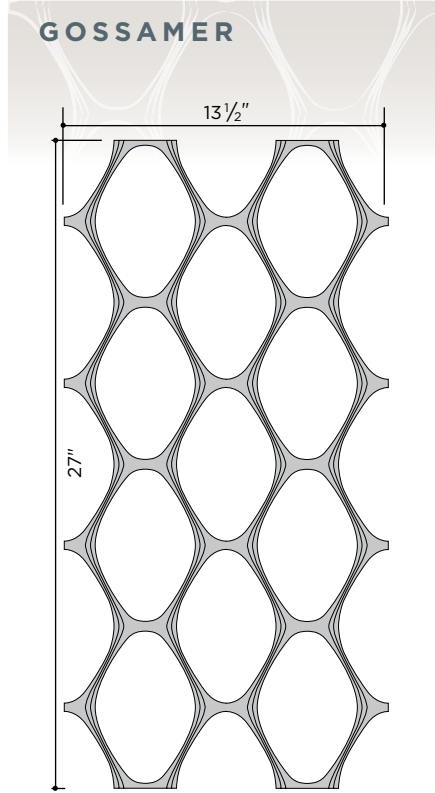


● 1585 Aluminum 3.4 lbs  
● 585 Malleable Iron 10.2 lbs

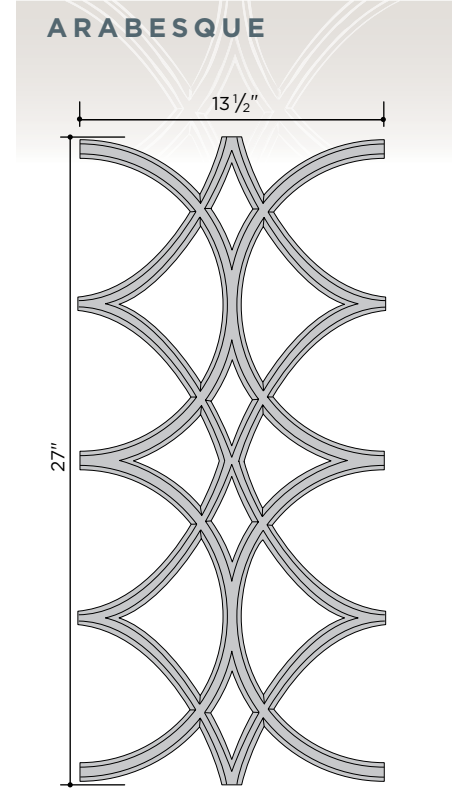


● 1961 Aluminum 2.6 lbs  
● 961 Malleable Iron 7.7 lbs

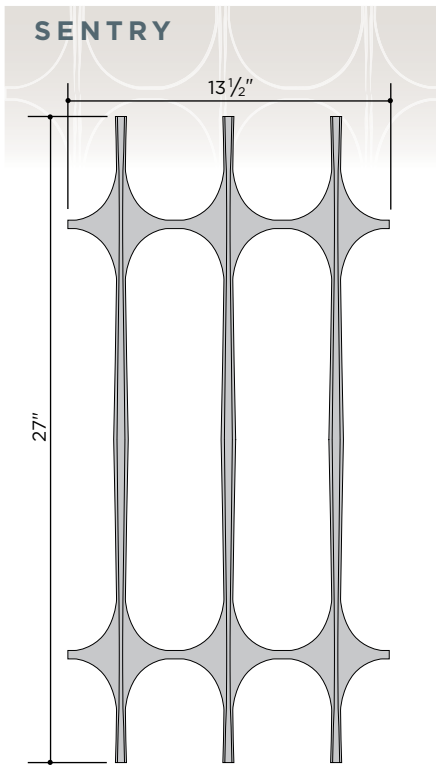

● 1579 Aluminum 2.8 lbs  
● 579 Malleable Iron 8.4 lbs

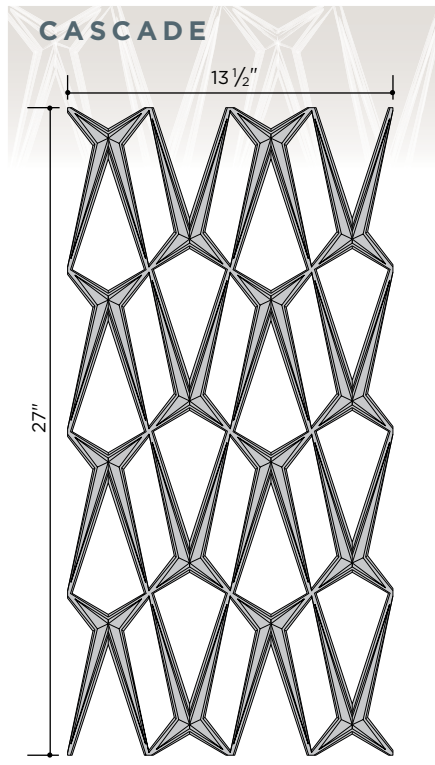



● 1583 Aluminum 4.3 lbs  
● 583 Malleable Iron 12.8 lbs

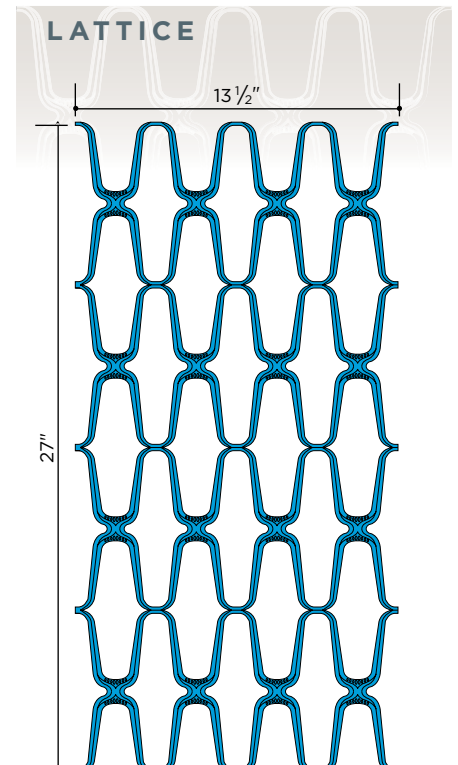



● 1508 Aluminum 3.1 lbs

● ALUMINUM ● MALLEABLE IRON


All castings are double faced. Scale: 1 1/2" = 1'-0", except as noted.

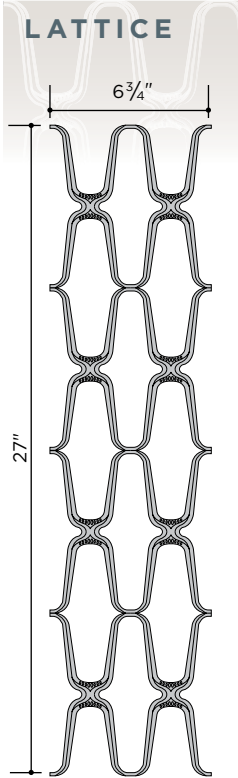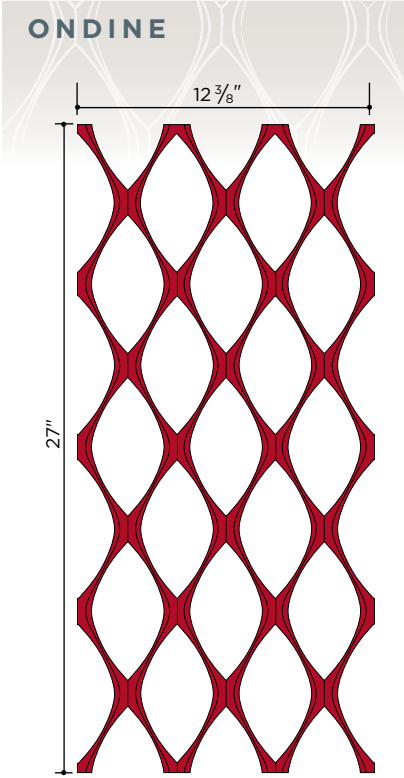


**TRECENTO**  
 Trecento panel 1963 dovetails with mullions 6433 or 6432. Panels can be arranged in continuous runs or make right-angle turns, tees, or crosses. Panels can be stacked to form solid screens or separated by lengths of filler rod 6431 to achieve a more open effect. Filler rod 6431 may also be used to close the recess in the exposed sides of the mullion. Panels may be locked into position by tack welding, caulking, set screws, or pins.

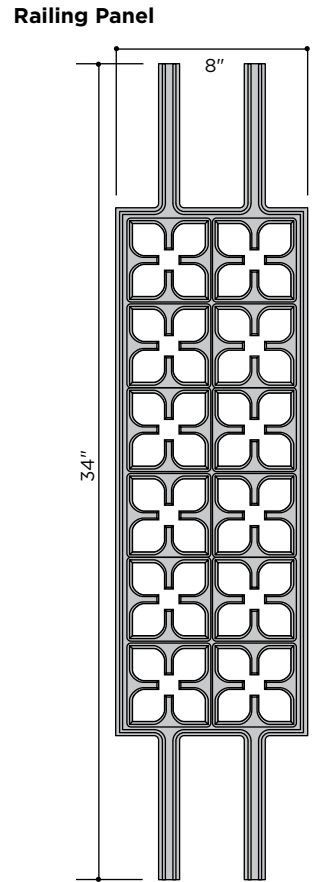


● 1963 Aluminum .80 lb/ft

**Filler Rod\***  
 6' lengths

● 6431 Aluminum .063 lb/ft  
 \*Scale: 6" = 1'-0"

**Edge Mullion\***  
 20' lengths


● 6432 Aluminum .660 lb/ft

**Mullion\***  
 20' lengths

● 6433 Aluminum .493 lb/ft


● 1962 Aluminum 4.3 lbs

● 962 Mal. Iron 12.6 lbs


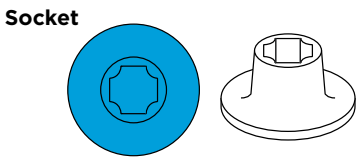


● 763 Aluminum  
 For mullion 6433 2 3/4" diameter flange  
 Scale: 3" = 1'-0"

**Assembly Detail**

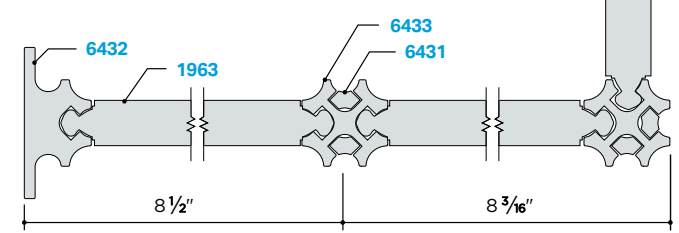

Panels can be joined both vertically and horizontally to form screens and grilles.

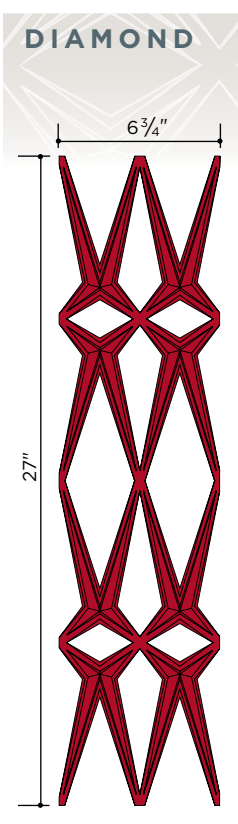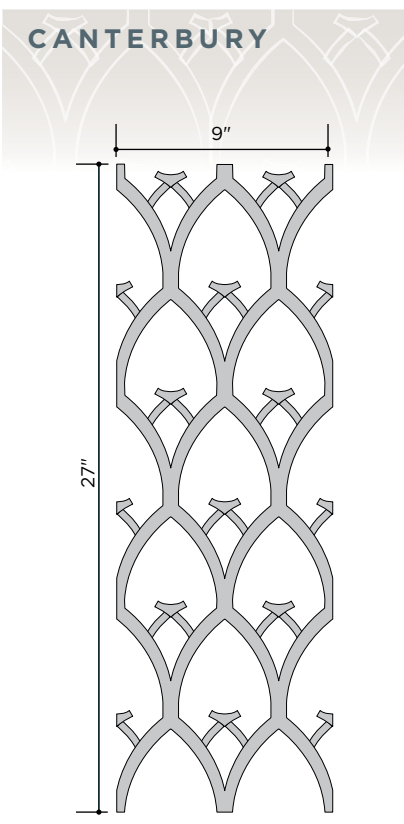

● 1589 Aluminum 3.0 lbs  
 ● 589 Mal. Iron 8.8 lbs

● 542 Mal. Iron 6.4 lbs


TRELLAGE & ORNAMENTAL RAILINGS PANELS

All castings are double-faced. Scale: 1½" = 1'-0"

● MALLEABLE IRON

CHATEAU


Railing Panels

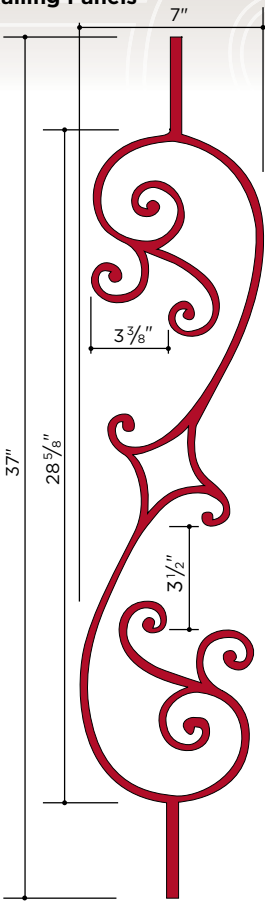


● 537\* Malleable Iron 5.5 lbs  
Cross Section: Scroll – 1/2" x 5/16"  
Ends – 1/2" x 1/2"




● 538\* Malleable Iron 7.0 lbs  
Cross Section: Scroll – 5/8" x 7/16"  
Ends – 1/2" x 1/2"

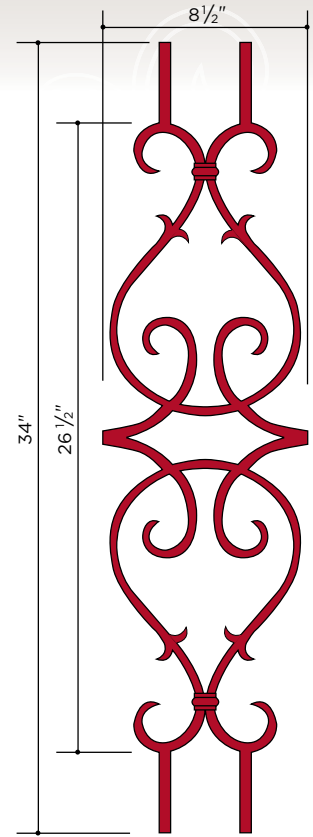

● 539\* Malleable Iron 7.8 lbs  
Cross Section: Scroll – 5/8" x 7/16"  
Ends – 1/2" x 1/2"

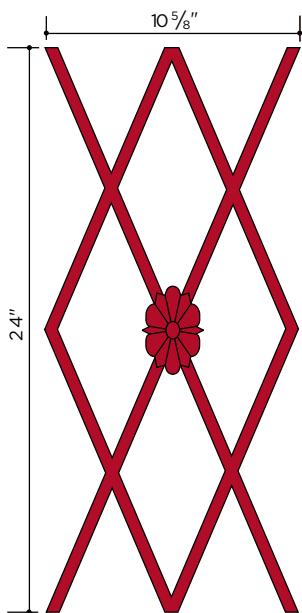

● 540 Malleable Iron 9 lbs  
Cross Section: 5/8" x 1/2"

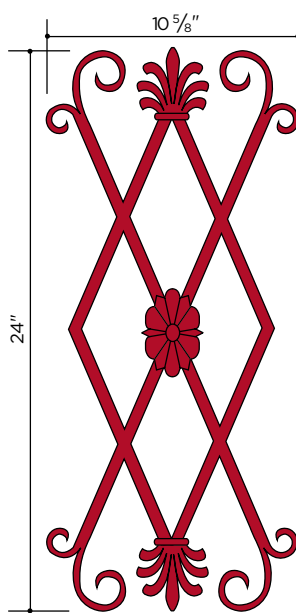

● 541\* Malleable Iron 10 lbs  
Cross Section: 5/8" x 1/2"



The illustration is intended to be an example of ways Treillage and Traditional Railing components may be combined.

When framed, the open spaces will conform to 4" sphere requirement.

Panels 540 and 541 may be combined both horizontally and vertically and combined with spindles.

● MALLEABLE IRON

All castings are double faced. Scale: 1 1/2" = 1'-0"

**BORDEAUX**


**CHARNWOOD**



● **513** 25.2 lbs  
Ht: 36" Wd: 36"  
Corner Bracket

● **514** 3.4 lbs  
Ht: 6 1/2" Lt: 14"  
Valance

Furnished in three sections

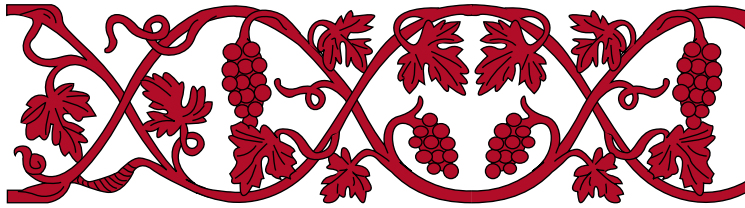


● **511** 11.2 lbs  
Ht: 8 1/4" Lt: 31"  
Frieze




● **510\*** 13.6 lbs  
Ht: 29" Wd: 8 1/4"  
Railing Panel



● **515B\*** 4.9 lbs  
Ht: 21" Wd: 11 1/2"  
Corner Bracket




● **512** 4.0 lbs  
Ht: 8 1/4" Wd: 8 1/4"  
Corner Rosette

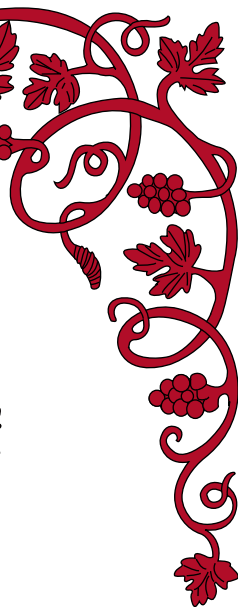


● **515** 8.7 lbs  
Ht: 23 1/2" Wd: 25"  
Corner Bracket


Furnished in two sections

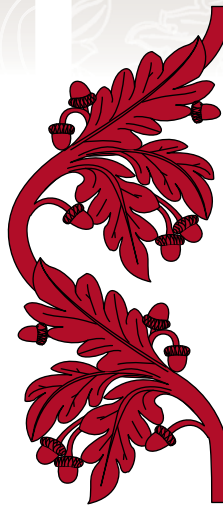

● **555** 9.2 lbs  
Ht: 20 3/4" Wd: 9 1/4"  
Continuous design

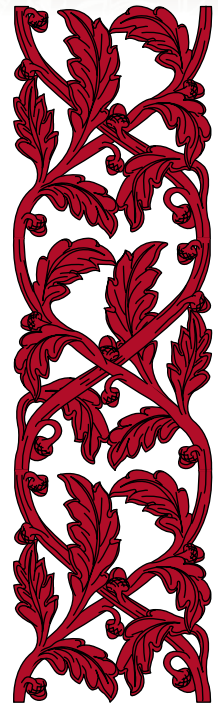

● **548** 12.3 lbs  
Ht: 27 3/4" Wd: 8"  
Railing Panel

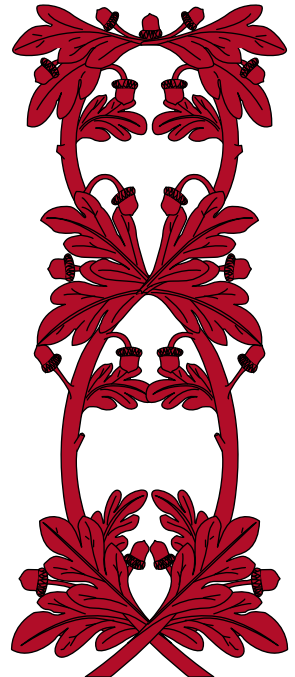


● **558** 16.8 lbs  
Ht: 28" Wd: 11 1/2"  
Railing Panel

\* Color removed to show detail

All castings are double faced. Scale: 1 1/2" = 1'-0"

● MALLEABLE IRON

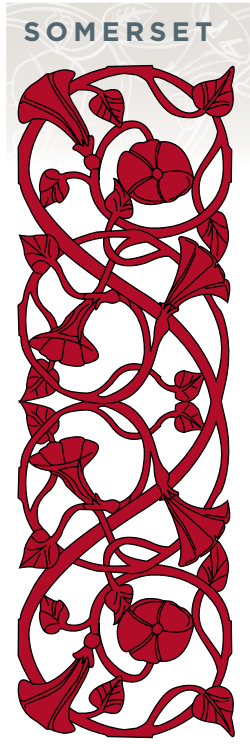


SOMERSET

● 580 13.0 lbs  
Ht: 28" Wd: 9"  
Railing Panel



● 581\* 4.1 lbs  
Ht: 9" Wd: 9"  
Corner Rosette

\*Color removed to show detail

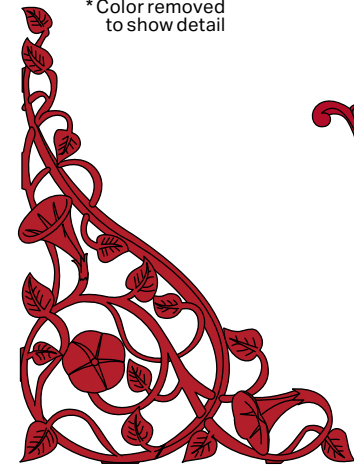


● 582 6.5 lbs  
Ht: 14" Wd: 19"  
Corner Bracket



REGENCE

● 525 4.2 lbs  
Ht: 13 5/8" Wd: 6 7/16"  
End Panel

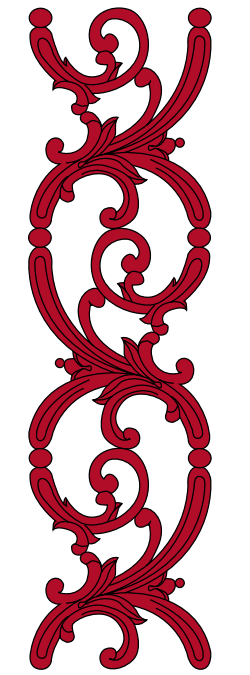

● 576 10.1 lbs  
Ht: 29" Wd: 8"  
Railing Panel



● 577 8.2 lbs  
Ht: 15 1/4" Wd: 18"  
Corner Bracket




SIENA


● 523 6.9 lbs  
Ht: 20 1/4" Wd: 6 7/16"  
Continuous design

● 522 8.4 lbs  
Ht: 20 3/8" Wd: 6 7/16"  
Continuous design

Repeat or alternate 522 and 523 for continuous runs in columns or friezes.

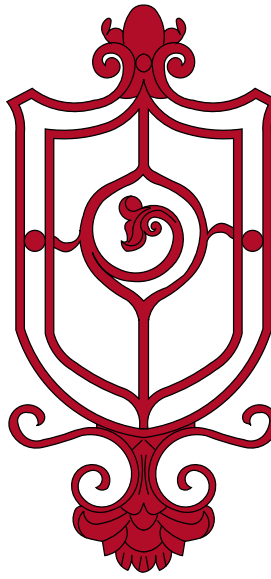


● 521 16.0 lbs  
Ht: 24 7/8" Wd: 12"  
Railing Panel

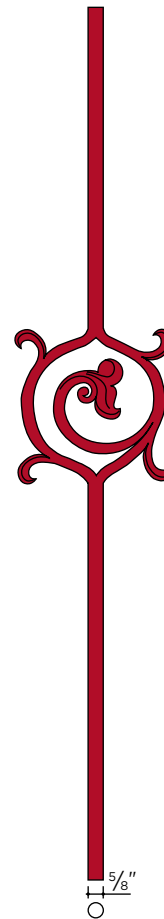

● 532 5.0 lbs  
Ht: 36"  
Baluster Bar


● 520 10.5 lbs  
Ht: 24 7/8" Wd: 6 7/16"  
Railing Panel

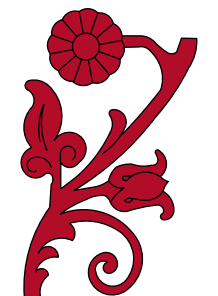

● 524 4.3 lbs  
Ht: 12" Wd: 6 7/16"  
Starting Panel



● 526 2.6 lbs  
Ht: 6 7/16" Wd: 6 7/16"  
Corner Rosette




● 578 3.2 lbs  
Ht: 8" Wd: 8"  
Corner Rosette


● MALLEABLE IRON

All castings are double faced. Scale: 1 1/2" = 1'-0"


DRESDEN

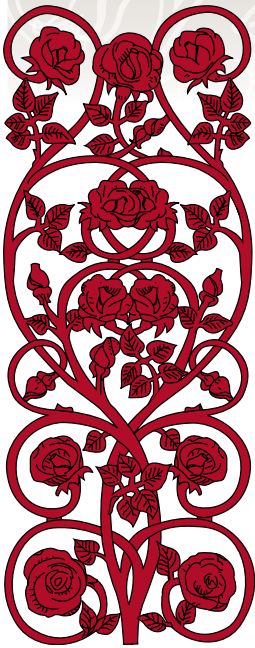

● 571 14.0 lbs  
Ht: 28" Wd: 11"  
Railing Panel

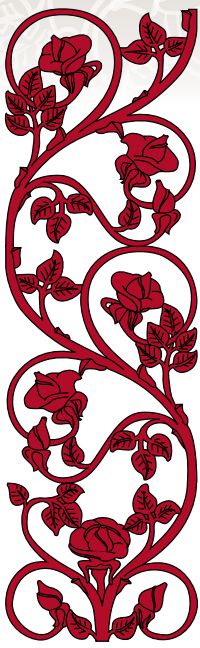

● 568 8.7 lbs  
Ht: 28" Wd: 8 1/2"  
Railing Panel  
Use together with 569

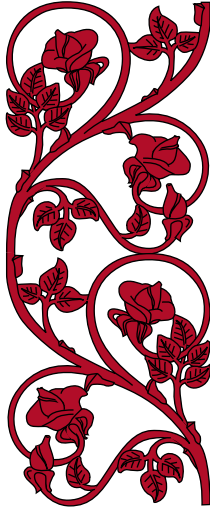

● 569 6.5 lbs  
Ht: 21" Wd: 8 1/2"  
Continuous design




● 572 5.7 lbs  
Ht: 22 1/2" Wd: 7"  
Continuous design



● 574 5.0 lbs  
Ht: 10 1/4" Wd: 16"  
Corner Bracket




● 573 2.3 lbs  
Ht: 7" Wd: 7"  
Corner Rosette



● 570 4.1 lbs  
Ht: 12 1/2" Wd: 8 1/2"  
Collar  
Collar is open on one side to fit over 1/2" square bar

ROCOCO

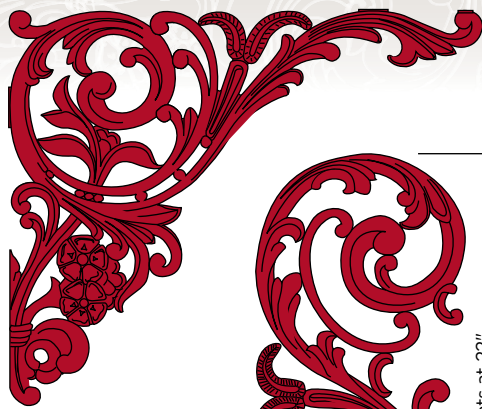


● 588 10.5 lbs  
Ht: 16 1/2" Wd: 19 3/4"  
Corner Bracket




● 587 10.7 lbs  
Ht: 23 1/4" Wd: 8 3/4"  
Continuous design

Design repeats at 22"

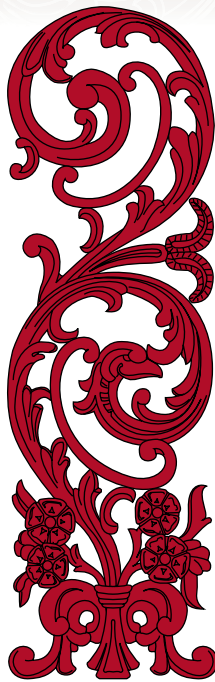


● 586 14.9 lbs  
Ht: 28" Wd: 8 3/4"  
Railing Panel


CORINTHIAN

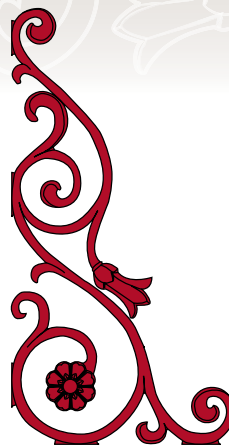

● 552 4.3 lbs  
Ht: 10" Wd: 19"  
Corner Bracket



● 551 2.4 lbs  
Ht: 7 1/8" Wd: 7 1/8"  
Corner Rosette

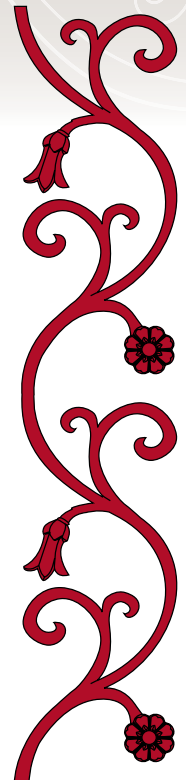


● 550 6.7 lbs  
Ht: 34" Wd: 7 1/8"  
Continuous design

● MALLEABLE IRON


MILAN




● 519 12.5 lbs  
Ht: 32" Wd: 7<sup>5</sup>/<sub>8</sub>"  
Railing Panel

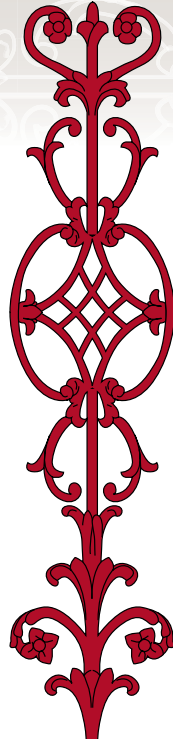

● 518 11.3 lbs  
Ht: 35<sup>1</sup>/<sub>2</sub>" Wd: 7<sup>5</sup>/<sub>8</sub>"  
Railing Panel

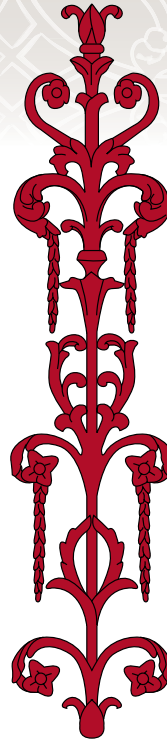

● 517 12.0 lbs  
Ht: 34<sup>1</sup>/<sub>2</sub>" Wd: 7<sup>5</sup>/<sub>8</sub>"  
Railing Panel



● 516 3.7 lbs  
Ht: 8<sup>1</sup>/<sub>4</sub>" Wd: 13<sup>1</sup>/<sub>4</sub>"  
Corner Bracket


Being of equal width, Milan panels may be stacked vertically.

PRIMAVERA



● 584\* 9.9 lbs  
Ht: 29" Wd: 6<sup>1</sup>/<sub>2</sub>"  
Railing Panel


\* Color removed to show detail

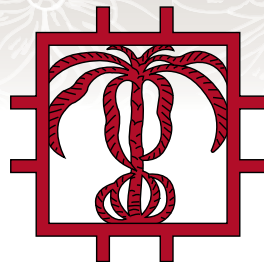


● 591 3.9 lbs  
Ht: 10" Wd: 10"  
(Without legs: 8" x 8")




● 592 3.4 lbs  
Ht: 10" Wd: 10"  
(Without legs: 8" x 8")



● 595 3.7 lbs  
Ht: 10" Wd: 10"  
(Without legs: 8" x 8")

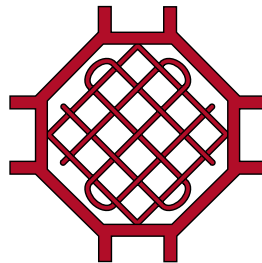

● 593 3.2 lbs  
Ht: 10" Wd: 10"  
(Without legs: 8" x 8")

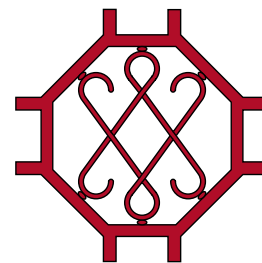


● 594 3.0 lbs  
Ht: 10" Wd: 10"  
(Without legs: 8" x 8")

All castings are double-faced. Scale: 1 1/2" = 1'-0" except as noted


● MALLEABLE IRON / PRESSED STEEL

**PRESSED STEEL MOULDINGS**

10' lengths, 100' minimum order



● **2855** Wd: 3 1/4"  
Pressed Steel



● **2870** Wd: 3 1/4"  
Pressed Steel



● **2866** Wd: 3 1/4"  
Pressed Steel



● **2859** Wd: 2"  
Pressed Steel



● **2861** Wd: 1 5/16"  
Pressed Steel

**PRESSED STEEL LEAVES\*\***



● **2016** Lt: 4 1/2"



● **2017** Lt: 4 1/2"



● **2023** Lt: 5"



● **2003** Lt: 3 1/2"



● **2023** Lt: 5"



● **2932** Wd: 2 1/2"




	Length
● <b>2012</b>	6"
● <b>2014</b>	10 1/4"
● <b>2015</b>	11"




● **2982** Lt: 9 1/4"

**PRESSED STEEL ROSETTES\*\***

Malleable Iron



	OD
● <b>2515</b>	1 1/2"
● <b>2528</b>	2"
● <b>2538</b>	3"



	OD
● <b>2611</b>	2 3/8"
● <b>2616</b>	3 5/8"



● **2524** Wd: 1 3/8"

**PRESSED STEEL CANDLE PANS AND HUSKS\*\***

Malleable Iron



● **2726**  
Ht: 5 1/2" Wd: 2 1/4"



● **2719**  
Ht: 5 1/2" Wd: 2 1/4"



● **2640** OD: 3 3/4"




● **2717**  
Ht: 3 1/4" Wd: 3 1/4"

\*\* 100 piece packages




Shawnee County Courthouse, Topeka, KS, Senne Company, Topeka, KS (Fabricator), HTK Architects, Topeka, KS (Architect).

222

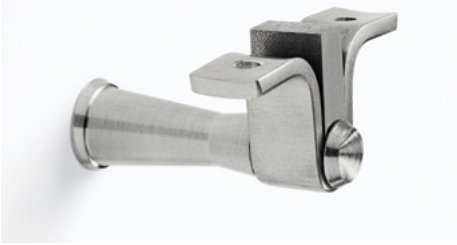

6532

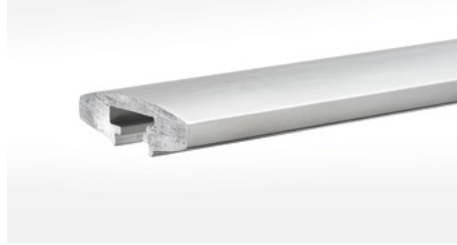

813



The **Carlstadt®** railing system features a full range of components available in aluminum, bronze, nickel-silver, and stainless steel to meet virtually any installation requirement. Posts and handrails may be combined with a variety of post, wall, and fascia brackets to achieve a wide range of design alternatives while meeting code and other regulatory requirements. The Carlstadt® system is designed for non-welded assembly.

- **Aluminum** railing components are made of alloy 6063, except for cast flanges, corner bends, and floor flanges, which are cast from Almag 35. Aluminum extrusions are produced and handled with great care for use in architectural applications and are suitable for most of the hard coat anodic processes. Black anodizing may result in inconsistent matches. Consult your anodizer before specifying.
- **Bronze** components are made of extruded architectural bronze alloy C38500, except for cast cover flanges, corner bends, and terminals, which are cast from alloy C86500.
- **Nickel-Silver** components are extruded of alloy C79800. Nickel-silver is a copper alloy which has the color of stainless steel with golden highlights.
- **Stainless Steel** components are made of type 302/304 (18-8) stainless steel.

The *Americans with Disabilities Act* adopted by Congress in 1992 required circular handrails to be 1¼" minimum and 1½" maximum. However, the *Guidance on the 2010 ADA Standards for Accessible Design - September 2010*, published by the US Department of Justice, has now clarified the intent of the dimensional requirements to be an outside diameter of 1¼" to 2".

Americans With Disabilities Act Accessibility Guidelines (ADAAG) also allows handrails that provide an equivalent gripping surface. ANSI117.1-17 defines this alternative: *equivalent gripping surfaces are permitted provided they have a perimeter dimension of 4" (100mm) minimum and 6¼" (160mm) maximum and provided their largest cross-section dimension is 2¼" (57mm) maximum.*

### CARLSTADT® FITTINGS

A complete selection of fittings is available for the Carlstadt® system. Self-aligning wall, post, and mounting brackets are recommended for unusual ramp or stair angles. Handrails may be mounted using flat bars and channels, joined with non-welded corner bends, or closed with end caps. A wide range of cover flanges, fascia flanges, reinforcing bars, and post caps are also available.


### CARLSTADT® RAILING

The Carlstadt® railing system provides a flexible range of railing and post components in aluminum, bronze, nickel-silver, and stainless steel to meet almost any installation or code requirement. The Carlstadt® railing system uses Carlstadt® self-aligning handrail brackets. It is the engineer of record's responsibility to evaluate base metal and sleeve compatibility with dissimilar metals.


## EXAMPLES OF CARLSTADT® RAILING CONFIGURATIONS

The illustrations are intended to be examples of ways Connectorail®, Carlstadt®, and Traditional Railing components may be combined. See Juliusblum.com for part numbers and details.

### SURFACE-MOUNTED

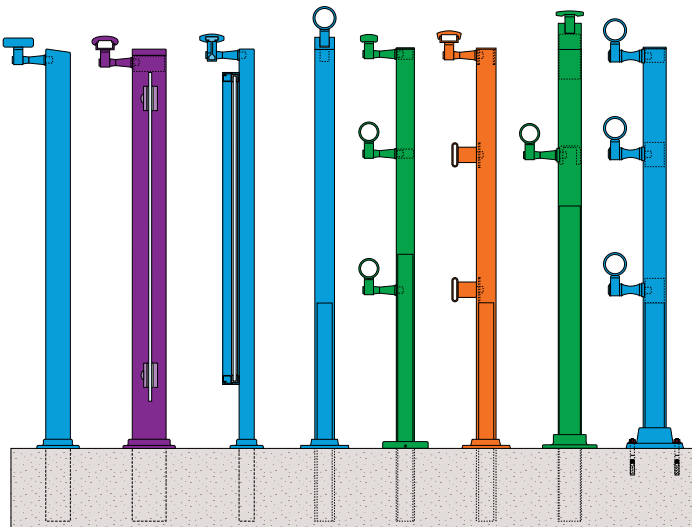


### FASCIA-MOUNTED

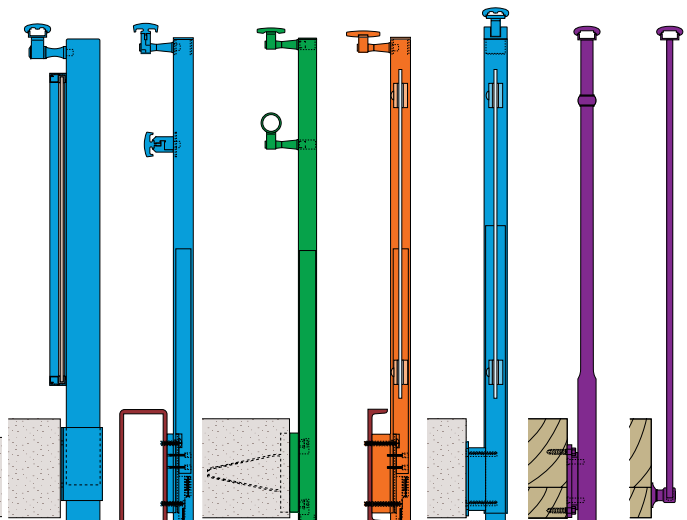

**CARLSRAIL® HANDRAIL**

20' lengths



The Carlstadt® system for non-welded assembly also features a range of components. Carlsrail® handrail sections may be mounted using channels and then applied directly to the top of a picket or post.

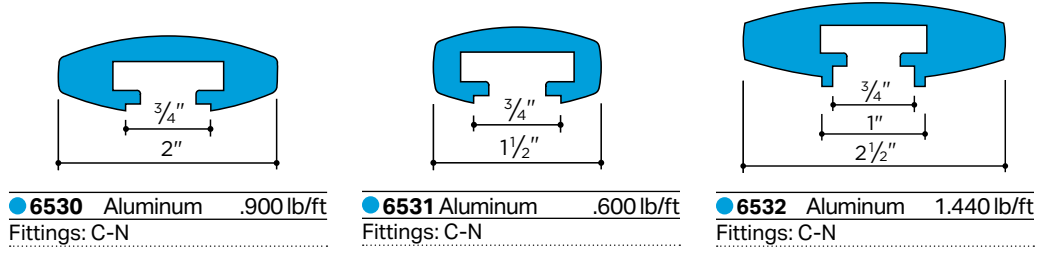

**SUPPORT BAR**

6063-T6

A slip fit support bar adds both vertical and horizontal stiffness to the handrail mouldings, when required.

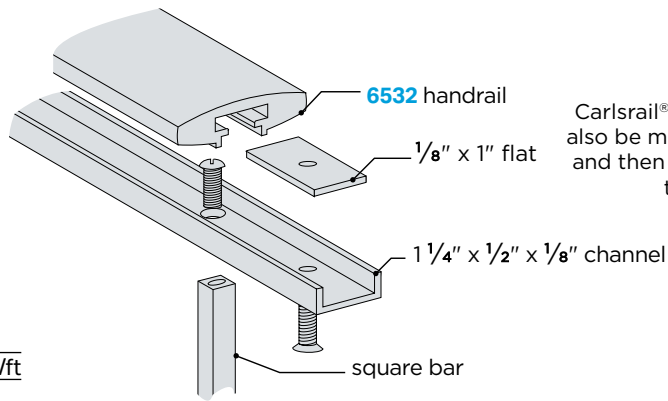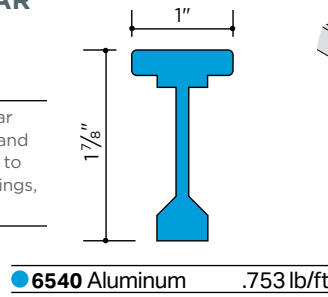


Carlsrail® handrail sections may also be mounted using channels and then applied directly to the top of a picket or post.

**Splicing**

An internal splice is used to attach corner bends and wall returns, as a connector for continuous runs, and for expansion joints. A set screw tightens and draws components together.


**SPLICE INSERT**




**104** Aluminum  
Also available in 16' lengths without holes or set screws **104-16**

**CORNER SPLICE INSERT**


Cast, Almag 35



**105** Aluminum

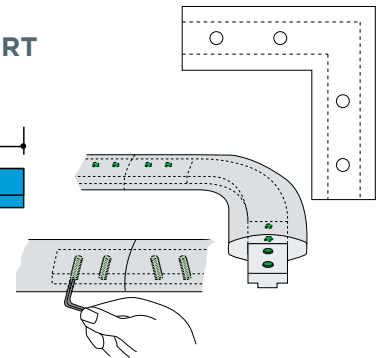


**END CAP**

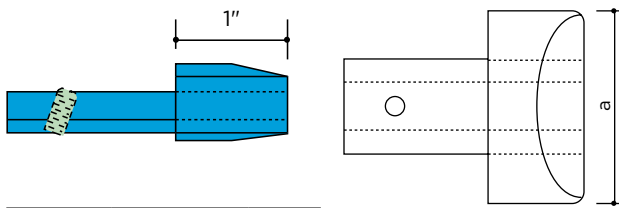

<b>6531N</b> Aluminum	1 1/2"
<b>6530N</b> Aluminum	2"
<b>6532N</b> Aluminum	2 1/2"

**CORNER BEND**

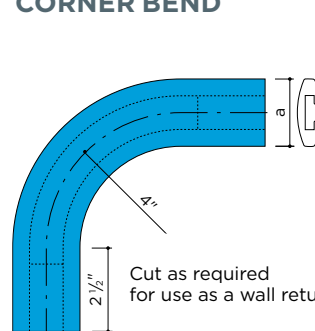


<b>6531C</b> Aluminum	1 1/2"
<b>6530C</b> Aluminum	2"
<b>6532C</b> Aluminum	2 1/2"

● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STAINLESS ● PVC


**CARLSRAIL® BRACKET ASSEMBLY**

The Carlstadt® bracket assembly features a two-part clamp that, upon slipping together, simultaneously engages the bracket arm and the handrail without requiring drilling or tapping.

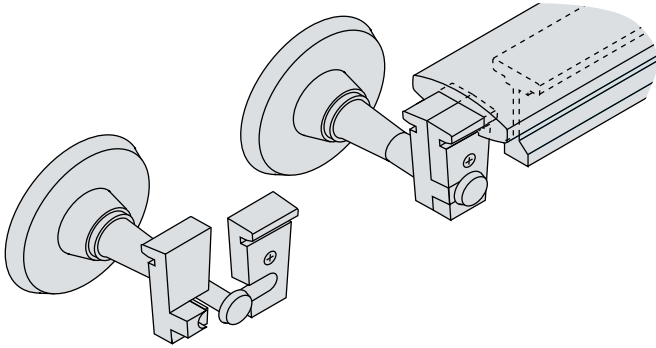

**CARLSRAIL® SELF-ALIGNING WALL BRACKETS**


Satin Finish

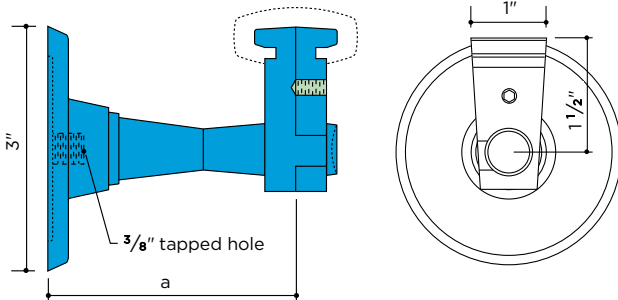

For use with Carlsrail® handrail moulding		a
● 173	Aluminum	3"
● 174	Aluminum	3 1/2"
● 175	Aluminum	2 1/4"

**CARLSRAIL® SELF-ALIGNING POST BRACKETS**

Satin Finish

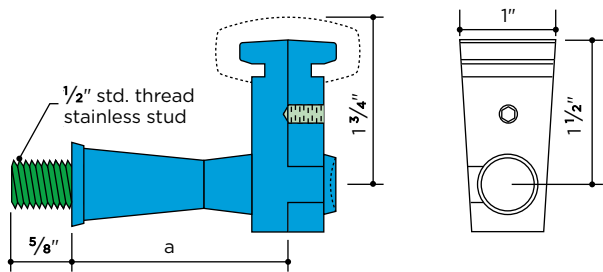


For use with Carlsrail® handrail moulding		a
● 171	Aluminum	2 1/4"
● 172	Aluminum	2 3/4"

**CARLSRAIL® WALL & POST BRACKET EXTENSIONS**


Satin Finish

**For Post Brackets**

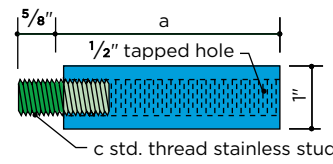

	a	c
● 462* Aluminum	1 3/4"	1/2"
● 463* Aluminum	3"	1/2"


**For Wall Brackets**



	a	c
● 464 Aluminum	1 3/4"	3/4"
● 465 Aluminum	3"	3/4"

Extensions may be cut to length to suit individual conditions. Trim wall bracket extensions to no shorter than 1 5/8". Designers should note that extending a bracket increases stress at its base and reduces allowable load.


**PANEL CLIPS**

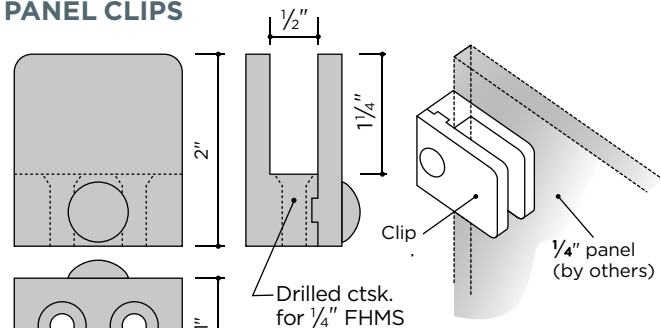


● 113	Aluminum
● 813	Bronze
● 413	Nickel-Silver
● 213	Stainless

**GLAZING MEMBERS**

Aluminum glass stop/snap-in and flexible PVC glazing channel serve to mount panels of 1/4" glass, plastic, wire mesh, or other material.




**Glass Stop 20' lengths**




● 8106	Aluminum	.276 lb/ft
● 8206	Aluminum Anodized	.276 lb/ft

**Snap-in 20' lengths**



● 8107	Aluminum	.138 lb/ft
● 8207	Aluminum Anodized	.138 lb/ft


**Flexible PVC Channel 50' coils**



● 8708	Flexible PVC	90 durometer
--------	--------------	--------------


**PRECUT SOLID ALUMINUM POSTS**

Aluminum 6063-T52, Mill Finish, 48" lengths  
Upper end has been trimmed as shown—no post cap is required.  
Lower end may be cut to achieve required post height. Drill and tap to receive Carlstadt® post brackets.

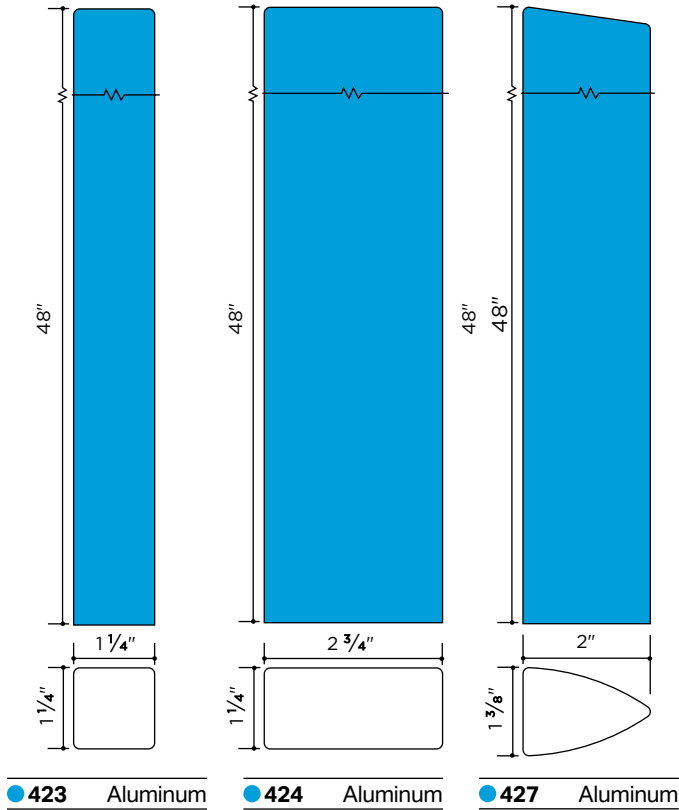

**BAR STOCK FOR RAILING POSTS**

Aluminum 6063-T52, 20' lengths. Mill Finish.


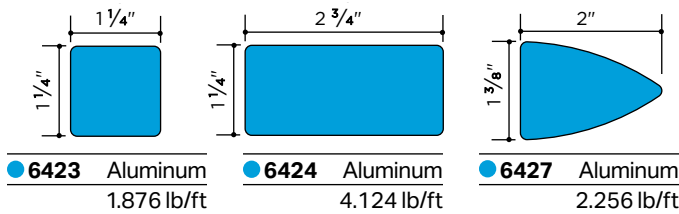


**Installation Details**

Post is set in metal sleeve in concrete and grouted. Embed post to a depth of 4" to 6" in slab. Allow for a 1" grout pad beneath post. Sleeve should provide ample clearance around post for grouting and to allow for adjustment to field variations. For outdoor installations, weep holes should be drilled in the posts to prevent water from collecting below ground level. A cover flange conceals the floor opening.

**COVER FLANGES**



Satin Finish

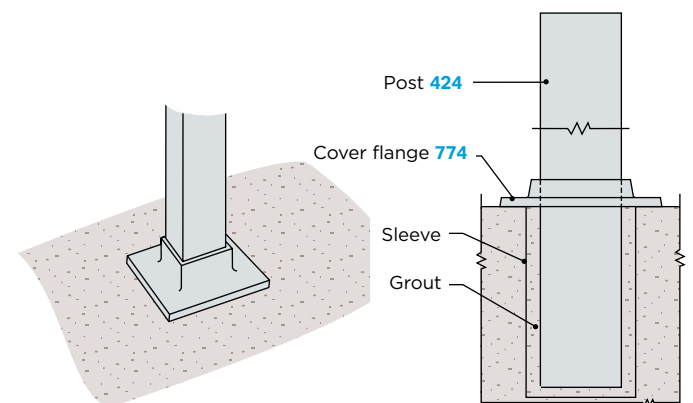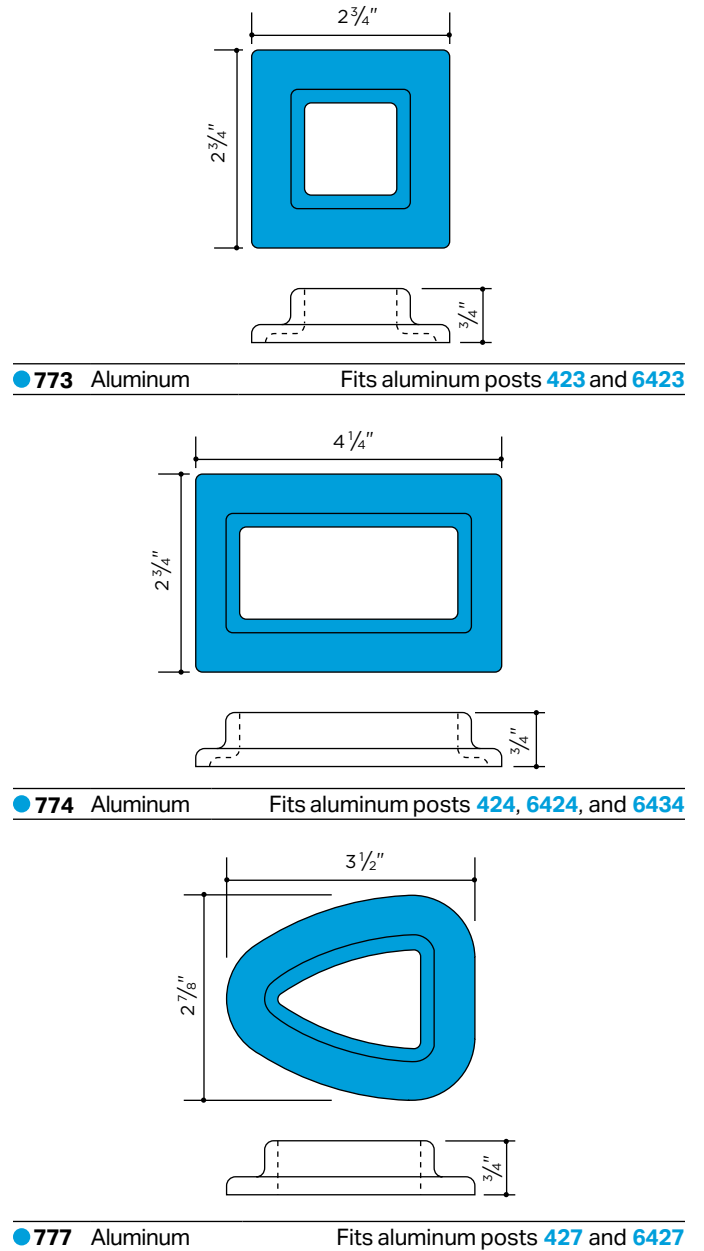


● ALUMINUM

**FASCIA FLANGES**


Sleeve-type fascia flanges are provided with two clearances for mounting on solid or channel fascias and stringers. The post slips into the pocket of the fascia flange and is anchored with concealed set screws. The bottom extension of each fascia flange matches the profile of the post and is trimmed to match its top.

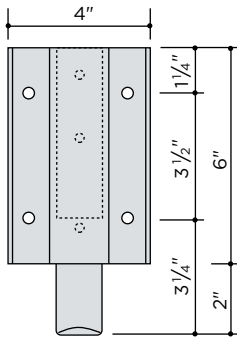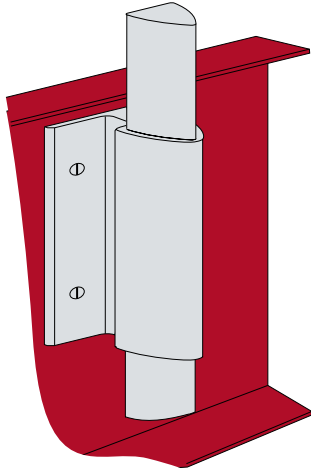

Elevation of **425** and **426**

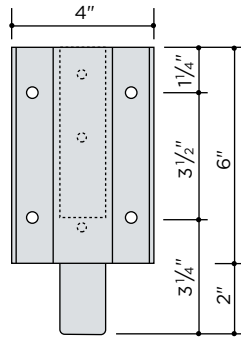


Elevation of **408**, **421**, and **422**

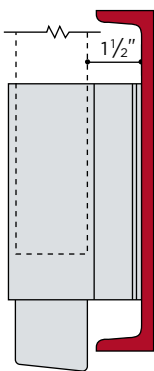


Fascia flange **426** used with channel stringer.

Fascia flange **422** is similar.

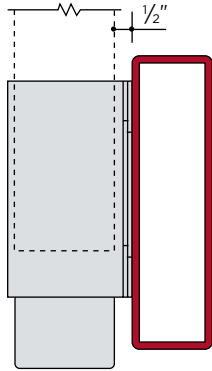


Fascia flange **408** used with box stringer.


Fascia flanges **421** and **425** are similar.

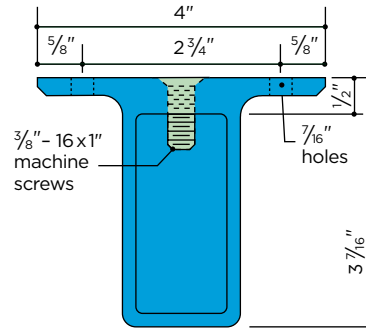


● **408** Aluminum  
Fits aluminum posts  
**424**, **6424**, **6434**

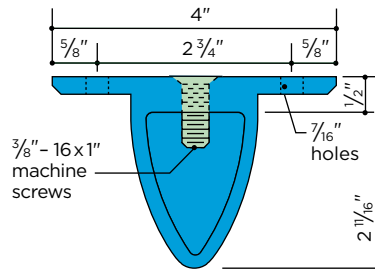


● **425** Aluminum  
Fits aluminum posts  
**427** and **6427**



● **426** Aluminum  
Fits aluminum posts  
**427** and **6427**

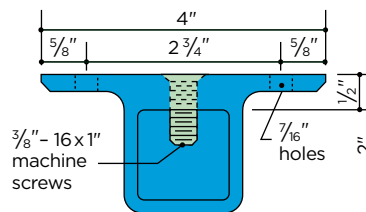

● **421** Aluminum  
Fits aluminum posts  
**423** and **6423**



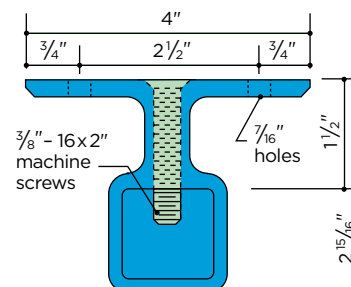


● **422** Aluminum  
Fits aluminum posts  
**423** and **6423**

**PRECUT POST**

For fascia mounting,  
51" lengths, Mill Finish

Aluminum 6063-T6  
Bronze C38500

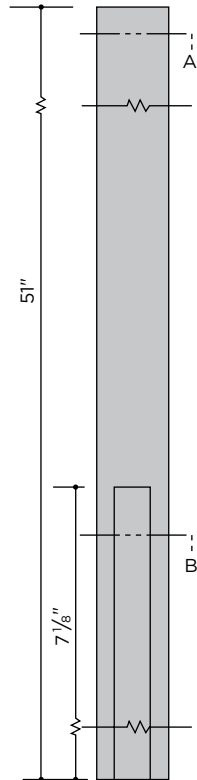

- **430\*** Aluminum
- **830\*** Bronze


\* Cut and machined for use with fascia brackets

430



**REINFORCING BARS**


Aluminum 6063-T6

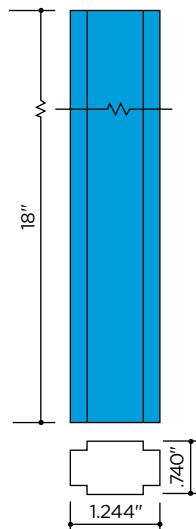

- **436E** Aluminum
- Fits posts **430** or **830**

**TUBING FOR FLOOR-MOUNTED POSTS**

20' lengths, Mill Finish




	lb/ft
● <b>6430</b> Aluminum	.899
● <b>4830</b> Bronze	2.950

Aluminum items are suitable for anodizing, including most of the hardcoat color finishes. Properties of sections for handrail posts are listed on page 123. Refer to pages 122-127 for detailed information on the structural design of handrail installations.


**COVER FLANGES**

Satin Finish

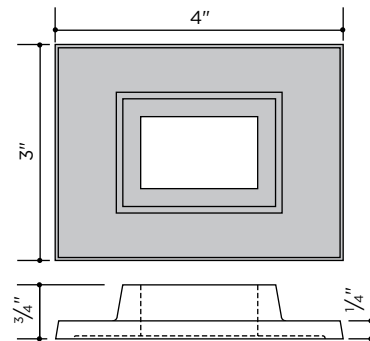

- **435** Aluminum
  - **835** Bronze
- Fits aluminum post **430** or **6430**  
Fits bronze post **830** or **4830**


**POST BRACKET ANCHOR PLUGS**

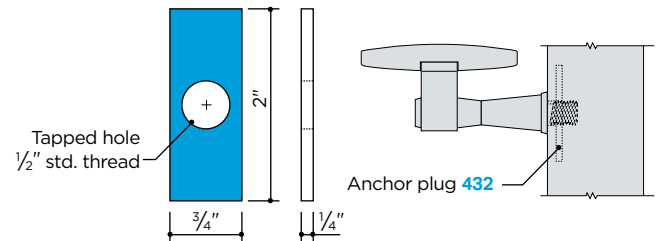

- **432** Aluminum
- Fits posts **430** and **830**

**Floor Mounted Post Detail**

Reinforcing bar is placed within mating hollow post. Post is set in metal sleeve in concrete and grouted. Embed post to a depth of 4" to 6" in slab. Allow for a 1" grout pad beneath post. Sleeve should provide ample clearance around post for grouting and to allow for adjustment to field variations. For outdoor installations, weep holes should be drilled in the posts to prevent water from collecting below ground level. A cover flange conceals the floor opening.

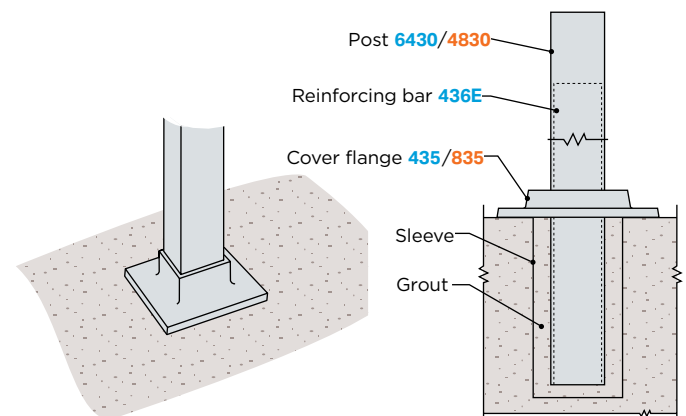


● ALUMINUM ● BRONZE ● STAINLESS

**FASCIA BRACKETS**

Mill Finish


Fascia brackets are available for concealed fastening of hollow posts of aluminum, bronze, and stainless steel—both for solid and channel fascias. The fastening mechanism provides for vertical field adjustment.

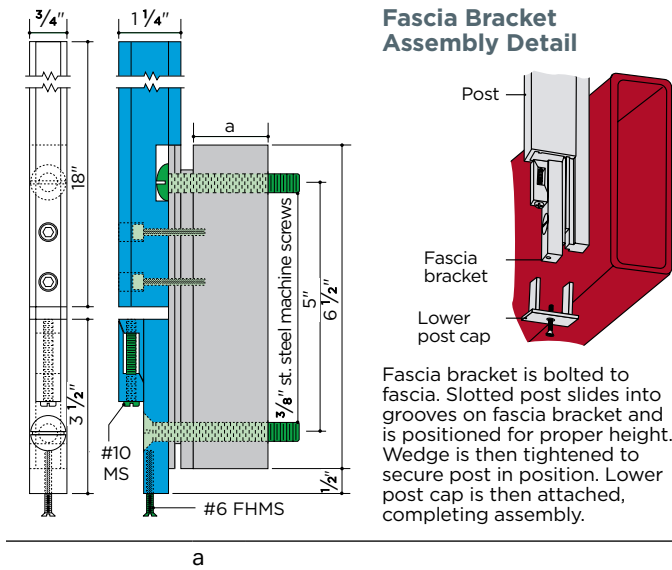


- 428** Aluminum 1/2" For box stringers, fits aluminum post **430**  
**429** Aluminum 1 1/2" For channel stringers, fits aluminum post **430**  
**838** Bronze 1/2" For box stringers, fits bronze post **830**  
**839** Bronze 1 1/2" For channel stringers, fits bronze post **830**

**CENTER POST BRACKETS**

Satin Finish

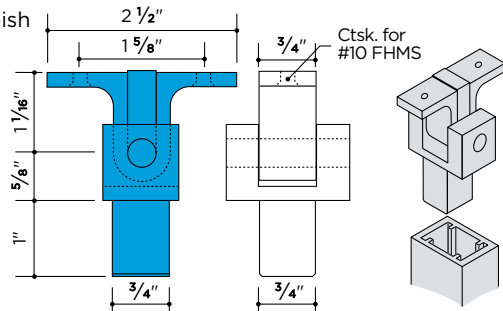

- 161** Aluminum Curved for pipe, fits aluminum posts **430** and **6430**  
**162** Aluminum Flat for moulding, fits aluminum posts **430** and **6430**

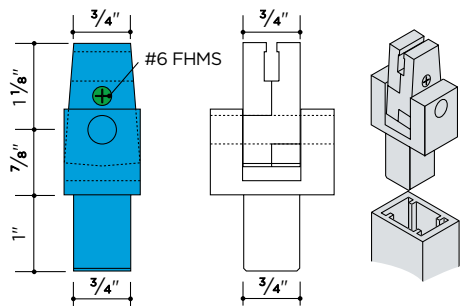


- 152** Alum. For Carlstadt® T-handrail, fits aluminum posts **430** and **6430**

Center post brackets permit handrail to be centered directly over post, while allowing the bracket to tilt to conform to stair incline. Bracket is secured to post with pin or screw.

**POST CAPS**

Satin Finish


Caps for hollow Carlstadt® posts have a flange extending inside to receive and support the thread of the bracket arm.

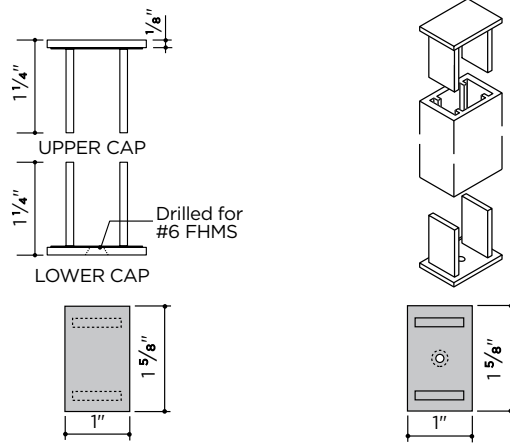

- Upper Cap**  
**431** Aluminum  
**831** Bronze
- Lower Cap**  
**433** Aluminum  
**833** Bronze

Fits aluminum posts **430** and **6430** and bronze posts **830** and **4830**

**POST ANCHOR FOR CAST STEPS**

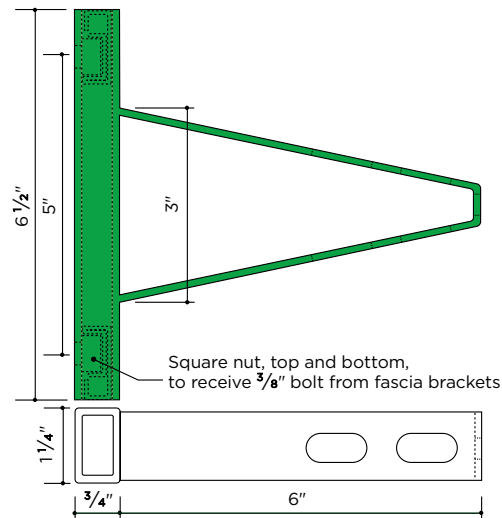


- 227** Stainless For use with aluminum and bronze railings

Post anchor **227** can be used with fascia brackets **428**, **429**, **838**, **839**, or to mount Carlstadt® aluminum or bronze posts. Cast post anchor into concrete with minimum slab thickness of 3" and minimum compressive strength of 3500 psi. Maximum recommended post spacing for 3" slabs is 30"; for slabs 4" thick and thicker, recommended maximum post spacing is 48".

**Post Anchor Installation**




Anchor is embedded in slab with anchor centered vertically in slab thickness. Front face of anchor should be flush with edge of slab. Square nuts move freely in pockets, and receive 3/8" mounting bolts of Carlstadt® fascia brackets. Wide slots provide for lateral adjustment and vertical alignment.



**PRECUT POST**

For fascia mounting,  
51" lengths, Mill Finish


Aluminum 6063-T6

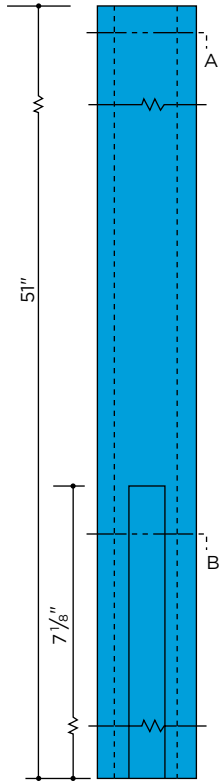

● **458\*** Aluminum


\* Cut and machined for use with fascia brackets

458



**REINFORCING BARS**

Aluminum 6063-T6

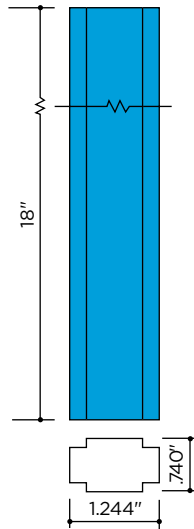


● **436E** Aluminum

Fits aluminum post **458**

**TUBING FOR FLOOR-MOUNTED POSTS**

20' lengths, Mill Finish




	lb/ft
● <b>645E</b> Aluminum	1.326

● **645E** Aluminum 1.326

Aluminum items are suitable for anodizing, including most of the hardcoat color finishes. Properties of sections for handrail posts are listed on page 123. Refer to pages 122-127 for detailed information on the structural design of handrail installations.

**COVER FLANGES**


Satin Finish

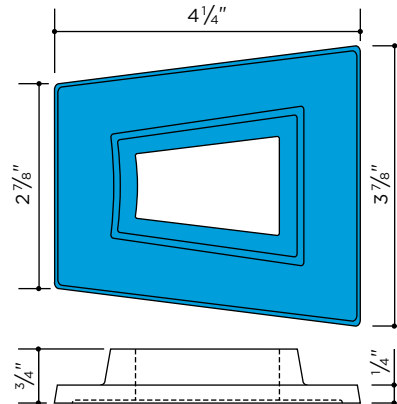

● **495** Aluminum

Fits aluminum post **458** or **645E**

**POST BRACKET ANCHOR PLUGS**

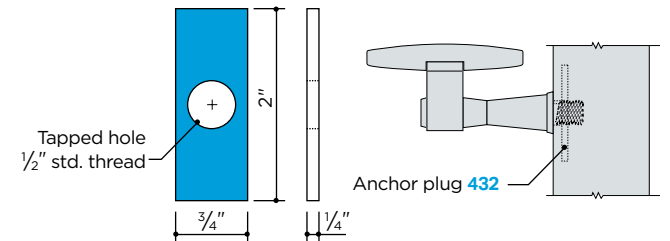


● **432** Aluminum

Fits aluminum post **458**

**Floor Mounted Post Detail**

Reinforcing bar is placed within mating hollow post. Post is set in metal sleeve in concrete and grouted. Embed post to a depth of 4" to 6" in slab. Allow for a 1" grout pad beneath post. Sleeve should provide ample clearance around post for grouting and to allow for adjustment to field variations. For outdoor installations, weep holes should be drilled in the posts to prevent water from collecting below ground level. A cover flange conceals the floor opening.

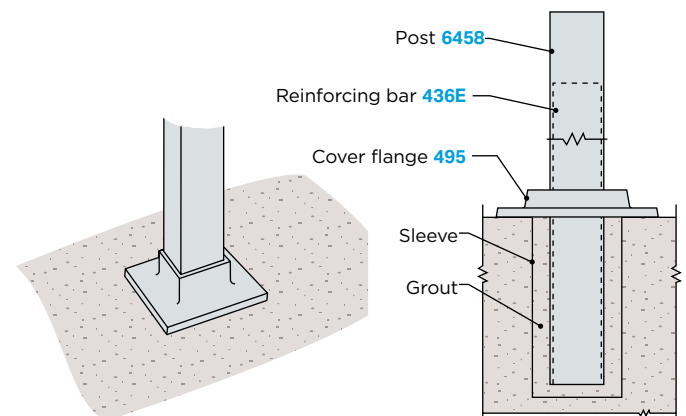


● ALUMINUM ● STAINLESS

**FASCIA BRACKETS**

Mill Finish


Fascia brackets are available for concealed fastening of hollow posts of aluminum, bronze, and stainless steel—both for solid and channel fascias. The fastening mechanism provides for vertical field adjustment.

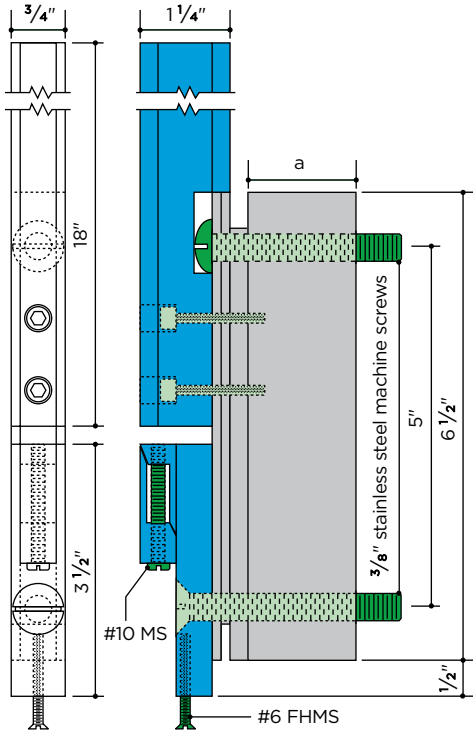

- **428** Aluminum 1/2" For box stringers, fits aluminum post **458**
- **429** Aluminum 1 1/2" For channel stringers, fits aluminum post **458**

**Fascia Bracket Assembly Detail**


Fascia bracket is bolted to fascia. Slotted post slides into grooves on fascia bracket and is positioned for proper height. Wedge is then tightened to secure post in position. Lower post cap is then attached, completing assembly.

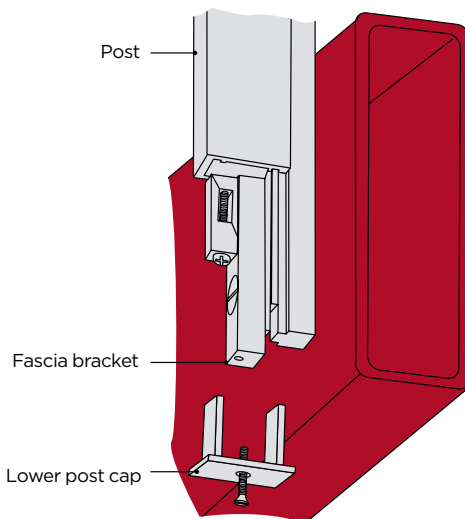

**POST CAPS**

Satin Finish

Caps for hollow Carlstadt® posts have a flange extending inside to receive and support the thread of the bracket arm.

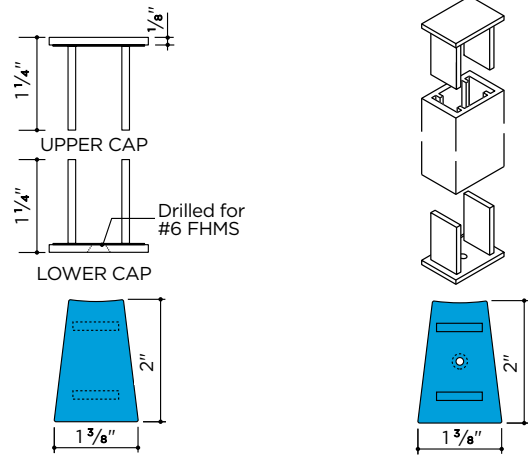


Upper Cap

- **468** Aluminum
- Fits aluminum posts **458** and **6458**

Lower Cap

- **469** Aluminum
- Fits aluminum posts **458** and **6458**

**POST ANCHOR FOR CAST STEPS**

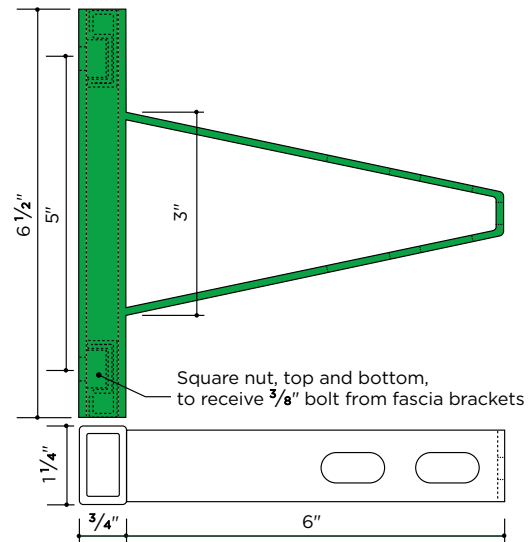


- **227** Stainless For use with aluminum and bronze railings

Post anchor **227** can be used with fascia brackets **428** and **429** to mount Carlstadt® aluminum or bronze posts. Cast post anchor into concrete with minimum slab thickness of 3" and minimum compressive strength of 3500 psi. Maximum recommended post spacing for 3" slabs is 30"; for slabs 4" thick and thicker, recommended maximum post spacing is 48".

**Post Anchor Installation**



Anchor is embedded in slab with anchor centered vertically in slab thickness. Front face of anchor should be flush with edge of slab. Square nuts move freely in pockets, receive 3/8" mounting bolts of Carlstadt® fascia brackets. Wide slots provide for lateral adjustment and vertical alignment.




**PRECUT POST**

For fascia mounting,  
51" lengths, Mill Finish

Aluminum 6063-T6

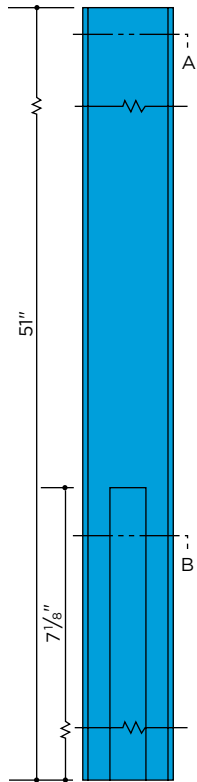

Section A




Section B

● **459\*** Aluminum


\* Cut and machined for use with fascia brackets

459



**REINFORCING BARS**

Aluminum 6063-T6

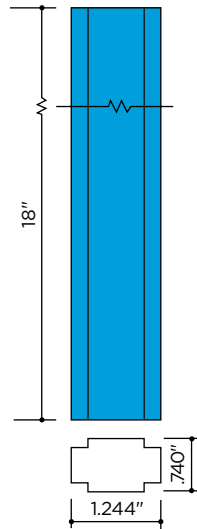


● **436E** Aluminum

Fits aluminum post **459**

**TUBING FOR FLOOR-MOUNTED POSTS**

20' lengths, Mill Finish




● **6459** Aluminum 1.240 lb/ft

Aluminum items are suitable for anodizing, including most of the hardcoat color finishes. Properties of sections for handrail posts are listed on page 123. Refer to pages 122-127 for detailed information on the structural design of handrail installations.

**COVER FLANGES**


Satin Finish

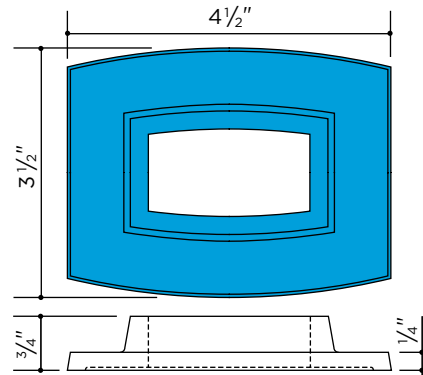

● **496** Aluminum

Fits aluminum post **459** or **6459**

**POST BRACKET ANCHOR PLUGS**

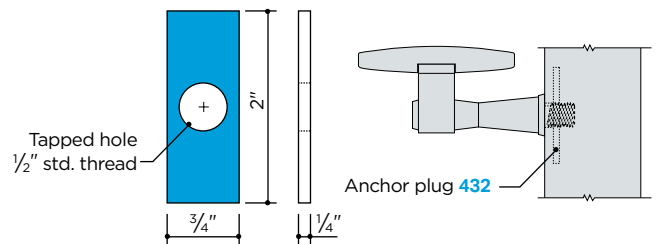


● **432** Aluminum

Fits aluminum post **459**

**Floor Mounted Post Detail**

Reinforcing bar is placed within mating hollow post. Post is set in metal sleeve in concrete and grouted. Embed post to a depth of 4" to 6" in slab. Allow for a 1" grout pad beneath post. Sleeve should provide ample clearance around post for grouting and to allow for adjustment to field variations. For outdoor installations, weep holes should be drilled in the posts to prevent water from collecting below ground level. A cover flange conceals the floor opening.

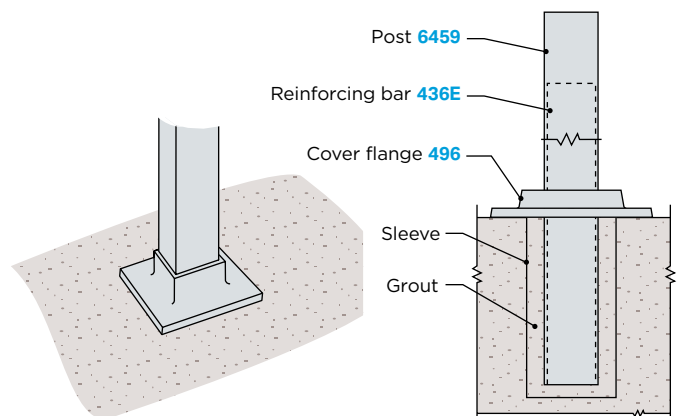


● ALUMINUM ● STAINLESS

**FASCIA BRACKETS**

Mill Finish


Fascia brackets are available for concealed fastening of hollow posts of aluminum, bronze, and stainless steel—both for solid and channel fascias. The fastening mechanism provides for vertical field adjustment.

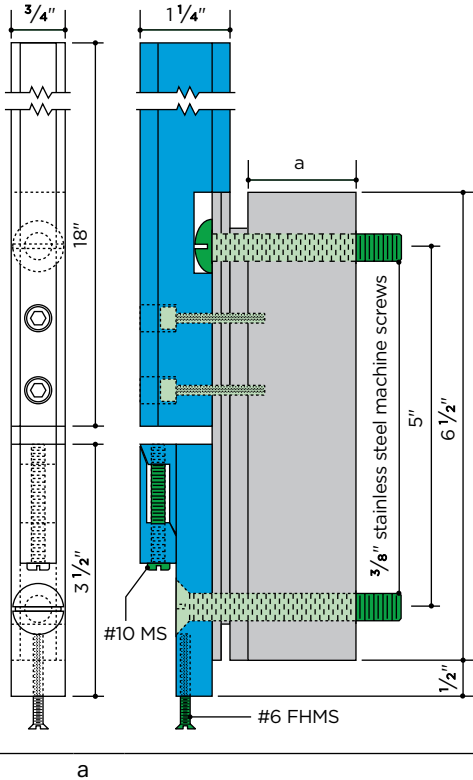

- **428** Aluminum 1/2" For box stringers, fits aluminum post **458**
- **429** Aluminum 1 1/2" For channel stringers, fits aluminum post **458**

**Fascia Bracket Assembly Detail**


Fascia bracket is bolted to fascia. Slotted post slides into grooves on fascia bracket and is positioned for proper height. Wedge is then tightened to secure post in position. Lower post cap is then attached, completing assembly.

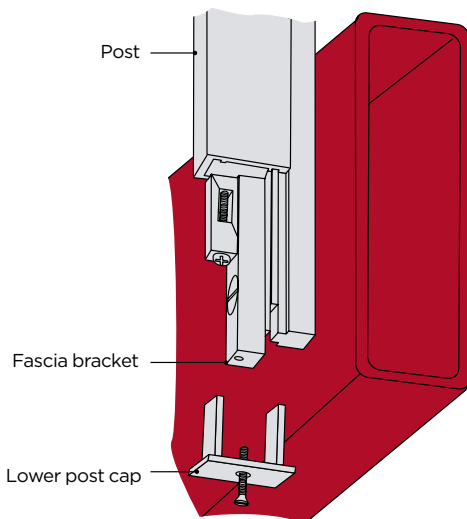

**POST CAPS**


Satin Finish

Caps for hollow Carlstadt® posts have a flange extending inside to receive and support the thread of the bracket arm.

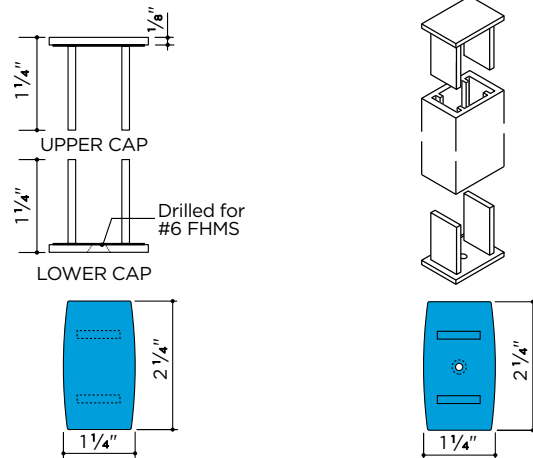

- Upper Cap**  
● **451** Aluminum  
Fits aluminum posts **459** and **6459**
- Lower Cap**  
● **453** Aluminum  
Fits aluminum posts **459** and **6459**

**POST ANCHOR FOR CAST STEPS**

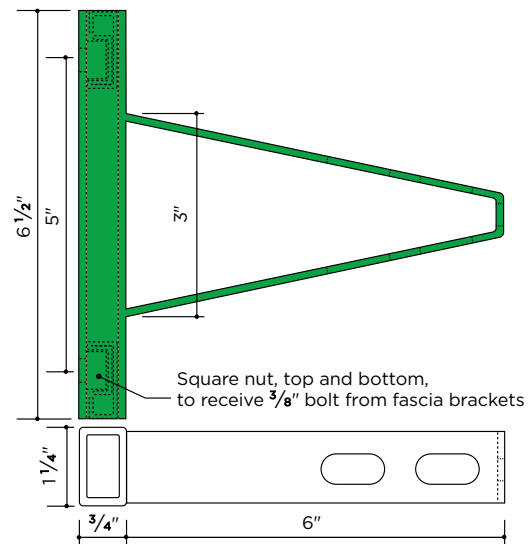


- **227** Stainless For use with aluminum and bronze railings

Post anchor **227** can be used with fascia brackets **428** and **429** to mount Carlstadt® aluminum or bronze posts. Cast post anchor into concrete with minimum slab thickness of 3" and minimum compressive strength of 3500 psi. Maximum recommended post spacing for 3" slabs is 30"; for slabs 4" thick and thicker, recommended maximum post spacing is 48".

**Post Anchor Installation**

Anchor is embedded in slab with anchor centered vertically in slab thickness. Front face of anchor should be flush with edge of slab. Square nuts move freely in pockets, receive 3/8" mounting bolts of Carlstadt® fascia brackets. Wide slots provide for lateral adjustment and vertical alignment.


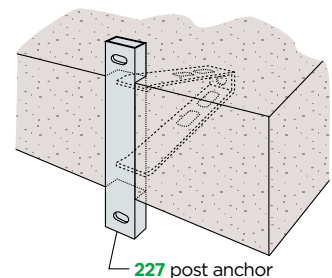


● ALUMINUM ● STAINLESS


**PRECUT POST**

For fascia mounting,  
51" lengths, 2B Mill Finish

Stainless Type 304

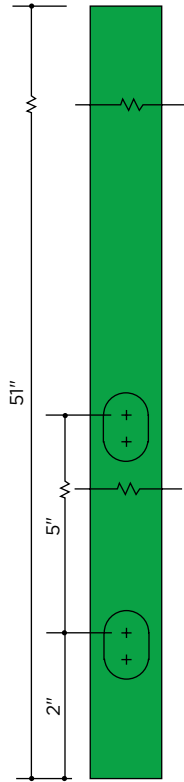

● **230\*** Stainless




● **280\*** Stainless

\* Cut and punched for fascia block

Properties of sections for handrail posts are listed on page 123. Refer to pages 122-127 for detailed information on the structural design of handrail installations.

**REINFORCING BARS**

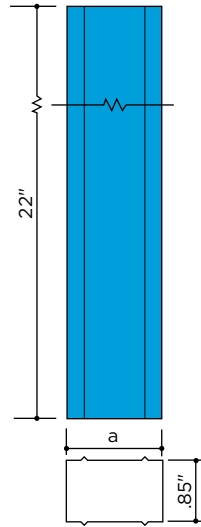

● **294** Aluminum 1.34"


Fits stainless post **230**

● **295** Aluminum 1.84"

Fits stainless post **280**

**TUBING FOR FLOOR-MOUNTED POSTS**


20' lengths, 2B Mill Finish



● Stainless Tubing

**COVER FLANGES**

Satin Finish

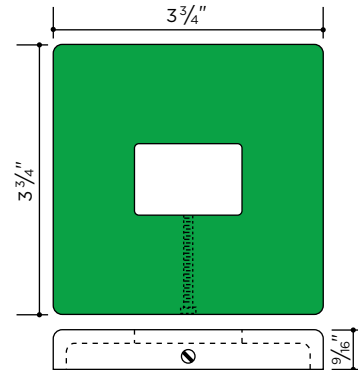


● **237** Stainless

Fits stainless post **230** or tubing

● **285** Stainless

Fits stainless post **280** or tubing


**POST BRACKET ANCHOR PLUGS**

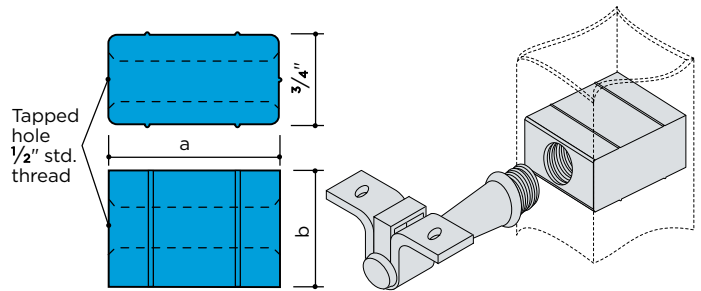

	a	b	
● <b>238</b> Aluminum	1.34"	1 1/8"	Fits with stainless post <b>230</b>
● <b>279</b> Aluminum	1.84"	1 1/4"	Fits with stainless post <b>280</b>

**Floor Mounted Post Detail**


Reinforcing bar is placed within mating hollow post. Post is set in metal sleeve in concrete and grouted. Embed post to a depth of 4" to 6" in slab. Allow for a 1" grout pad beneath post. Sleeve should provide ample clearance around post for grouting and to allow for adjustment to field variations. For outdoor installations, weep holes should be drilled in the posts to prevent water from collecting below ground level. A cover flange conceals the floor opening.

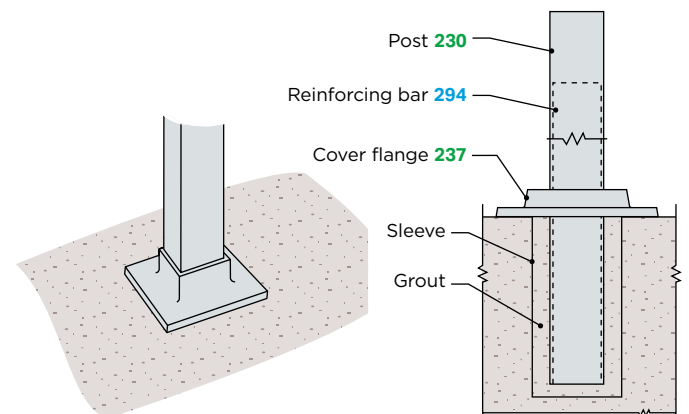

● ALUMINUM ● STAINLESS


**ANCHOR BAR WITH LOWER POST CAP**

Mill Finish

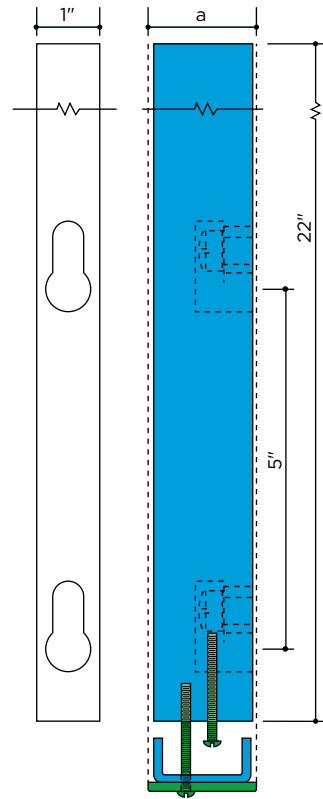

**FASCIA SPACER BLOCK**

Satin Finish

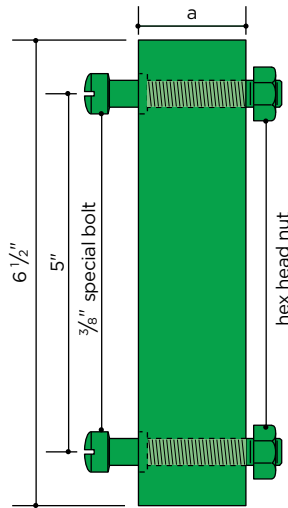


	a	post
● 233B Aluminum	1 1/2"	230
With stainless steel lower post cap *		
● 283 Aluminum	2"	280
With stainless steel lower post cap *		
* Satin Finish		

	a
● 228 Stainless	1 1/2"
Use with box stringers	
● 229 Stainless	1 1/2"
Use with channel stringers	



**Fascia Spacer Block Assembly**

The spacer block is first fastened to the stringer. The keyhole in the anchor bar aligns with the holes in the tubular post. Post and anchor bar assembly are then fed over the bolt heads, into the keyhole slot and seated manually. Final tightening is achieved by drawing up the tightening screw in the lower post cap.

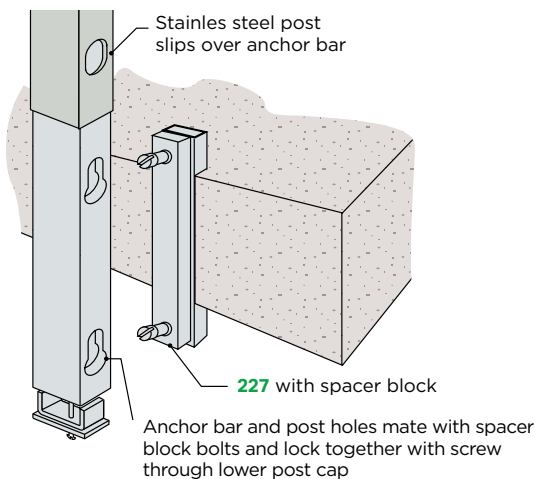


**UPPER POST CAP**

Satin Finish



Upper Cap	a	b	
● 231 Stainless	1 1/2"	1 1/4"	Fits stainless post 230
● 284 Stainless	2"	1 7/16"	Fits stainless post 280

**POST ANCHOR FOR CAST STEPS**

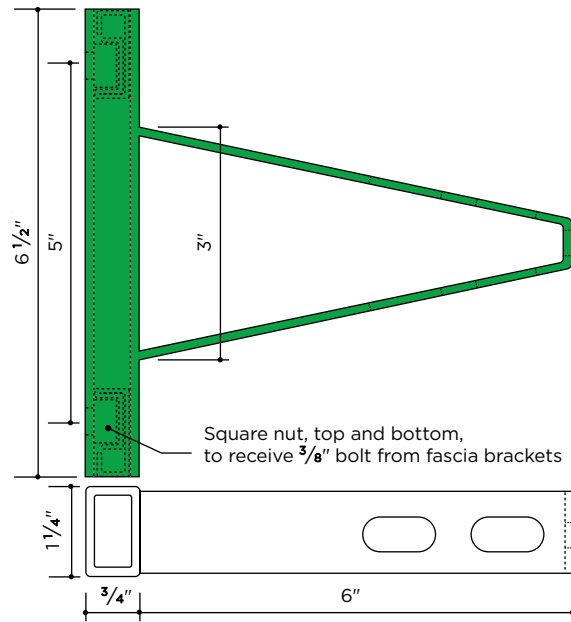


● 227 Stainless	For use with aluminum and bronze railings
-----------------	---

Post anchor 227 can be used with fascia brackets 228 and 229 to mount Carlstadt® aluminum or bronze posts. Cast post anchor into concrete with minimum slab thickness of 3" and minimum compressive strength of 3500 psi. Maximum recommended post spacing for 3" slabs is 30"; for slabs 4" thick and thicker, recommended maximum post spacing is 48".

**Post Anchor Installation**


Anchor is embedded in slab with anchor centered vertically in slab thickness. Front face of anchor should be flush with edge of slab. Square nuts move freely in pockets, receive 3/8" mounting bolts of Carlstadt® fascia brackets. Wide slots provide for lateral adjustment and vertical alignment.




**TUBING FOR RAILING POSTS**

Mill Finish

**Aluminum**  
6063-T6  
20' lengths

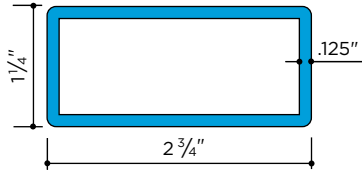


● <b>6434</b>	Aluminum	1.123 lb/ft	Fittings: N
---------------	----------	-------------	-------------



● <b>6435</b>	Aluminum	1.075 lb/ft	Fittings: N
---------------	----------	-------------	-------------


**Nickel-Silver**  
C79800  
16' lengths

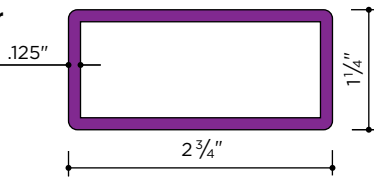

● <b>1334</b>	Nickel-Silver	3.40 lb/ft	Fittings: N
---------------	---------------	------------	-------------

**HIGH STRENGTH CONNECTORAIL® POSTS**

Aluminum only, Alloy 6063-T832




Drawn pipe precut to post lengths.  
Clear anodized or mill finish

	Pipe	Sched.	Length	c	t
● <b>7103</b>	Aluminum	1 1/4"	38"	1.660"	.109"
● <b>7104</b>	Aluminum	1 1/4"	50"	1.660"	.109"
● <b>7403</b>	Aluminum	1 1/4"	38"	1.660"	.140"
● <b>7404</b>	Aluminum	1 1/4"	50"	1.660"	.140"
● <b>7203</b>	Aluminum	1 1/2"	38"	1.900"	.109"
● <b>7204</b>	Aluminum	1 1/2"	50"	1.900"	.109"
● <b>7503</b>	Aluminum	1 1/2"	38"	1.900"	.145"
● <b>7504</b>	Aluminum	1 1/2"	50"	1.900"	.145"

**DRAWN ALUMINUM HANDRAIL PIPE**

Aluminum Alloy 6063-T832, 20' lengths




Nominal Size	Sched.	OD	ID	t	lb/ft
1 1/4"	10	1.660"	1.442"	.109"	.625
1 1/4"	40	1.660"	1.380"	.140"	.785
1 1/2"	10	1.900"	1.682"	.109"	.721
1 1/2"	40	1.900"	1.610"	.145"	.940

This premium quality drawn pipe has an extra smooth surface. Its harder temper gives it high strength. See pages 16-27 for stock pipe fittings. Available in clear anodized or mill finish.

● ALUMINUM ● NICKEL-SILVER ● STAINLESS

**PIPE ANCHOR PLUGS**

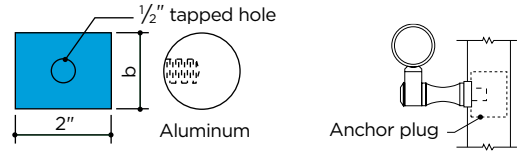


	Pipe	Sched.	b
● <b>7162</b>	Aluminum	1 1/4"	1.427"
● <b>7462</b>	Aluminum	1 1/4"	1.360"
● <b>7262</b>	Aluminum	1 1/2"	1.667"
● <b>7562</b>	Aluminum	1 1/2"	1.585"
● <b>9362</b>	Stainless	1 1/2"	1.750"


Anchor plugs provide secure mounting for brackets supporting second or third rails. Aluminum anchor plugs are machined from solid extruded stock; the stainless steel anchor plug is fabricated from heavy metal.

**COVER FLANGES**


Satin Finish

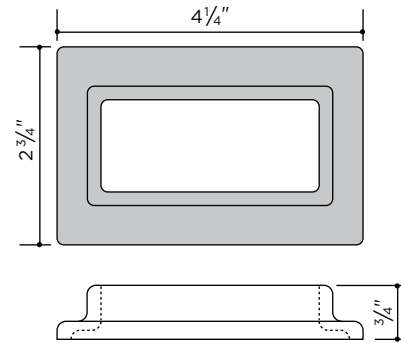

● <b>774</b>	Aluminum	Fits posts <b>424, 6424, and 6434</b>
● <b>1374</b>	Nickel-Silver	Fits Nickel-Silver post <b>1334</b>

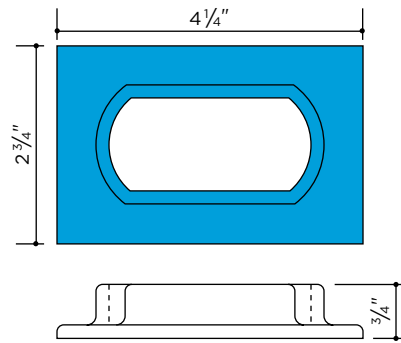

● <b>775</b>	Aluminum	Fits aluminum post <b>6435</b>
--------------	----------	--------------------------------

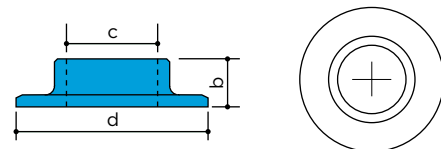

	Pipe	b	c	d
● <b>710*</b>	Aluminum	1 1/4"	1.688"	3 13/16"
● <b>711*</b>	Aluminum	1 1/2"	1.938"	4"


\* Also available in clear anodized AA-M32-C22-A31 (204R1)

● ALUMINUM ● NICKEL-SILVER

**FASCIA FLANGES**


Mill Finish

Sleeve-type fascia flanges are provided for mounting on solid or channel fascias and stringers. The post slips into the pocket of the fascia flange and is anchored with concealed set screws. The bottom extension of each fascia flange matches the profile of the post and is trimmed to match its top.

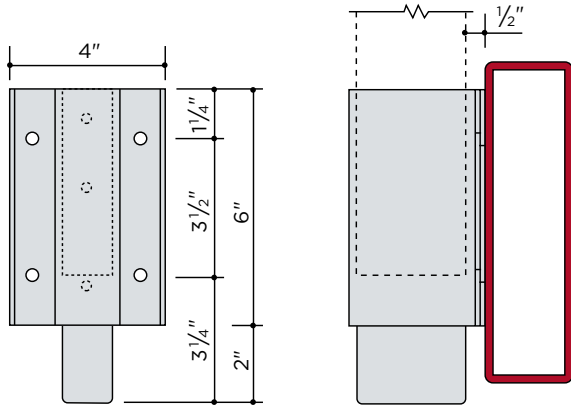

Elevation of **408**


Fascia flange **408** used with box stringer.

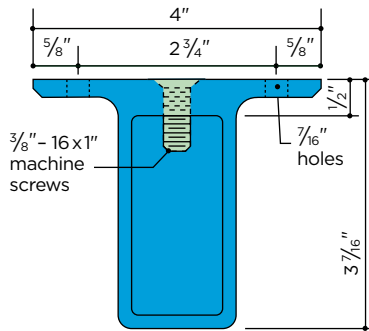

● **408** Aluminum

Fits aluminum post **6434**


See page 71 for a complete range of Carlstadt® fascia flanges.

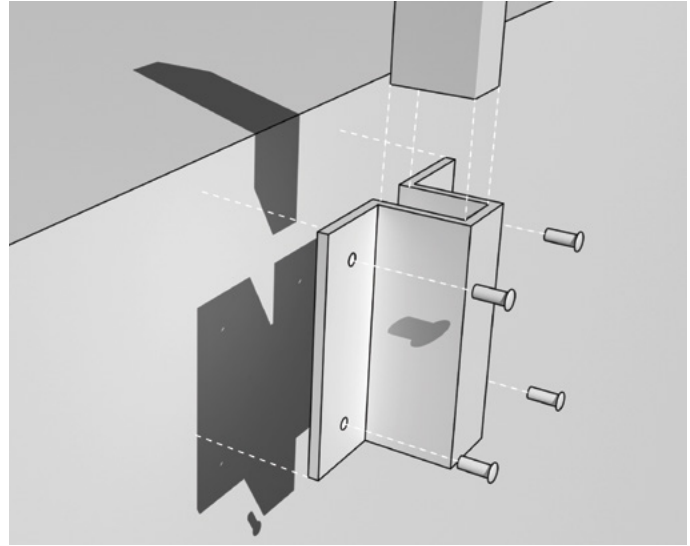


**POST CAPS**

Satin Finish, except as noted


Caps for hollow Carlstadt® posts have a flange extending inside to receive and support the thread of the bracket arm.

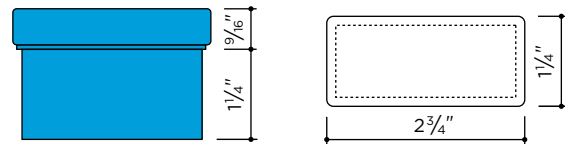


● **6434N** Aluminum

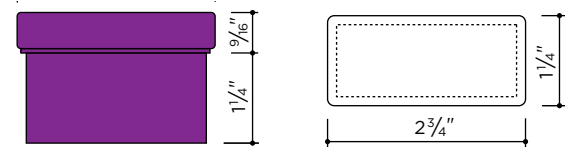

● **1334N** Nickel-Silver

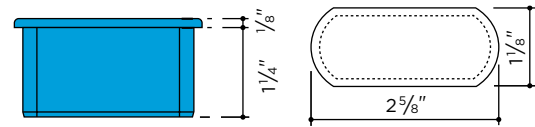


● **6435N** Aluminum



	Pipe	Sched.	c
● <b>7180*</b>	Aluminum 1 1/4"	10	1.660"
● <b>7480*</b>	Aluminum 1 1/4"	40	1.660"
● <b>7280*</b>	Aluminum 1 1/2"	10	1.900"
● <b>7580*</b>	Aluminum 1 1/2"	40	1.900"

\*Clear anodized AA-M32-C22-A31 (204R1)


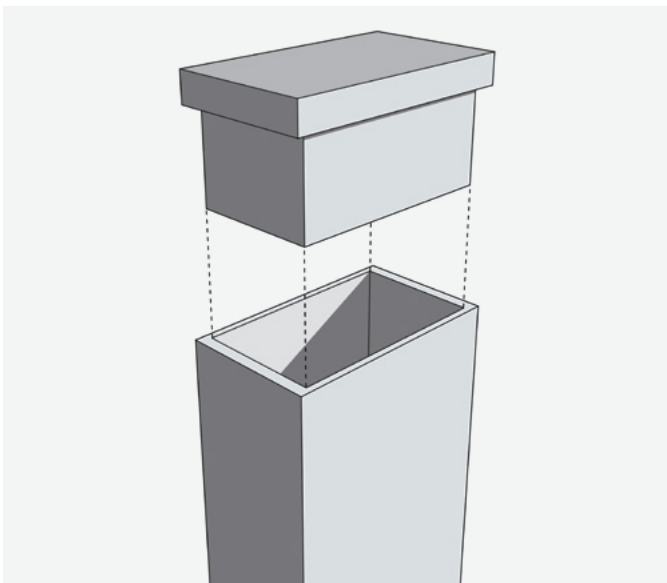


CARLSTADT®  
RAILINGS




● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STAINLESS

**SELF-ALIGNING**

Satin Finish


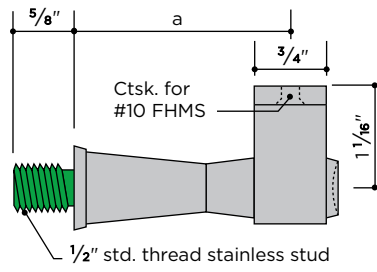


	a	b
● 441 Aluminum	2 1/4"	1 5/8"
● 442 Aluminum	2 3/4"	1 5/8"
● 841 Bronze	2 1/4"	1 5/8"
● 1341 Nickel-Silver	2 1/4"	1 5/8"
● 241 Stainless	2 1/4"	1 13/16"

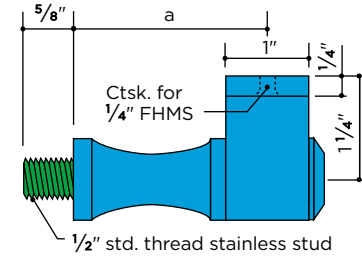



For use with Carlstadt® handrail moulding

	a
● 309 Aluminum	3 1/4"
● 312 Aluminum	2 3/8"

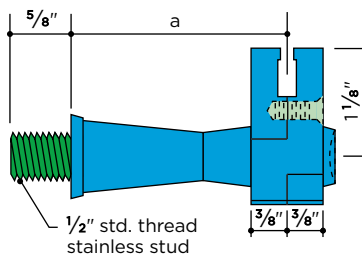

For use with Carlstadt® T-handrail moulding

	a
● 439 Aluminum	2 1/4"
● 440 Aluminum	2 3/4"

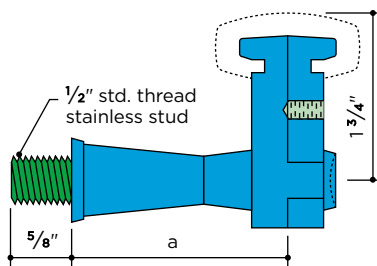


For use with Carlsrail® handrail moulding

	a
● 171 Aluminum	2 1/4"
● 172 Aluminum	2 3/4"

**POST BRACKET ADAPTER**

Satin Finish

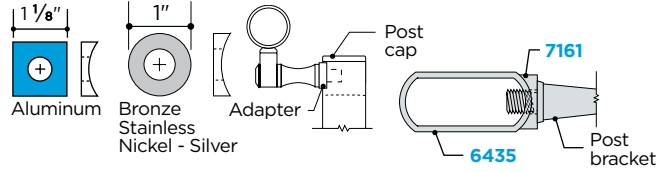


	Pipe Size	Schedule	Clear Hole
● 7161* Aluminum	1 1/4"	all	1/2"
● 7261* Aluminum	1 1/2"	all	1/2"
● 8661 Bronze	1 1/4"	all	1/2"
● 8861 Bronze	1 1/2"	all	1/2"
● 1361 Nickel-Silver	1 1/2"	all	1/2"
● 9161 Stainless	1 1/4"	all	1/2"
● 9361 Stainless	1 1/2"	all	1/2"

\* Also available in clear anodized AA-M10-C22-A31 (204R1)

**POST BRACKET EXTENSIONS**

Satin Finish

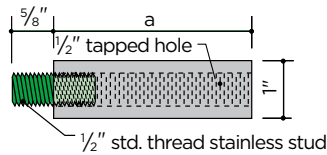


Designers should note that extending a bracket increases stress at its base and reduces its allowable load.


Post	a
● 462* Aluminum	1 3/4"
● 463* Aluminum	3"
● 862 Bronze	1 3/4"
● 863 Bronze	3"
● 1362 Nickel-Silver	1 3/4"
● 1366 Nickel-Silver	3"
● 245 Stainless	1 3/4"
● 246 Stainless	3"

Extensions may be cut to length to suit individual conditions.  
\* Also available in clear anodized AA-M10-C22-A31 (204R1)

**POST BRACKET ANCHOR PLUGS**

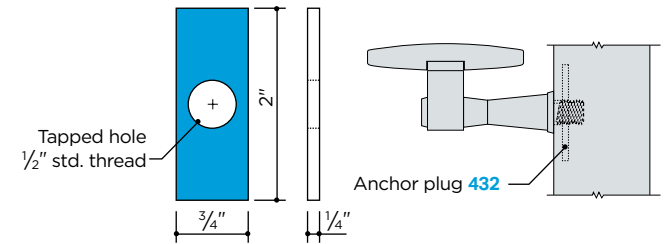

● 432 Aluminum	Fits with posts 430, 458, 459, and 830
----------------	--

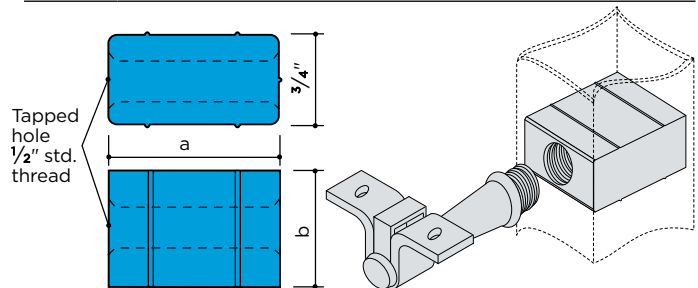


	a	b	
● 238 Aluminum	1.34"	1 1/8"	Fits with stainless post 230
● 279 Aluminum	1.84"	1 1/4"	Fits with stainless post 280

For Pipe Post Anchor Plugs, see page 22.


● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STAINLESS

**SELF-ALIGNING WALL BRACKETS**

Satin Finish

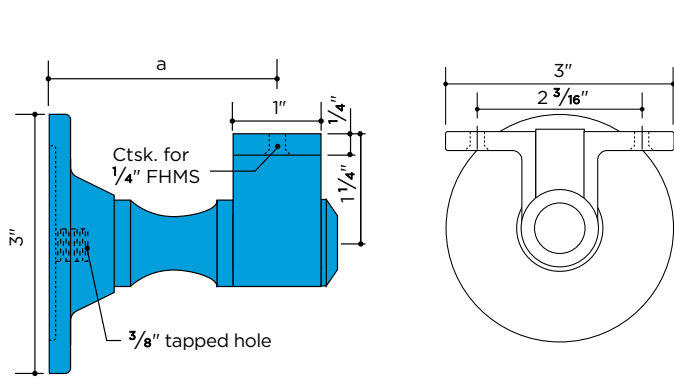


For use with Carlstadt® handrail moulding		a
● 313	Aluminum	2 5/8"
● 314	Aluminum	3 1/8"

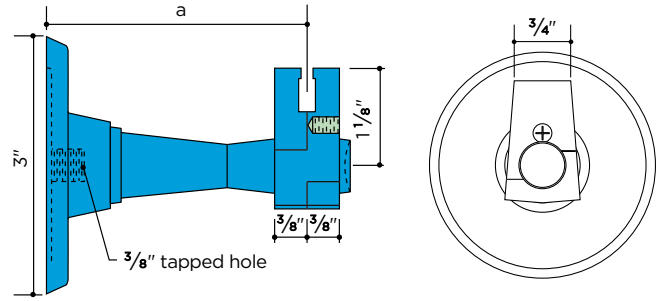

For use with Carlstadt® T-handrail moulding		a
● 418	Aluminum	3"
● 419	Aluminum	3 1/2"


**WALL BRACKET EXTENSIONS**

Satin Finish

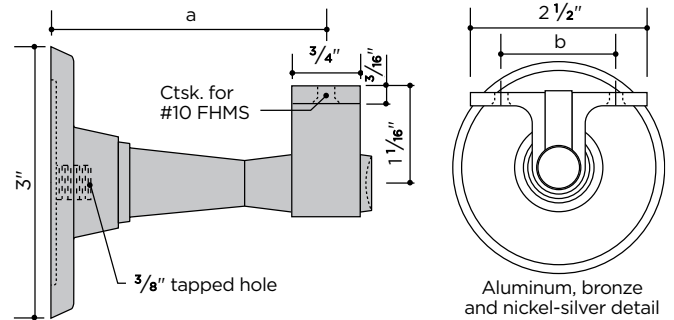


	a	b	
● 443	Aluminum	3"	1 5/8"
● 444	Aluminum	3 1/2"	1 5/8"
● 844	Bronze	2 1/2"	1 5/8"
● 843	Bronze	3"	1 5/8"
● 1343	Nickel-Silver	3"	1 5/8"
● 271	Stainless	2 1/4"	1 13/16"
● 243	Stainless	3"	1 13/16"

Aluminum, bronze and nickel-silver detail



Stainless detail

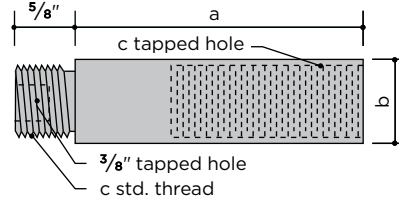



Designers should note that extending a bracket increases stress at its base and reduces its allowable load.

	a	b	c	
● 414*†	Aluminum	1 3/4"	1 1/8"	7/8"
● 415*†	Aluminum	3"	1 1/8"	7/8"
● 464	Aluminum	1 3/4"	1"	3/4"
● 465	Aluminum	3"	1"	3/4"
● 864	Bronze	1 3/4"	1"	3/4"
● 865	Bronze	3"	1"	3/4"
● 1364	Nickel-Silver	1 3/4"	1"	3/4"
● 1365	Nickel-Silver	3"	1"	3/4"
● 247	Stainless	1 3/4"	1"	3/4"
● 248	Stainless	3"	1"	3/4"

Extensions may be cut to length to suit individual conditions.  
 \* Also available in clear anodized AA-M10-C22-A31 (204R1)  
 † For use with 307, 308, 313, and 314 wall brackets.

**Adjustable Bracket Detail**

Post and upper post caps must be drilled and tapped to accept bracket arm. Recess of bracket arm has flat sides to accommodate wrench. Recess of bracket arm has flat sides to accommodate wrench, which permits tightening without marring exposed surfaces. Handrail flange tilts to adjust to stair angle and is attached to handrail with machine screws. Pressure on tightening block prevents looseness and rattling.

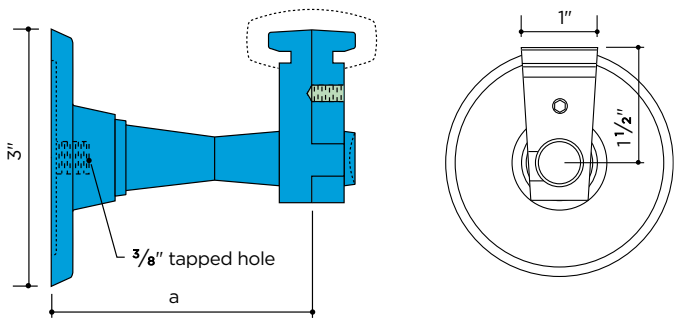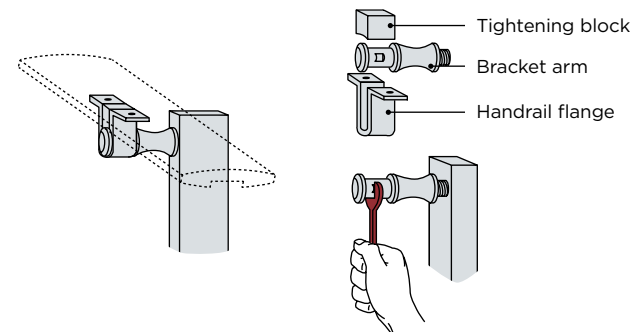


For use with Carlsrail® handrail moulding		a
● 175	Aluminum	2 1/4"
● 173	Aluminum	3"
● 174	Aluminum	3 1/2"



● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STAINLESS

**TWO-PIECE MOUNTING BRACKETS**


Satin Finish

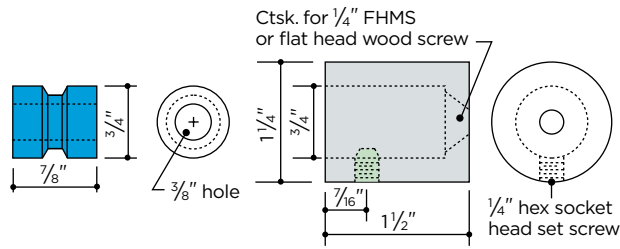

- 166\* Aluminum
- 896 Bronze
- 196 Nickel-Silver
- 296 Stainless

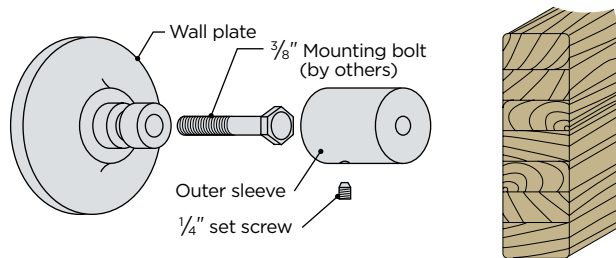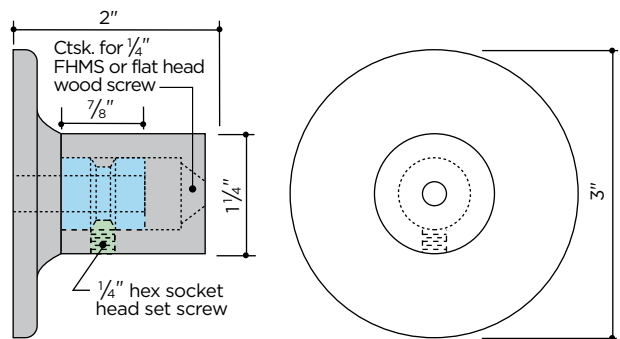

- 168\* Aluminum
- 898 Bronze
- 298 Stainless

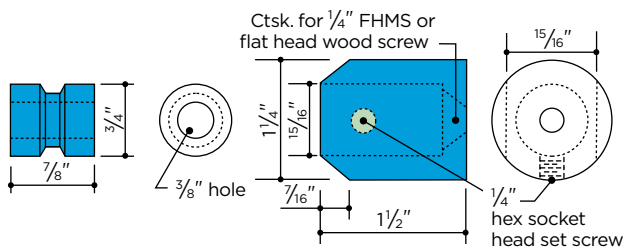


- 167 Aluminum Tapered


**TWO-PIECE MOUNTING BRACKETS**

Satin Finish


For wide wood handrails or metal handrails

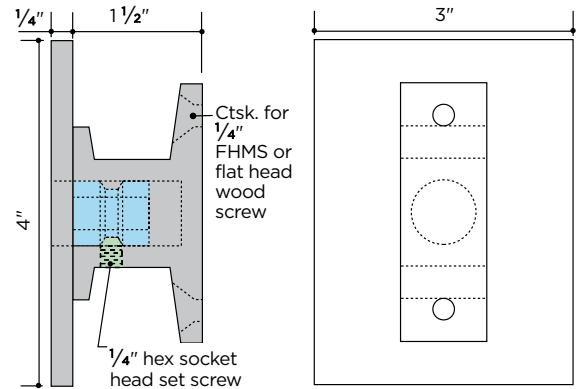


- 160\* Aluminum
- 890 Bronze
- 290 Stainless

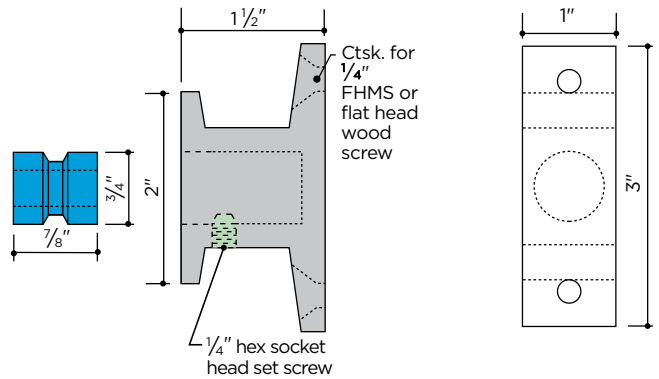

- 169\* Aluminum
- 899 Bronze
- 299 Stainless

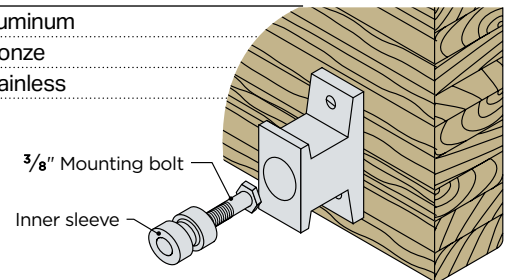

**ADAPTERS**

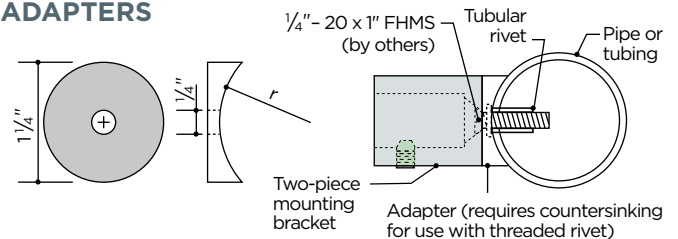


	r	Use With
● 7164* Aluminum	.830"	1.660" OD
● 7264* Aluminum	.950"	1.900" OD
● 8864 Bronze	.950"	1.900" OD
● 8964 Bronze	.750"	1.500" OD
● 5264 Nickel-Silver	.750"	1.500" OD
● 5364 Nickel-Silver	.950"	1.900" OD
● 9164 Stainless	.830"	1.660" OD
● 9364 Stainless	.950"	1.900" OD

\* Also available in clear anodized AA-M32-C22-A31 (204R1)

● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STAINLESS ● STEEL

**VERTICAL MOUNTING BRACKET**

Satin Finish

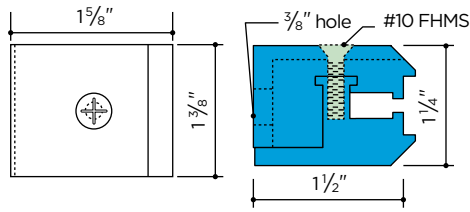


● **151\*** Aluminum

\* Also available in clear anodized AA-M10-C22-A31 (204R1)


Vertical mounting bracket **151** is designed for mounting handrail on edge to provide a wall guard or bumper. Carlstadt® T-handrail mouldings **6402**, **6405**, or **6407** can be mounted without drilling and tapping. Bracket is also suitable for mounting handrail on top of a parapet or wall.

**Assembly Detail**

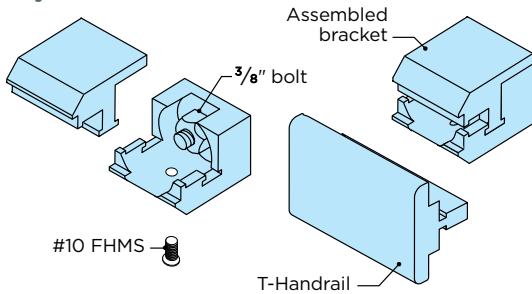


Use 3/8" machine screw, stud or hex head bolt for fastening to wall.

**Installation Details**

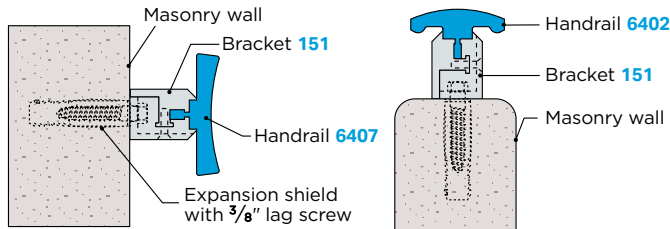


**THREADED BUSHING BRACKETS**


Satin Finish

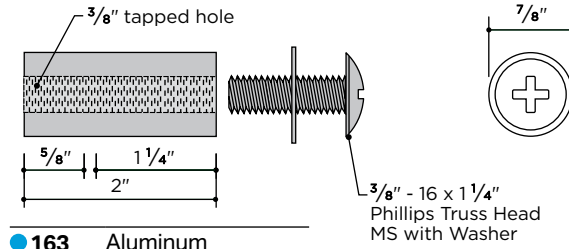

● **163** Aluminum  
● **63** Stainless

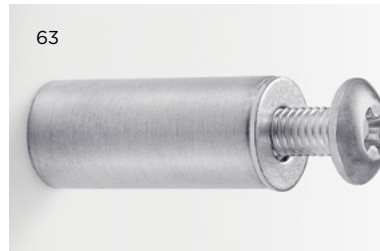

**Installation Details**

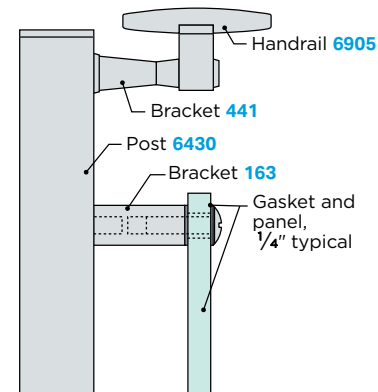

Threaded Bushing Brackets are used with threaded studs, machine screws, or bolts to install handrails or panels. Brackets may be cut to length as required. Brackets are furnished with aluminum Phillips Truss Head machine screws and washers.

**BOLTS AND ANCHORS** for handrail wall brackets

**Hanger Bolt**

● Steel 3/8" x 3"

**Hex Head Lag Screw**



● Aluminum 3/8" x 2"  
● Brass 3/8" x 2" (Plain or Finished)  
● Nickel-Silver 3/8" x 2" (Finished)  
● Stainless 3/8" x 2"

**Post Bracket Hanger Bolt**


● Steel 5/16" x 1 1/2" / 1/2" - 13 x 3/8"

**Heavy-Duty Double Machine Bolt Anchor** (Zinc Alloy)

Non-calking machine bolt anchor for use in masonry materials of questionable strength or where heavy shear loads are encountered. Thread accommodates 3/8" - 16 stud or machine bolt (supplied by others). Drill hole size of 3/4" diameter by 2 1/4" deep.

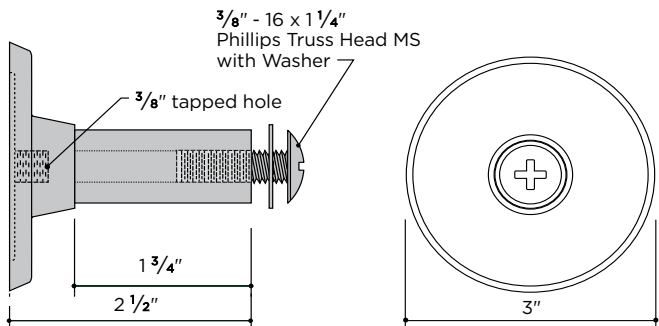


● **164** Aluminum  
● **64** Stainless

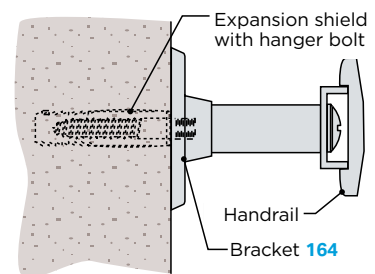


**CENTER POST BRACKETS**

Satin Finish, except as noted

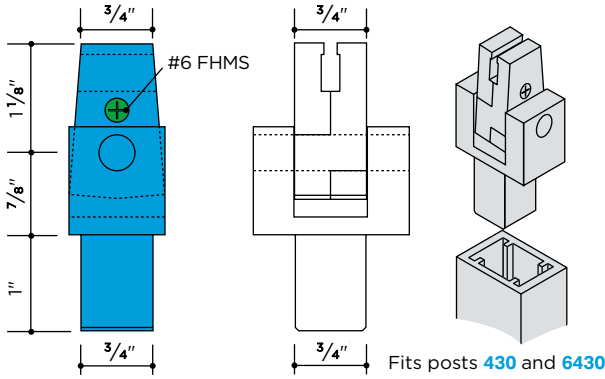


Center post brackets permit handrail to be centered directly over post, yet allow it to tilt to conform to stair incline. Bracket is secured to post with pin or screw.

● 152 Aluminum for Carlstadt® T-handrail moulding

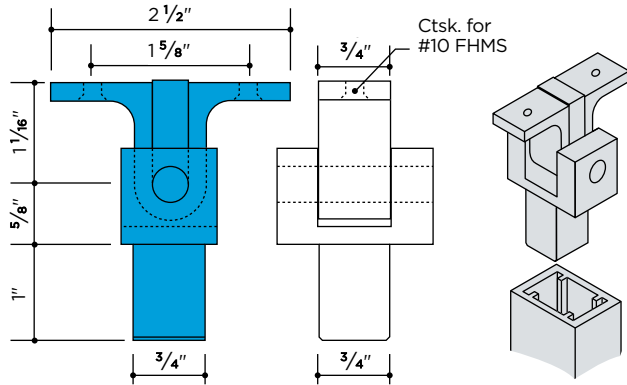

● 161 Aluminum Curved for pipe, fits posts 430 and 6430  
 ● 162 Aluminum Flat for moulding, fits posts 430 and 6430

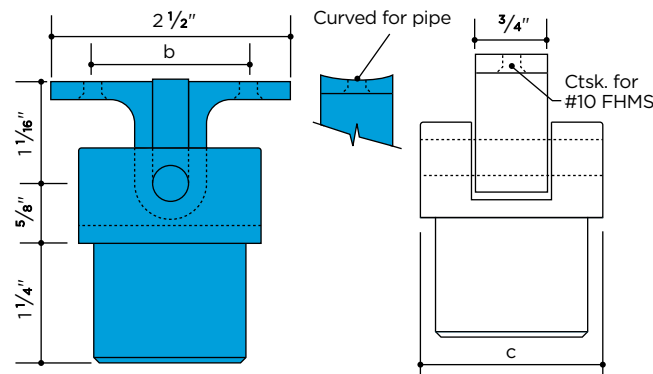


For center mounting of flat-bottomed handrail onto aluminum Connectorail® posts

Flat	Pipe	Sched.	c	b
● 144	Aluminum 1 1/4"	40	1.660"	1 5/8"
● 145	Aluminum 1 1/2"	40	1.900"	1 5/8"

For center mounting of pipe or rounded handrail onto aluminum Connectorail® posts


Curved	Pipe	Sched.	c	b
● 142*	Aluminum 1 1/4"	40	1.660"	1 5/8"
● 143*	Aluminum 1 1/2"	40	1.900"	1 5/8"

\* Also available in clear anodized AA-M10-C22-A31 (204R1)

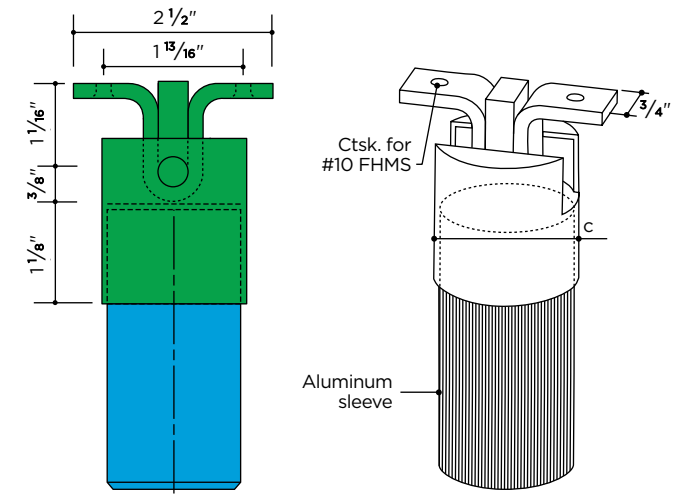

For center mounting of flat-bottomed handrail moulding onto stainless Connectorail® posts

Flat	Pipe	Sched.	c
● 207	Stainless Steel 1 1/2"	5	1.900"

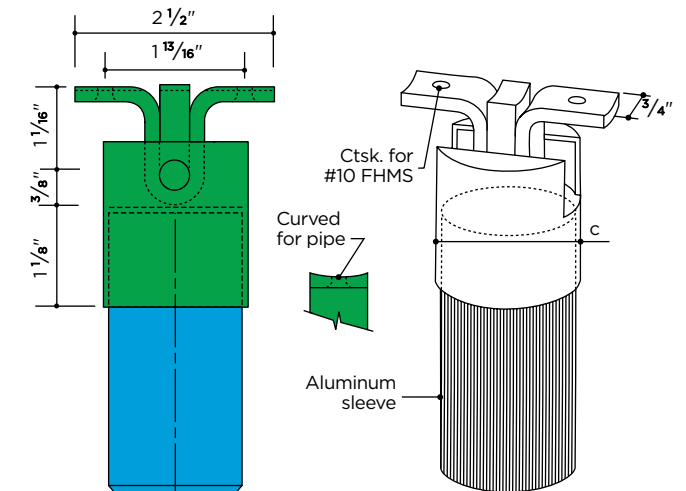


For center mounting of handrail pipe or rounded handrail onto stainless Connectorail® posts

Curved	Pipe	Sched.	c
● 208	Stainless Steel 1 1/2"	5	1.900"

● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STAINLESS


**PANEL CLIPS**

For aluminum pipe only, Mill Finish or Clear Anodized

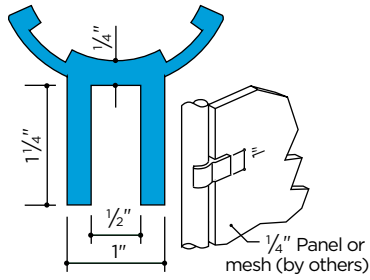

	Pipe
● 7460-5*	Aluminum 1 1/4"
● 7460†	Aluminum 1 1/4"
● 7560-5*	Aluminum 1 1/2"
● 7560†	Aluminum 1 1/2"



\* 5' Length  
† Packages of 4 pieces



	Pipe
● 7260**	Aluminum 1 1/2"

Packages of 4 sets. \*\* Two-piece assembly





For mounting to flat surface, Satin Finish

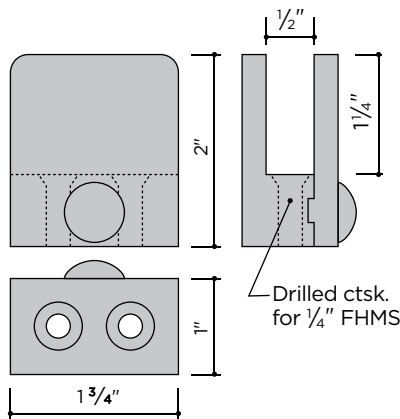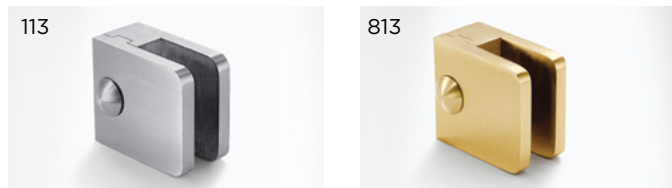

● 113	Aluminum	● 413	Nickel-Silver
● 813	Bronze	● 213	Stainless

Plug (packed separately) is inserted following installation and may be held in place with epoxy or other sealant.

**Installation Detail**

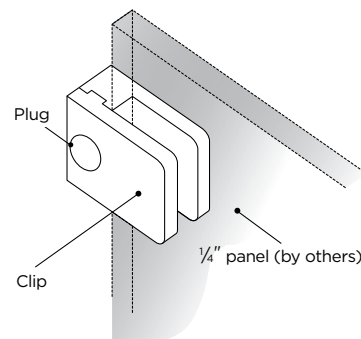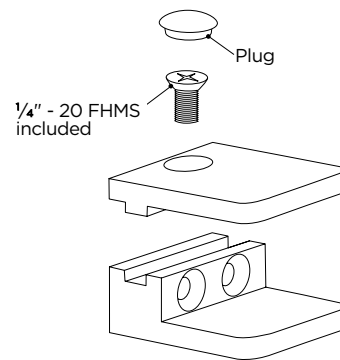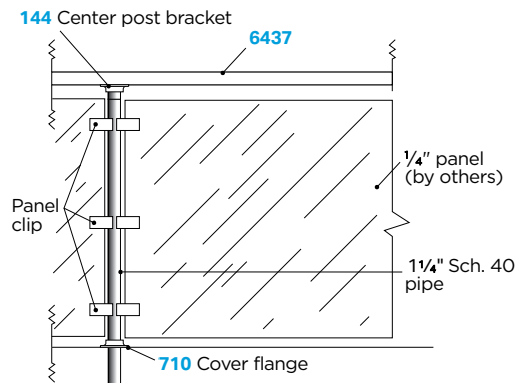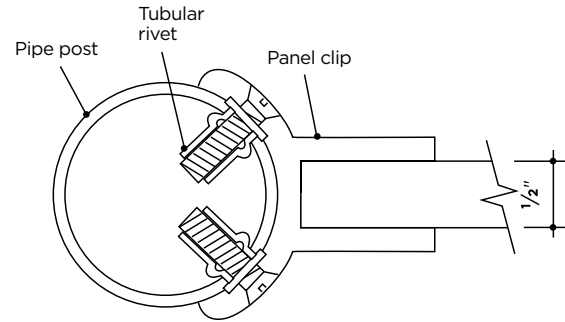

# HANDRAIL BRACKETS

Turtle Back Zoo, West Orange, NJ, Bismark Construction Corp., Newark, NJ (Fabricator), USA Architects (Architect), Planner and Interior Designers, Somerville, NJ (Designers).

For convenience and ease of reference, all of the handrail brackets that appear in various sections of our catalog are brought together in this section. **Included are brackets for wall, post, center rail and vertical mounting; for use with moulding or flat bars; for pipe railings; and for specific applications.**

- **Aluminum:** Cast brackets are made of high-strength alloy Almag 35—suitable for clear anodizing. Extruded and machined brackets are of alloy 6063—suitable for anodizing, including most of the hard coat anodic processes (black anodizing may result in inconsistent matches; consult your anodizer before specifying). **All, except as noted, are satin finished.** Pipe rail brackets are stocked with a clear anodized finish—AA-M32-C22-A31 (204R1)—as well as plain. Aluminum brackets cover a wide range of applications, including wall- and post-mounted brackets, brackets for center rails, and brackets for vertical mounting of rails or panels.
- **Bronze:** Cast brackets are made of alloy C86500 for close color match with extruded architectural bronze C38500 and red brass C23000. Extruded and machined brackets are of C38500. All, except as noted, are satin finished and lacquered.
- **Nickel-Silver:** Cast brackets closely match extruded nickel-silver handrails. Extruded and machined brackets are of alloy C79800. All, except as noted, are satin finished and lacquered.

- **Stainless Steel:** Brackets are made of 18-8 chrome-nickel alloy, stainless type 304, for high corrosion resistance. All, except as noted, are satin finished.
- **Malleable Iron and Stamped Steel:** All types are stocked with flat top member for mouldings and with curved top member for pipe rails. They may be welded or mechanically fastened to the rail. Pipe rail brackets are supplied galvanized as well as plain.
- **Titanium:** Silver-gray and softly reflective in appearance, titanium is a non-reactive metal and can be combined with bronze, aluminum, steel, or stainless handrails. Eco-friendly and low maintenance, it has outstanding corrosion resistance and requires no additional finishing. Because of its high strength, Julius Blum & Co., Inc. is able to design thinner and lighter handrail brackets.

**Julius Blum & Co., Inc.'s handrail brackets have been designed to meet or exceed accepted safety standards and have been laboratory tested. Test results are available upon request.**

Fasteners, except as noted, are not included. All items are carried in stock in substantial quantities and are available for prompt shipment.



Primary School

**CARLSTADT® SELF-ALIGNING WALL BRACKETS**

These wall brackets, available in aluminum, bronze, nickel-silver, and stainless steel, are self-aligning. Once the concealed wall attachment is made, the bracket yoke—which attaches to the handrail—rotates freely until the chosen handrail is properly aligned. Various styles are available to coordinate with different handrail mouldings and with pipe railings.

**CAST, STAMPED AND EXTRUDED WALL BRACKETS**

These wall brackets are more traditional in style and may be used in a multitude of applications. The various styles allow for concealed fastening or by attachment with a single 3/8" mounting bolt through the wall flange center.



313



173



370



1622



843



321



478



275

**CARLSTADT® SELF-ALIGNING POST BRACKETS**

Post brackets, available in aluminum, bronze, nickel-silver, and stainless steel, are post-mounted variations of the Carlstadt® wall brackets. A solid post is prepared by drilling and tapping to provide a match to the 1/2" stainless stud included as part of the bracket. The stainless stud may be replaced with a post bracket hanger bolt for attachment to a wood post. Hollow posts require a clear hole to be drilled with a tapped post cap or anchor plug inserted to accept the stud.

**VERTICAL MOUNTING BRACKETS**

The mounting brackets are useful for mounting handrails vertically, as in an elevator cab or hospital corridor. These brackets are often used with wood handrails, vertically mounted. They are also suitable for mounting handrails on top of a parapet or knee wall. Adapters are available to permit attachment to pipe or round tube.



439



1341



163



290



222



309




896



151

● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STAINLESS ● MALLEABLE IRON / STEEL ● TITANIUM


EXTRUDED - UNPOLISHED

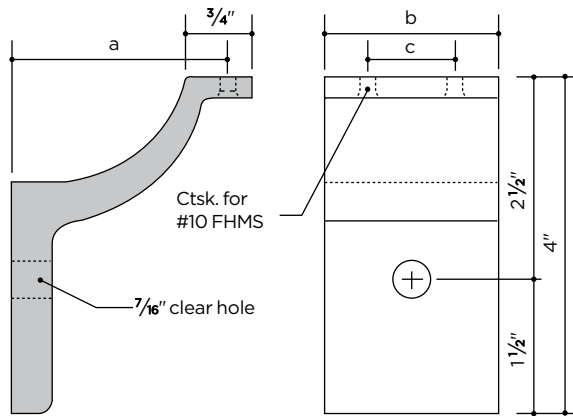

		a	b	c
● 477	Aluminum	2 1/2"	2"	1"
● 497	Aluminum	3"	2"	1"
● 891	Bronze	2 1/2"	2"	1"
● 893	Bronze	3"	2"	1"
● 193	Nickel-Silver	3"	2"	1"
● 217†	Stainless	2 1/2"	2"	1"
● 219†	Stainless	3"	2"	1"
● 9977	Titanium	2 1/2"	1 1/2"	3/4"


† Satin Finish

CAST

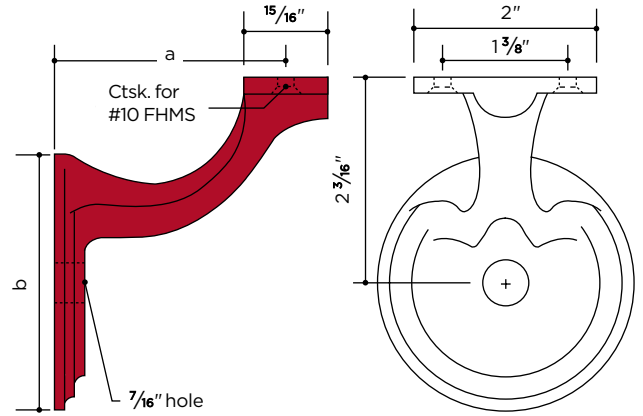


		a	b
● 381	Malleable Iron	2 1/2"	2 3/4"
● 305	Malleable Iron	3"	3 1/4"

STAMPED

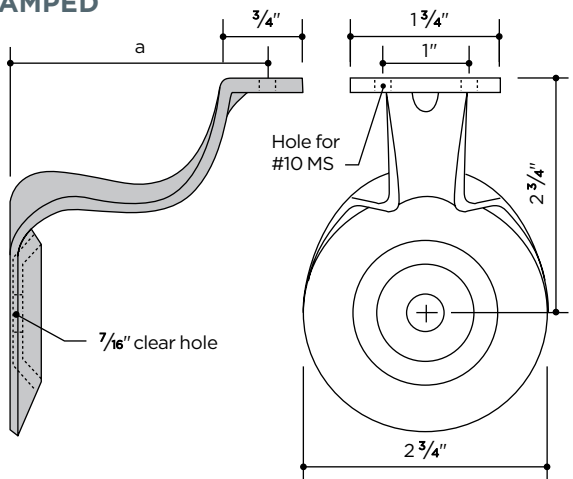


		a
● 621	Steel	2 1/2"
● 625	Steel	3"
● 1021††	Stainless	2 1/2"

†† Burnished

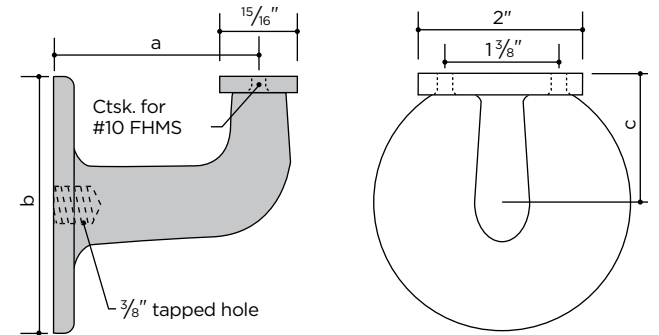


		a	b	c
● 371	Aluminum	2 1/2"	3 1/8"	1 9/16"
● 302	Aluminum	3 1/8"	3 3/4"	1 7/8"
● 370	Bronze	2 1/2"	3 1/8"	1 9/16"
● 304	Bronze	3 1/8"	3 3/4"	1 7/8"
● 170	Nickel-Silver	2 1/2"	3 1/8"	1 9/16"
● 270	Stainless	2 1/2"	3 1/8"	1 9/16"
● 377	Malleable Iron	2 1/2"	3 1/8"	1 9/16"
● 385	Malleable Iron	3"	3 1/8"	1 9/16"

WALL BRACKET FILLER

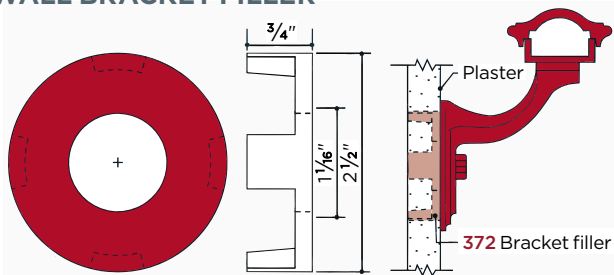


● 372 Malleable Iron Set bracket filler in plaster wall before mounting handrail bracket.

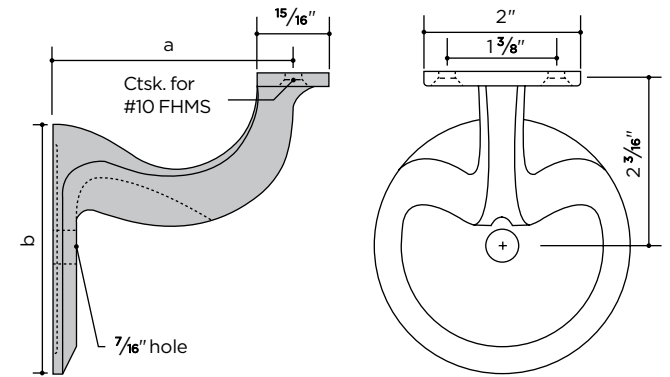

		a	b
● 383	Aluminum	2 1/2"	2 3/4"
● 315	Aluminum	3"	3 1/4"
● 387	Bronze	2 1/2"	2 3/4"
● 317	Bronze	3"	3 1/4"
● 1087	Stainless	2 1/2"	2 3/4"


● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STAINLESS ● MALLEABLE IRON / STEEL

EXTRUDED - UNPOLISHED

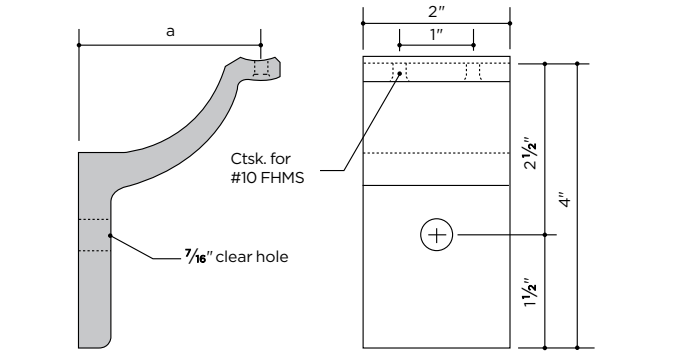

		a
● 478*	Aluminum	2 1/2"
● 498*	Aluminum	3"
● 892	Bronze	2 1/2"
● 894	Bronze	3"
● 192	Nickel-Silver	2 1/2"
● 218†	Stainless	2 1/2"
● 220†	Stainless	3"


CAST

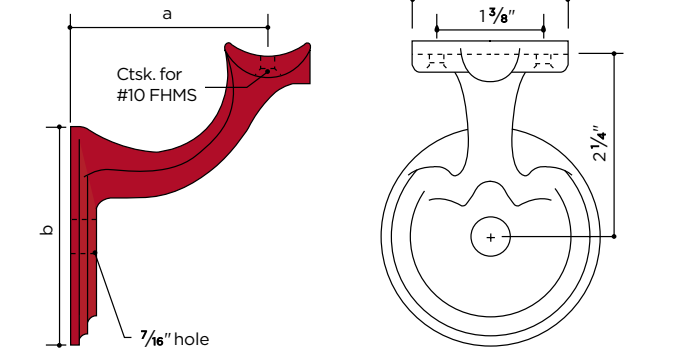


		a	b
● 382	Malleable Iron	2 1/2"	2 3/4"
● 382-B	Malleable Iron (Black) <sup>^</sup>	2 1/2"	2 3/4"
● 382-W	Malleable Iron (White) <sup>^</sup>	2 1/2"	2 3/4"
● 1382**	Malleable Iron (Galvanized)	2 1/2"	2 3/4"
● 306	Malleable Iron	3"	3 1/4"
● 1306**	Malleable Iron (Galvanized)	3"	3 1/4"

<sup>^</sup> Powdercoated

STAMPED

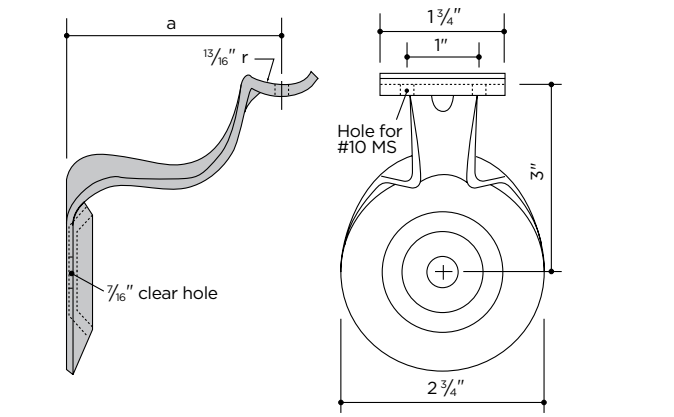


		a
● 622	Steel	2 1/2"
● 1622**	Steel (Galvanized)	2 1/2"
● 1022††	Stainless	2 1/2"
● 626	Steel	3"
● 1626**	Steel (Galvanized)	3"
● 1026††	Stainless	3"

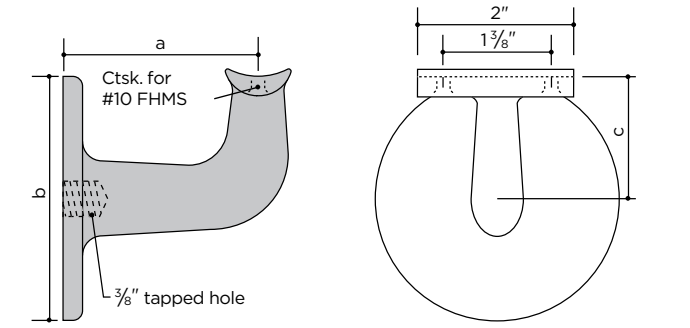


		a	b	c
● 376*	Aluminum	2 1/2"	3 1/8"	1 9/16"
● 389*	Aluminum	3 1/8"	3 3/4"	1 7/8"
● 375	Bronze	2 1/2"	3 1/8"	1 9/16"
● 319	Bronze	3 1/8"	3 3/4"	1 7/8"
● 176	Nickel-Silver	2 1/2"	3 1/8"	1 9/16"
● 275	Stainless	2 1/2"	3 1/8"	1 9/16"
● 378	Malleable Iron	2 1/2"	3 1/8"	1 9/16"
● 386	Malleable Iron	3"	3 1/8"	1 9/16"
● 1378**	Malleable Iron (Galvanized)	2 1/2"	3 1/8"	1 9/16"
● 1386**	Malleable Iron (Galvanized)	3"	3 1/8"	1 9/16"

CAST POST BRACKET

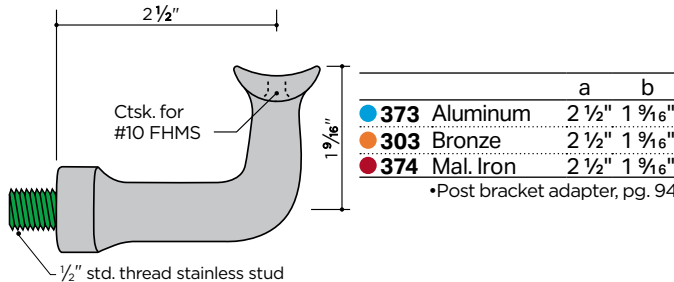

		a	b
● 373	Aluminum	2 1/2"	1 9/16"
● 303	Bronze	2 1/2"	1 9/16"
● 374	Mal. Iron	2 1/2"	1 9/16"

• Post bracket adapter, pg. 94

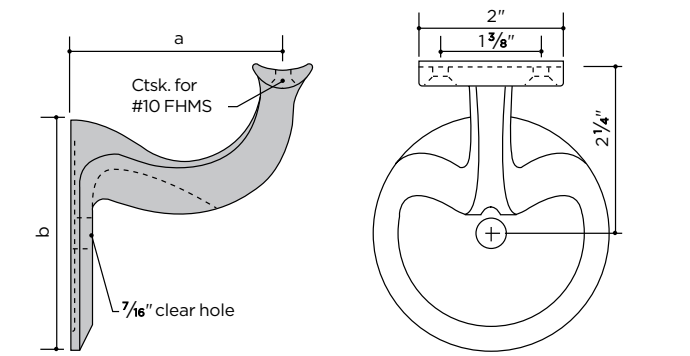

		a	b
● 384*	Aluminum	2 1/2"	2 3/4"
● 316*	Aluminum	3"	3 1/4"
● 388	Bronze	2 1/2"	2 3/4"
● 318	Bronze	3"	3 1/4"
● 1088	Stainless	2 1/2"	2 3/4"

\* Also available in clear anodized AA-M10-C22-A31 (204R1)  
 † Satin Finish †† Burnished


\*\* Galvanized brackets may require redrilling and tapping of holes fouled by zinc

● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STAINLESS


SELF-ALIGNING

Satin Finish


For use with pipe railings

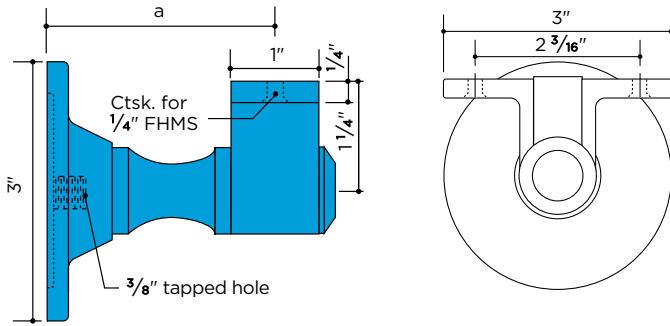

For use with Carlstadt® handrail moulding		a
● 313	Aluminum	2 5/8"
● 314	Aluminum	3 1/8"

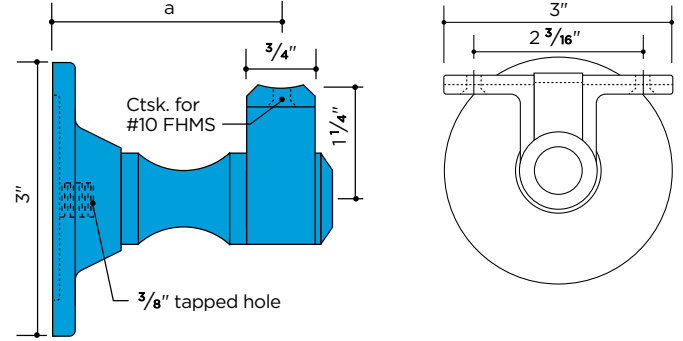


For use with pipe railings		a
● 307*	Aluminum	2 1/2"
● 308*	Aluminum	3"

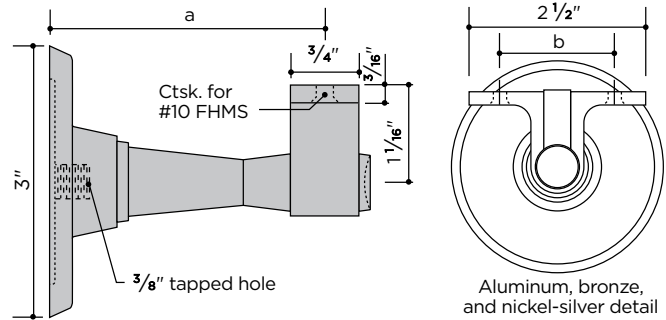


	a	b	
● 443	Aluminum	3"	1 5/8"
● 444	Aluminum	3 1/2"	1 5/8"
● 844	Bronze	2 1/2"	1 5/8"
● 843	Bronze	3"	1 5/8"
● 1343	Nickel-Silver	3"	1 5/8"
● 271	Stainless	2 1/4"	1 13/16"
● 243	Stainless	3"	1 13/16"

Aluminum, bronze, and nickel-silver detail




Stainless detail

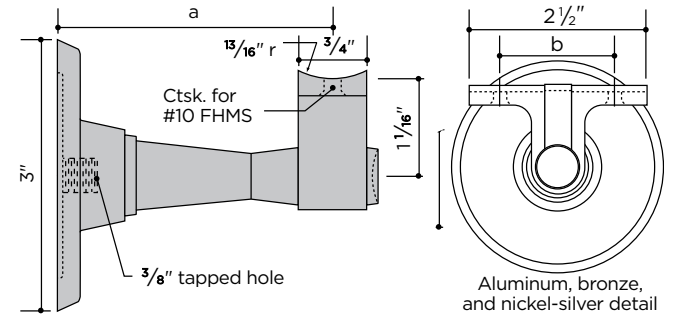


	a	b	
● 321*	Aluminum	2 1/4"	1 5/8"
● 403*	Aluminum	3"	1 5/8"
● 405*	Aluminum	3 1/2"	1 5/8"
● 842	Bronze	2 1/4"	1 5/8"
● 801	Bronze	2 1/2"	1 5/8"
● 803	Bronze	3"	1 5/8"
● 1342	Nickel-Silver	2 1/4"	1 5/8"
● 1303	Nickel-Silver	3"	1 5/8"
● 242	Stainless	2 1/4"	1 13/16"
● 221	Stainless	2 1/2"	1 13/16"
● 223	Stainless	3"	1 13/16"


Aluminum, bronze, and nickel-silver detail



Stainless detail

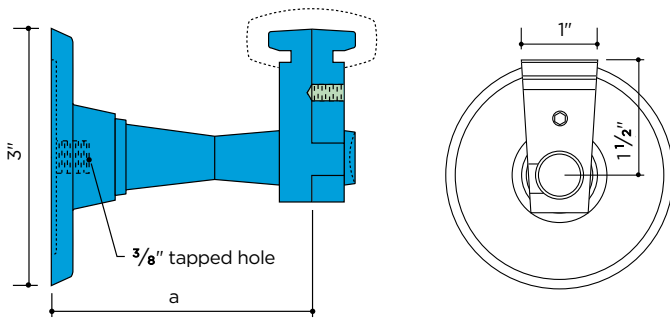

For use with Carlsrail® handrail moulding		a
● 175	Aluminum	2 1/4"
● 173	Aluminum	3"
● 174	Aluminum	3 1/2"

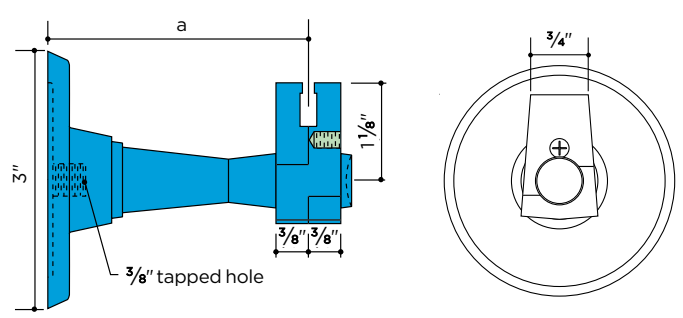

For use with Carlstadt® T-handrail moulding		a
● 418	Aluminum	3"
● 419	Aluminum	3 1/2"

\* Also available in clear anodized AA-M32-C22-A31 (204R1) Wall bracket extensions, pg. 94





● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STAINLESS

**SELF-ALIGNING**


Carlstadt® Post Brackets are supplied with 1/2" stainless steel studs for attachment to metal posts. To mount Carlstadt® Post Brackets onto wood, use the post bracket hanger bolt shown on page 94.

Satin Finish






For use with pipe railings

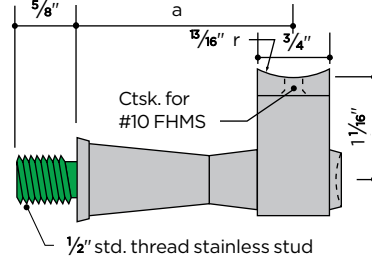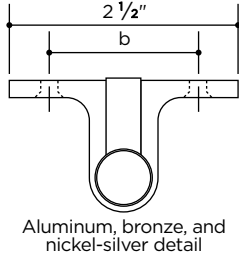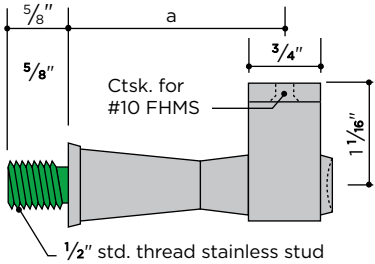

	a	b
● 441 Aluminum	2 1/4"	1 5/8"
● 442 Aluminum	2 3/4"	1 5/8"
● 841 Bronze	2 1/4"	1 5/8"
● 1341 Nickel-Silver	2 1/4"	1 5/8"
● 241 Stainless	2 1/4"	1 13/16"







	a	b
● 402* Aluminum	2 1/4"	1 5/8"
● 402L* Aluminum	2 1/2"	1 5/8"
● 404* Aluminum	2 3/4"	1 5/8"
● 802 Bronze	2 1/4"	1 5/8"
● 1302 Nickel-Silver	2 1/4"	1 5/8"
● 222 Stainless	2 1/4"	1 13/16"
● 222L Stainless	2 1/2"	1 5/8"

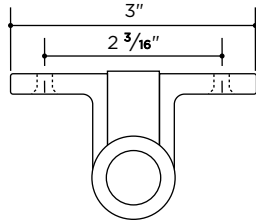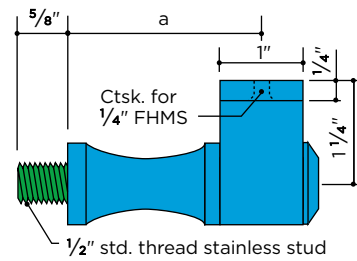

For use with Carlstadt® handrail moulding	a
● 309 Aluminum	3 1/4"
● 312 Aluminum	2 3/8"

● 322\* Aluminum

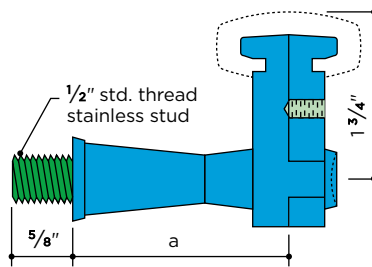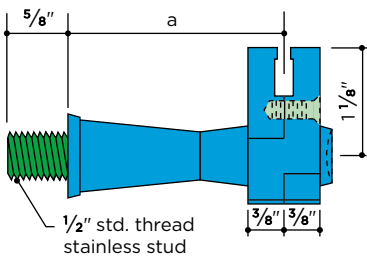


For use with Carlstadt® T-handrail moulding	a
● 439 Aluminum	2 1/4"
● 440 Aluminum	2 3/4"

For use with Carlsrail® handrail moulding	a
● 171 Aluminum	2 1/4"
● 172 Aluminum	2 3/4"

\* Also available in clear anodized AA-M32-C22-A31 (204R1) Post bracket extensions, pg. 94

● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STAINLESS ● CAST IRON/MALLEABLE IRON/STEEL

POST BRACKET EXTENSIONS

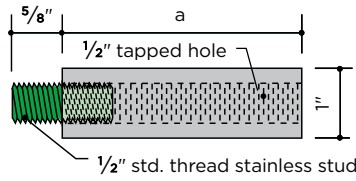


	a
● 462* Aluminum	13/4"
● 463* Aluminum	3"
● 862 Bronze	13/4"
● 863 Bronze	3"
● 1362 Nickel-Silver	13/4"
● 1366 Nickel-Silver	3"
● 245 Stainless	13/4"
● 246 Stainless	3"

Extensions may be cut to length to suit individual conditions.

Designers should note that extending a bracket increases stress at its base and reduces its allowable load.

POST BRACKET ADAPTER


Satin Finish

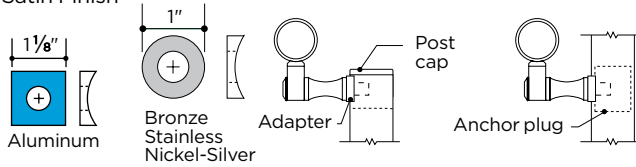

	Pipe Size	Schedule	Clear Hole
● 7161* Aluminum	1 1/4"	all	1/2"
● 7261* Aluminum	1 1/2"	all	1/2"
● 8661 Bronze	1 1/4"	all	1/2"
● 8861 Bronze	1 1/2"	all	1/2"
● 1361 Nickel-Silver	1 1/2"	all	1/2"
● 9161 Stainless	1 1/4"	all	1/2"
● 9361 Stainless	1 1/2"	all	1/2"
● 3164 Malleable Iron	1 1/2"	all	1/2"


Post Bracket Assembly Details

Angle may be adjusted as required.

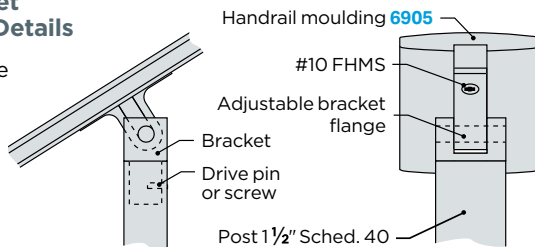


Adjustable Bracket Detail

Post and upper post cap must be drilled and tapped to accept bracket arm. Recess of bracket arm has flat sides to accommodate wrench, which permits tightening without marring exposed surfaces. Handrail flange tilts to adjust to stair angle and is attached to handrail with machine screws. Pressure on tightening block prevents looseness and rattling.

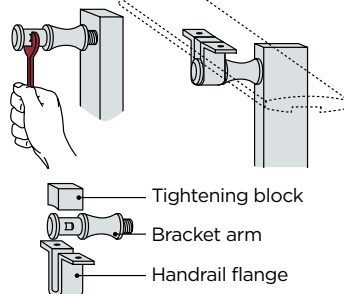

\* Also available in clear anodized AA-M10-C22-A31 (204R1)

WALL BRACKET EXTENSIONS

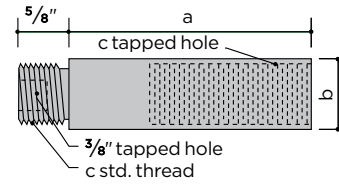

For use with 307, 308, 313, and 314 wall brackets

	a	b	c
● 414* Aluminum	13/4"	11/8"	7/8"
● 415* Aluminum	3"	11/8"	7/8"

For use with Carlstadt® wall brackets

	a	b	c
● 464 Aluminum	13/4"	1"	3/4"
● 465 Aluminum	3"	1"	3/4"
● 864 Bronze	13/4"	1"	3/4"
● 865 Bronze	3"	1"	3/4"
● 1364 Nickel-Silver	13/4"	1"	3/4"
● 1365 Nickel-Silver	3"	1"	3/4"
● 247 Stainless	13/4"	1"	3/4"
● 248 Stainless	3"	1"	3/4"

Extensions may be cut to length to suit individual conditions but not shorter than 1 1/8".

Extending the reach of a handrail bracket reduces its load-bearing capacity. To compensate for the reduced strength, the number of brackets may be increased and their spacing reduced.

BOLTS AND ANCHORS

For handrail wall brackets

Hanger Bolt



● Steel 3/8" x 3"

Hex Head Lag Screw




- Aluminum 3/8" x 2"
- Brass 3/8" x 2" (Plain or Finished)
- Nickel-Silver 3/8" x 2" (Finished)
- Stainless 3/8" x 2"

Post Bracket Hanger Bolt



● Steel 5/16" x 1 1/2" / 1/2" -13 x 3/8"

Heavy-Duty Double Machine Bolt Anchor (Zinc Alloy)




Non-calking machine bolt anchor for use in masonry materials of questionable strength or where heavy shear loads are encountered. Thread accommodates 3/8" - 16 stud or machine bolt (supplied by others). Drill hole size of 3/4" diameter by 2 1/4" deep.


● ALUMINUM ● STAINLESS

**CENTER POST BRACKETS**


Center post brackets permit handrail to be centered directly over post, yet allow it to tilt to conform to stair incline. Bracket is secured to post with pin or screw.

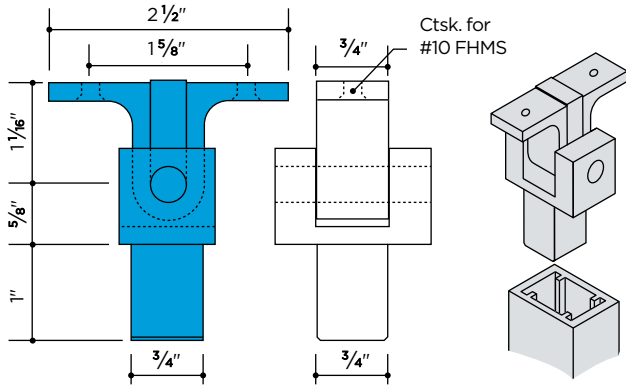

- 161 Aluminum Curved for pipe, fits posts 430 and 6430
- 162 Aluminum Flat for moulding, fits posts 430 and 6430

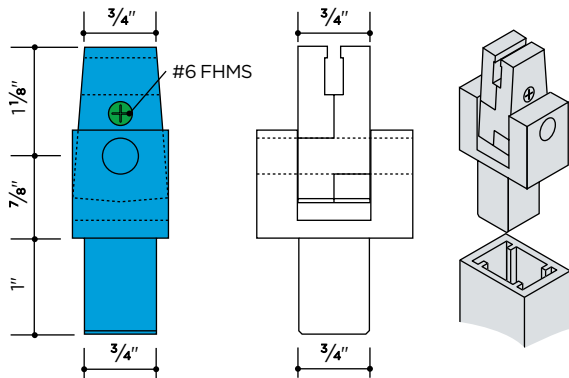

- 152 Aluminum Fits posts 430, 6430, and Carlstadt® T-handrail moulding

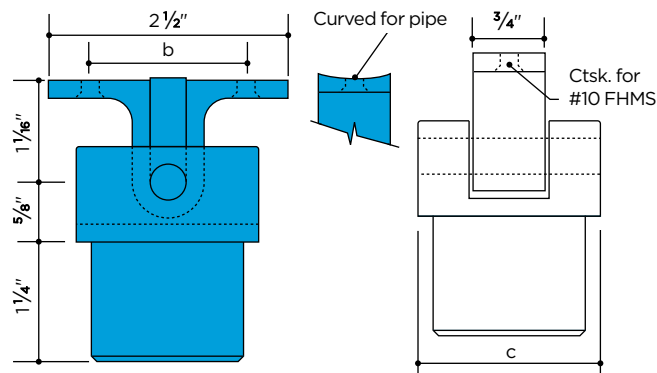


For center mounting of flat-bottomed handrail onto aluminum Connectorail® posts

Flat	Pipe	Sched.	c	b
● 144 Aluminum	1 1/4"	40	1.660"	1 5/8"
● 145 Aluminum	1 1/2"	40	1.900"	1 5/8"


For center mounting of pipe or rounded handrail onto aluminum Connectorail® posts

Curved	Pipe	Sched.	c	b
● 142 Aluminum	1 1/4"	40	1.660"	1 5/8"
● 143 Aluminum	1 1/2"	40	1.900"	1 5/8"

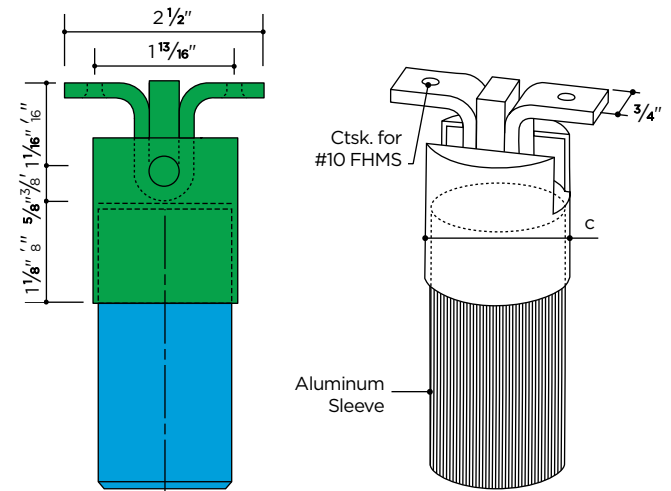

For center mounting of flat-bottomed handrail moulding onto stainless Connectorail® posts

Flat	Pipe	Sched.	c
● 207 Stainless Steel	1 1/2"	5	1.900"

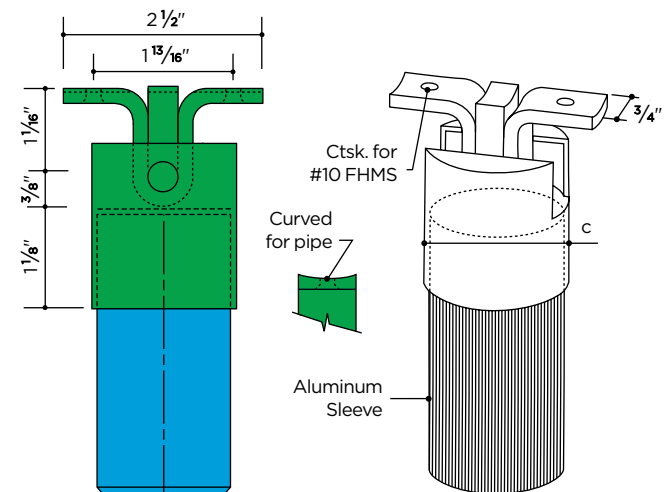

For center mounting of handrail pipe or rounded handrail onto stainless Connectorail® posts

Curved	Pipe	Sched.	c
● 208 Stainless Steel	1 1/2"	5	1.900"


● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STAINLESS

**GLASS-MOUNTED HANDRAIL**

Handrail may be mounted to the face of the tempered glass balustrade using a combination of Carlstadt® wall brackets and our glass mounting adapter kit. The kit contains a disc with a 3/8" stud weld, a bushing, and two gaskets.


**To assemble:**

1. Prior to tempering, for 1/2" glass drill a 5/8" clear hole; for 3/4" glass drill a 7/8" clear hole.  
**(Do not attempt to drill a hole in tempered glass – it will most likely break).**
2. Insert the bushing into the hole.
3. Insert the stud welded disc with gasket through the bushing; place the gasket on the other side.
4. Thread on bracket and tighten.

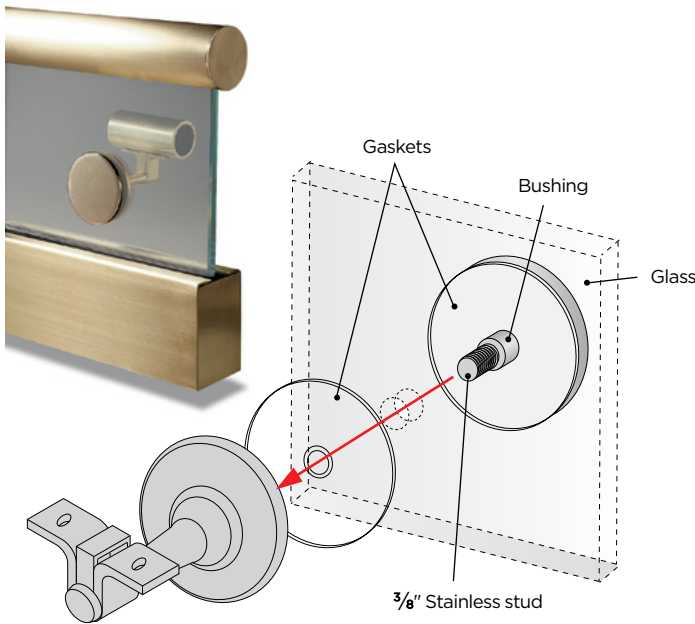

**GLASS-MOUNTED HANDRAIL ADAPTER KIT**

For 1/2" and 3/4" glass, Satin Finish

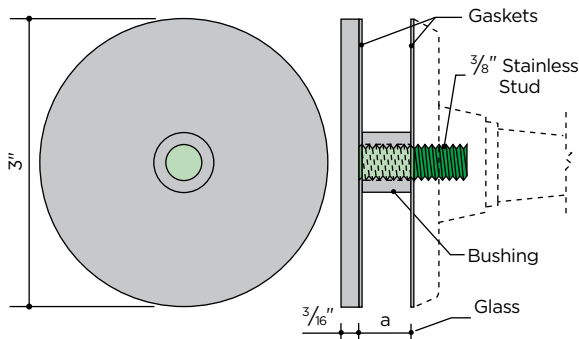


		Glass Size	a	Bushing Diameter
● 824	Bronze	1/2"	1/2"	5/8"
● 840	Bronze	3/4"	3/4"	7/8"
● 224*	Stainless	1/2"	1/2"	5/8"
● 240*	Stainless	3/4"	3/4"	7/8"
● 1624	Nickel-Silver	1/2"	1/2"	5/8"
● 1640	Nickel-Silver	3/4"	3/4"	7/8"


\* For use with aluminum and stainless brackets

**THREADED BUSHING BRACKETS**

Satin Finish

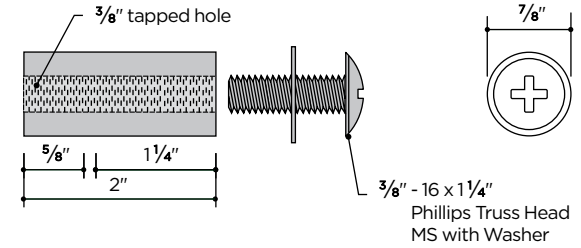


- 163 Aluminum
- 63 Stainless

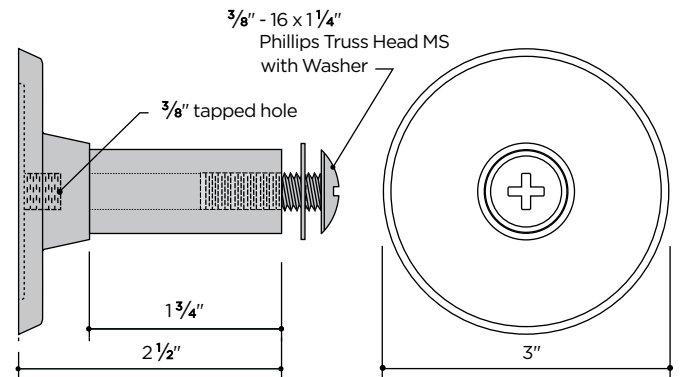

- 164 Aluminum
- 64 Stainless

**Installation Details**

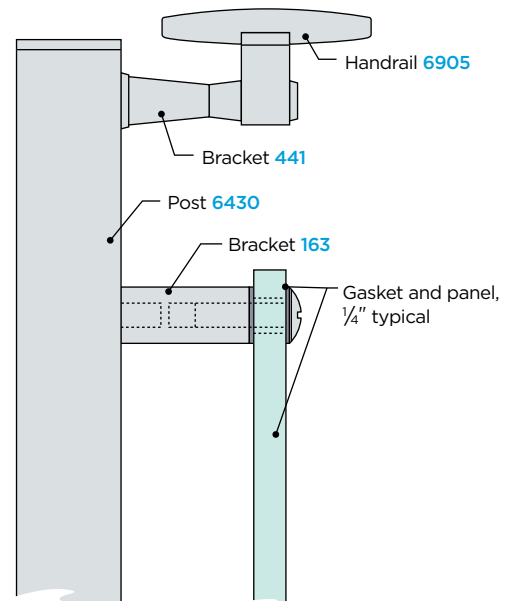


Threaded bushing brackets are used with threaded studs, machine screws, or bolts to install handrails or panels. Brackets may be cut to length as required. Brackets are furnished with aluminum Phillips Truss Head machine screws and washers.

● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STAINLESS


**TWO-PIECE MOUNTING BRACKETS**

Satin Finish

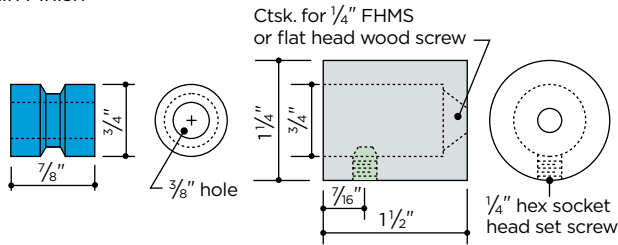


For elevator car handrails

- 166\* Aluminum
- 896 Bronze
- 196 Nickel-Silver
- 296 Stainless

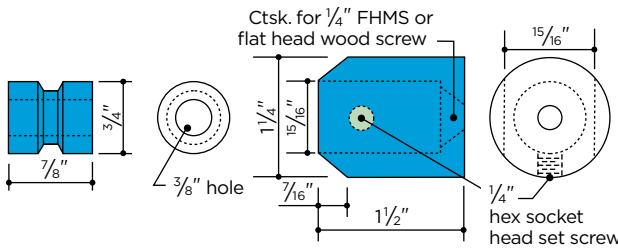


● 167 Aluminum For narrow posts

Versatile two-piece mounting brackets with concealed fasteners are suitable for mounting wall handrails and elevator car rails. 167 is tapered for mounting on a post of 1" or greater width.

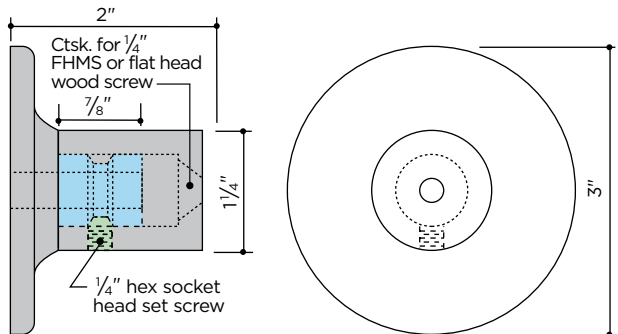

- 168\* Aluminum
- 898 Bronze
- 298 Stainless

**VERTICAL MOUNTING BRACKET**

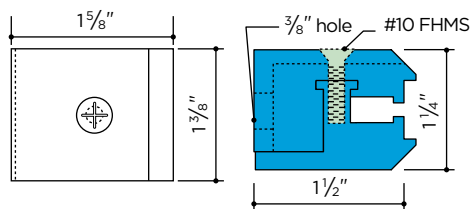


● 151 Aluminum

Vertical mounting bracket 151 is designed for mounting handrail on edge to provide a wall guard or bumper. T-handrail mouldings 6402, 6405, or 6407 can be mounted without drilling and tapping. Bracket is also suitable for mounting handrail on top of a parapet or wall.


**TWO-PIECE MOUNTING BRACKETS**

Satin Finish

For wide wood handrail

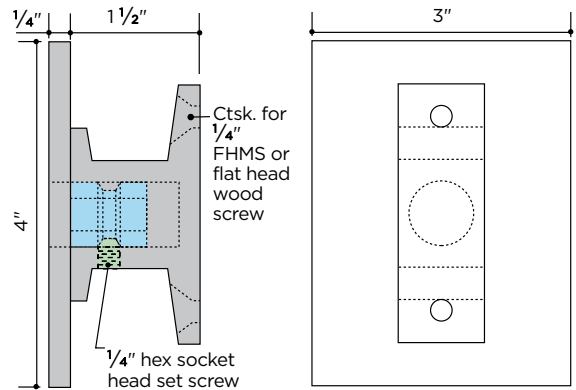


- 160\* Aluminum
- 890 Bronze
- 290 Stainless

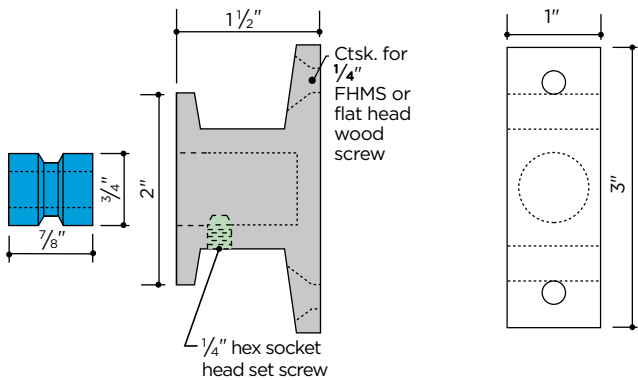

- 169\* Aluminum
- 899 Bronze
- 299 Stainless

**ADAPTER**

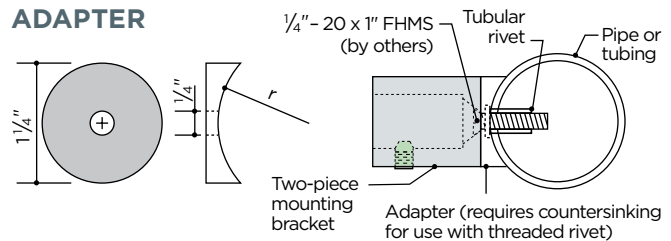

	r	Use With
● 7164* Aluminum	.830"	1.660" OD
● 7264* Aluminum	.950"	1.900" OD
● 8864 Bronze	.950"	1.900" OD
● 8964 Bronze	.750"	1.500" OD
● 5264 Nickel-Silver	.750"	1.500" OD
● 5364 Nickel-Silver	.950"	1.900" OD
● 9164 Stainless	.830"	1.660" OD
● 9364 Stainless	.950"	1.900" OD

\* Also available in clear anodized AA-M32-C22-A31 (204R1)

# ELEVATOR SADDLES THRESHOLDS MOULDINGS



Elevator Cab Interior

This section details our components that are of particular use in the assembly of elevator cabs. Included are Elevator Door Saddles, Flat Fluted Sections, Thresholds and Mouldings, Glass Framing Sections, Door Edgings, and Handrail Mouldings and Brackets suitable for vertical mounting. All brackets are satin finished.

- **Aluminum** components are of alloy 6063; extrusions are T52 temper while machined brackets are T6 temper. When properly fabricated, they are suitable for anodizing, including most of the hard coat anodic processes. Black anodizing may result in inconsistent matches—consult your anodizer before specifying.
- **Bronze** components are of extruded architectural bronze alloy, C38500.
- **Nickel-Silver** saddles, fluted sections, and handrail are extruded from copper-nickel-zinc alloy, C79800.
- **Stainless Steel** components are made of Type 302/304 (18-8) stainless steel.



## SADDLES

Elevator and door saddles are available in aluminum, bronze, nickel-silver, stainless steel, and steel. To extend width, flat fluted sections may be combined with single- or double-speed saddles. Saddle alloy matches handrail alloy. Components sold mill finish.



## MOULDINGS

A variety of architectural mouldings are available from stock. These mouldings provide for alternate methods of glass framing or door edgings. In restoration work, mouldings are frequently combined.



## HANDRAILS AND BRACKETS

Julius Blum & Co., Inc. stocks a large variety of handrail mouldings and brackets for both horizontal and vertical mounting in elevator cabs. Matching elbows and end caps are also available for most sections. Handrail sections are supplied with a smooth mill finish suitable for architectural finishes. All brackets satin finished.




## TUBING, BARS, AND SHAPES

A large selection of tubing, bars, and shapes are available from stock in aluminum, bronze, steel, nickel-silver and stainless steel. Refer to pages 106-121. Shapes are extruded to high tolerances and have the sharp corners required for architectural work. Angles and tees are frequently used in dropped ceilings as well as in other areas of elevator cabs.


● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STAINLESS

**ELEVATOR DOOR SADDLES**


Mill Finish

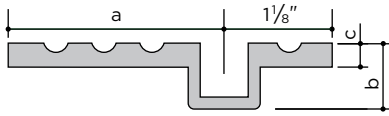


		a	b	c	lb/ft	Lengths
● 6963	Aluminum	2 1/4"	1 1/16"	1/4"	.85	20'
● 6969	Aluminum	2 7/8"	1 1/16"	1/4"	1.08	20'
● 4563	Bronze	2 1/4"	1 1/16"	1/4"	2.96	6', 8', 10', 16'
● 4569	Bronze	2 7/8"	1 1/16"	1/4"	3.93	6', 8', 10', 16'
● 5563	Nickel-Silver	2 1/4"	3/4"	1/4"	3.58	6', 8', 10'
● 5569	Nickel-Silver	2 7/8"	1 1/16"	1/4"	4.16	6', 8', 10'
● 5569X	Nickel-Silver	2 7/8"	1 1/16"	3/8"	5.40	6', 8'



		a	b	lb/ft	Lengths
● 6964	Aluminum	2 1/4"	1 1/16"	1.25	20'
● 6979	Aluminum	2 7/8"	1 1/16"	1.44	20'
● 4564	Bronze	2 1/4"	1 1/16"	4.25	6', 8', 10', 16'
● 4579	Bronze	2 7/8"	1 1/16"	5.09	6', 8', 10', 12'
● 5564	Nickel-Silver	2 1/4"	3/4"	5.42	6', 8', 10'
● 5579	Nickel-Silver	2 7/8"	1 1/16"	6.35	6', 8', 10'




		lb/ft	Lengths
● 6989	Aluminum	1.54	20'
● 4589	Bronze	4.79	8', 10'
● 5589	Nickel-Silver	5.05	8', 10'

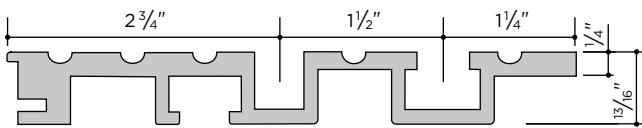


		lb/ft	Lengths
● 6999	Aluminum	2.10	20'
● 4599	Bronze	6.55	8', 10'
● 5599	Nickel-Silver	7.00	8', 10'

**EXTENSIONS**


20' lengths, Mill Finish




		lb/ft
● 6967	Aluminum	.314

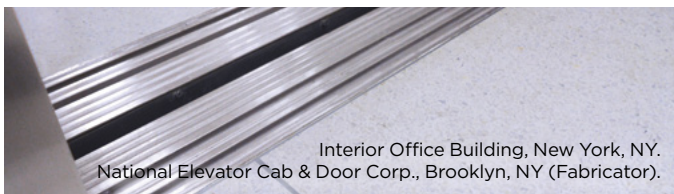


Interior Office Building, New York, NY.  
National Elevator Cab & Door Corp., Brooklyn, NY (Fabricator).

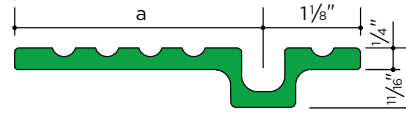


		a	lb/ft	Lengths
● 6569	Stainless	2 7/8"	3.71	8'
● 6571	Stainless	2 1/4"	3.32	8'



		a	lb/ft	Lengths
● 6579	Stainless	2 7/8"	5.53	8'
● 6572	Stainless	2 1/4"	5.18	8'

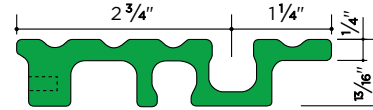


● 6589	Stainless	5.35 lb/ft	8' lengths
--------	-----------	------------	------------



● 6599	Stainless	7.52 lb/ft	8' lengths
--------	-----------	------------	------------

**FLAT FLUTED SECTIONS**

20' lengths, except as noted. For assembled saddles, Mill Finish



		a	c	lb/ft
● 6980***	Aluminum	1"	1/4"	.234
● 6970	Aluminum	1 1/2"	1/4"	.361
● 6971	Aluminum	2"	1/4"	.482
● 6973	Aluminum	3"	1/4"	.723
● 6975	Aluminum	4"	1/4"	.964
● 4566	Bronze	1"	1/4"	.720
● 4558	Bronze	1 1/2"	1/4"	1.150
● 4557	Bronze	2"	1/4"	1.480
● 4557X*	Bronze	2"	3/8"	2.390
● 4556	Bronze	2 1/2"	1/4"	1.840
● 4555	Bronze	3"	1/4"	2.230
● 4554***	Bronze	3 1/2"	1/4"	2.550
● 4553	Bronze	4"	1/4"	2.890
● 4553Q	Bronze	4 1/4"	1/4"	3.260
● 4552	Bronze	4 1/2"	1/4"	3.290
● 4551	Bronze	5"	1/4"	3.670
● 4550*	Bronze	5 1/2"	1/4"	4.050
● 4559	Bronze	6 1/8"	1/4"	4.550
● 5558***	Nickel-Silver	1 1/2"	1/4"	1.150
● 5553***	Nickel-Silver	4"	1/4"	3.040
● 6573**	Stainless	2 3/8"	1/4"	1.780
● 6575**	Stainless	4"	1/4"	3.050

\* 16' lengths \*\* 8' lengths \*\*\* 10' lengths


ELEVATOR SADDLES,  
THRESHOLDS, MOULDINGS

● ALUMINUM ● BRONZE ● STEEL

**DOOR SADDLES**


Mill Finish

FLUTED



		lb/ft	a	b	Lengths
● 6924	Aluminum	.72	3"	1/2"	16'-3"
● 6923	Aluminum	1.05	4"	1/2"	20'
● 6926	Aluminum	.83	4"	1/2"	16'-3"
● 6922	Aluminum	1.27	5"	1/2"	20'
● 6921	Aluminum	1.23	6"	1/2"	16'-3"
● 6925	Aluminum	1.76	7"	1/2"	20'
● 4524	Bronze	2.11	3"	3/8"	20'
● 4523	Bronze	3.05	4"	1/2"	20'
● 4522	Bronze	3.79	5"	1/2"	20'
● 4520	Bronze	4.64	6"	5/8"	20'
● 4519	Bronze	5.14	7"	1/2"	12'


SMOOTH




		lb/ft	a	b	Lengths
● 6910	Aluminum	.365	2 1/2"	1/4"	20'
● 6914	Aluminum	.476	3"	1/4"	16'-3"

**BATHROOM DOOR SADDLES**

20' lengths, Mill Finish




● 6948	Aluminum				.576 lb/ft
--------	----------	--	--	--	------------




● 4487	Steel				.93 lb/ft
--------	-------	--	--	--	-----------

Typical Details

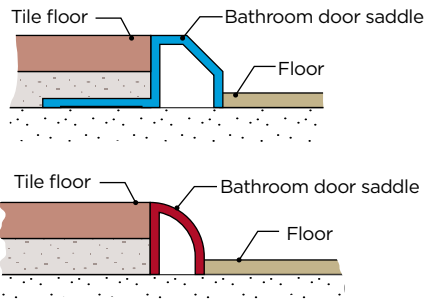


**WEATHER STRIP DOOR SADDLES**


20' lengths, except as noted, Mill Finish




● 6991	Aluminum				16'-3" lengths .689 lb/ft
--------	----------	--	--	--	---------------------------




● 4596	Bronze				2.21 lb/ft
--------	--------	--	--	--	------------



● 4590	Bronze				1.92 lb/ft
--------	--------	--	--	--	------------




● 4598	Bronze				.62 lb/ft
--------	--------	--	--	--	-----------



● 6998	Aluminum				16'-3" lengths .18 lb/ft
--------	----------	--	--	--	--------------------------

**BUTT SADDLE**


21'-1" lengths, Mill Finish



● 6915	Aluminum				.398 lb/ft
--------	----------	--	--	--	------------

**CARPET SADDLE**

21'-1" lengths, Mill Finish




● 6916	Aluminum				.653 lb/ft
--------	----------	--	--	--	------------

● ALUMINUM ● BRONZE


**DOOR SADDLE SECTION**

21'- 4" lengths, Mill Finish

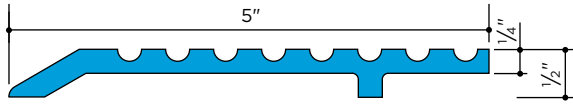

● **6913** Aluminum 1.48 lb/ft


**TYPICAL DOOR SADDLE DETAILS**

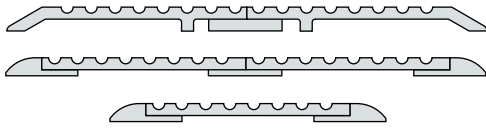


Cutouts for floor hinges can be made easily before assembly.  
 Wider saddles can be constructed by adding a flat fluted section in the center. The pattern of all fluted sections is identical, and joints with saddle sections will not be apparent.  
 Saddles of extreme width can be constructed by using bevel end sections and two or more flat fluted sections with a plate underneath.

**BEVEL END SECTIONS**

20' lengths, Mill Finish




● **4526** Bronze 1.35 lb/ft




● **6927** Aluminum .45 lb/ft  
 ● **4527** Bronze 1.48 lb/ft

**NOSINGS**


20' lengths, except as noted, Mill Finish

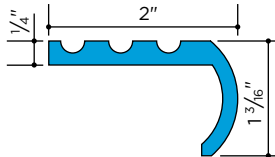

● **6961** Aluminum .722 lb/ft




● **4560\*** Bronze 2.45 lb/ft  
 \* 12' lengths



● **4565** Bronze 1.31 lb/ft

**ROOF DOOR SADDLE**


20' lengths, Mill Finish

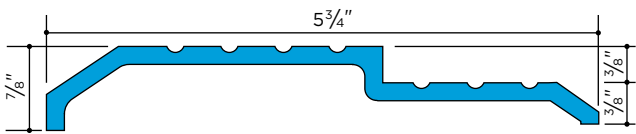


● **6997** Aluminum 1.45 lb/ft

**HANDRAIL MOULDINGS**


Aluminum 6063-T52, 20' lengths, Mill Finish

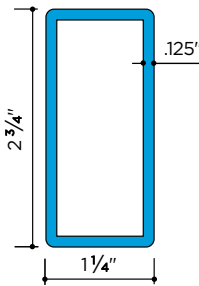


● **6434\*** 1.123 lb/ft  
 Fittings: end cap

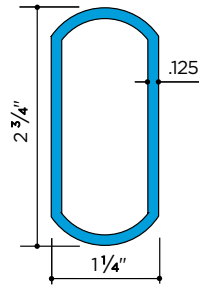


● **6435\*** 1.075 lb/ft  
 \*6063-T6  
 Fittings: end cap




● **6437** 1.057 lb/ft  
 Fittings: end cap

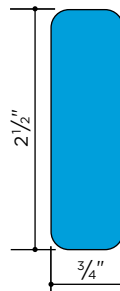


● **6939** 2.214 lb/ft




● **6988** 1.138 lb/ft

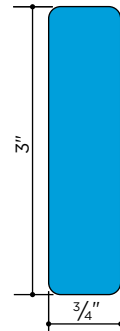


● **6986** 2.684 lb/ft




● **6985** .980 lb/ft  
 Fittings: end cap




● **6933** .770 lb/ft  
 Fittings: end cap




● **6935** .977 lb/ft  
 Fittings: end cap

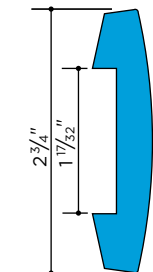


● **6984** 1.301 lb/ft  
 Fittings: end cap

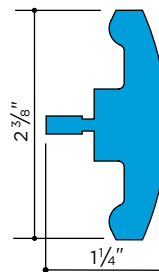

● **6402** 1.510 lb/ft  
 Fittings: end cap



● **6436** .888 lb/ft  
 Fittings: end cap



Pipe size	OD	Sch.	t	lb/ft
1 1/4"	1.66"	10	.109"	.625
1 1/4"	1.66"	40	.140"	.785
1 1/2"	1.90"	10	.109"	.721
1 1/2"	1.90"	40	.145"	.940

Fittings: end cap


Additional mouldings on pages 34-38

ELEVATOR SADDLES,  
 THRESHOLDS, MOULDINGS


● BRONZE ● NICKEL-SILVER ● STAINLESS

**HANDRAIL MOULDINGS**


Bronze C38500, 20' lengths, except as noted  
Mill Finish




● **4575** 2.37 lb/ft  
Fittings: end cap




● **4539** 2.66 lb/ft  
Fittings: end cap




● **4535** 3.35 lb/ft  
Fittings: end cap




● **4574** 3.71 lb/ft  
Fittings: end cap



● **4503** Bronze 2.73 lb/ft  
No fittings available




● **6488\*** 1.56 lb/ft  
Fittings: end cap \* 16' lengths




	OD	t	lb/ft
● <b>6489</b>	1 1/2"	.100"	1.75
	1.90"	.100"	2.07

Fittings: end cap, elbow

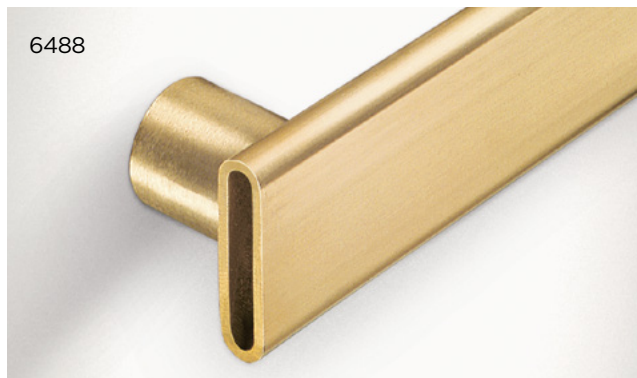


6488


Nickel-Silver 79800, 20' lengths,  
Mill Finish




● **5235** 3.16 lb/ft  
Fittings: end cap



● **5274** 3.71 lb/ft  
Fittings: end cap




● **5288** 1.56 lb/ft  
Fittings: end cap




	OD	t	lb/ft
● <b>5289</b>	1 1/2"	.100"	1.75
	1.90"	.109"	2.25

Fittings: end cap


Stainless Type 302/304 (18-8), 20' lengths, except as noted  
Mill Finish




● **6503** 2.54 lb/ft  
16' lengths. No fittings available




● **4488** .944 lb/ft  
Fittings: end cap



● **6511** 1.25 lb/ft  
Fittings: end cap



● **6512** 1.00 lb/ft  
Fittings: end cap



	Satin Finish		
Pipe size	OD	t	lb/ft
3/4"	1.06	.113"	1.20
1"	1.32	.120"	1.46
1 1/4"	1.66	.062"	1.11
1 1/4"	1.66	.148"	2.15
1 1/2"	1.90	.062"	1.27
1 1/2"	1.90	.148"	2.55


Fittings: end cap

Additional mouldings on pages 34-38


● ALUMINUM ● BRONZE ● NICKEL-SILVER ● STAINLESS

**TWO-PIECE MOUNTING BRACKETS**

Satin Finish

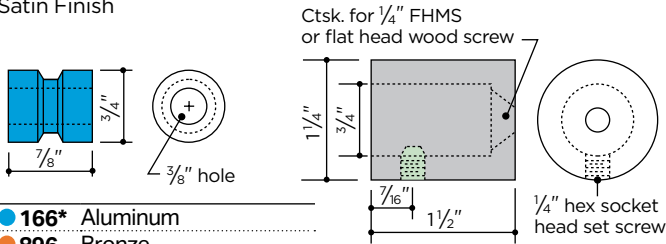


- 166\* Aluminum
- 896 Bronze
- 196 Nickel-Silver
- 296 Stainless

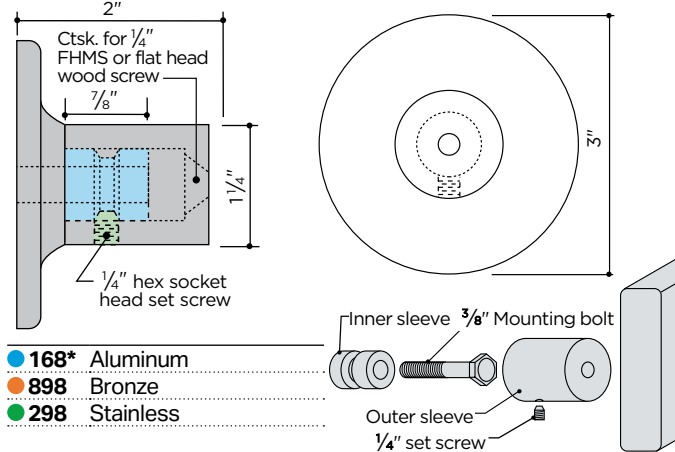


- 168\* Aluminum
- 898 Bronze
- 298 Stainless

For wide wood handrails

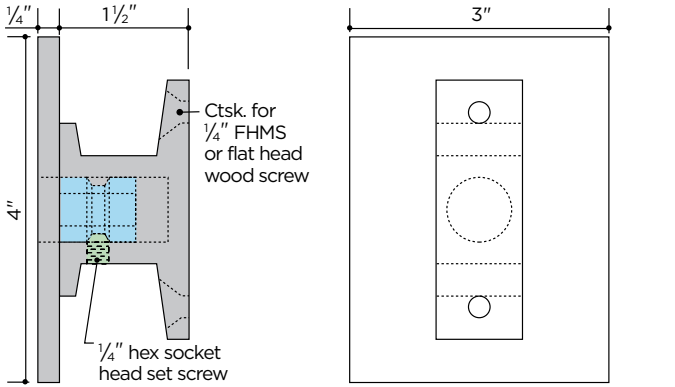

- 160\* Aluminum
- 890 Bronze
- 290 Stainless

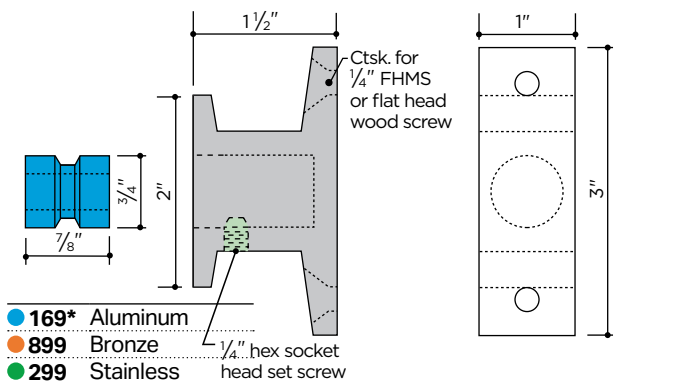


- 169\* Aluminum
- 899 Bronze
- 299 Stainless


\* Also available in clear anodized AA-M32-C22-A31 (204R1).

**THREADED BUSHING BRACKETS**

Satin Finish

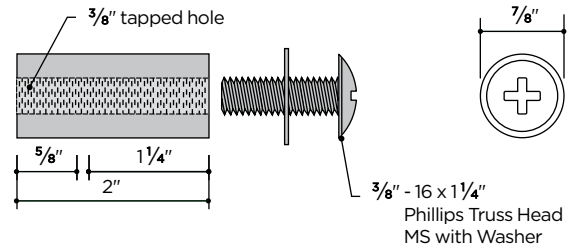


- 163 Aluminum
- 63 Stainless

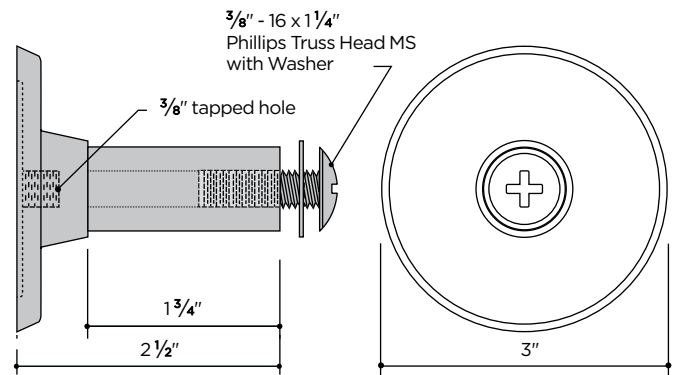

- 164 Aluminum
- 64 Stainless

**VERTICAL MOUNTING BRACKET**


Satin Finish

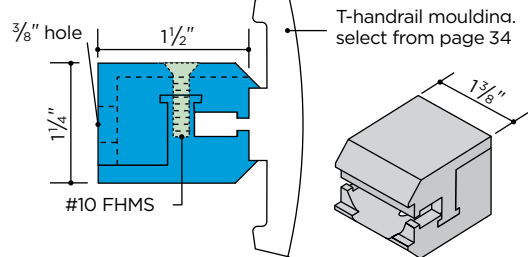

- 151 Aluminum

**ADAPTERS**

Satin Finish

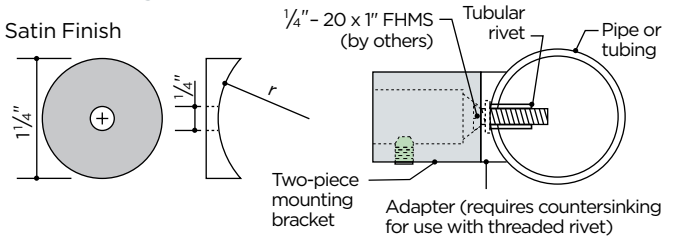


	r	Use With
● 7164* Aluminum	.830"	1.660" OD
● 7264* Aluminum	.950"	1.900" OD
● 8864 Bronze	.950"	1.900" OD
● 8964 Bronze	.750"	1.500" OD
● 5264 Nickel-Silver	.750"	1.500" OD
● 5364 Nickel-Silver	.950"	1.900" OD
● 9364 Stainless	.950"	1.900" OD

ELEVATOR SADDLES,  
THRESHOLDS, MOULDINGS


Full Scale  
**GLAZING MEMBERS**

20' lengths, except as noted

Aluminum and bronze glass stop/snap-in and flexible PVC glazing channel serve to mount panels of 1/4" glass, plastic, wire mesh, or other material.

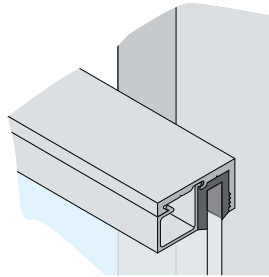


**GLASS STOP**

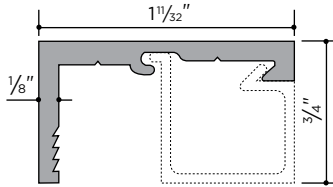

	lb/ft
● 8106 Aluminum Mill Finish	.276
● 8206 Aluminum Clear Anodized, AA-M10-C22-A31 (204R1)	.276
● 4506* Bronze	.950

\* 16' lengths

**SNAP-IN**





	lb/ft
● 8107 Aluminum Mill Finish	.138
● 8207 Aluminum Clear Anodized, AA-M10-C22-A31 (204R1)	.138
● 4507* Bronze	.510

\* 16' lengths

**FLEXIBLE PVC CHANNEL**



50' coils



● 8708 Flexible PVC	
---------------------	--

**COVE MOULDINGS AND GLASS STOPS**

20' lengths




	lb/ft		lb/ft
● 6952 Aluminum	.166	● 6955 Aluminum	.260
● 6102 Bronze	.500	● 6105 Bronze	.670


● ALUMINUM ● BRONZE ● NICKEL-SILVER ● PLASTIC

Full Scale  
**GLASS FRAMING SECTIONS**


20' lengths, except as noted

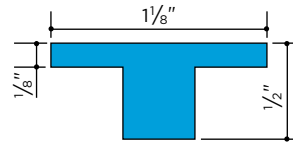


● 6958 Aluminum	.338 lb/ft
-----------------	------------

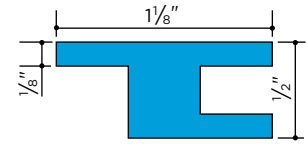

● 6959 Aluminum	.394 lb/ft
-----------------	------------




● 6960 Aluminum	.507 lb/ft
-----------------	------------



● 6953* Aluminum	.183 lb/ft
------------------	------------

\* 16' lengths


Framing Detail



Sections 6958 and 6959 with flat bars

**PANEL CLIPS**


For aluminum pipe only

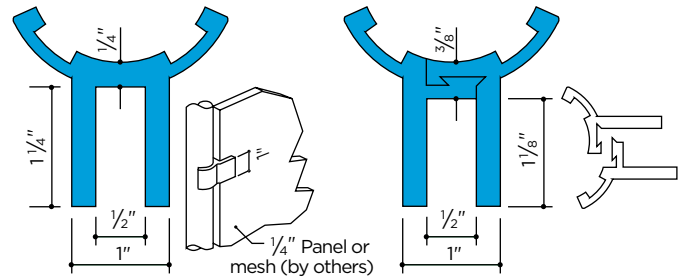

	Pipe	Packages of 4 sets	Pipe
● 7460-5* Aluminum	1 1/4"	● 7260** Aluminum	1 1/2"
● 7460† Aluminum	1 1/4"		* 5' Length
● 7560-5* Aluminum	1 1/2"		** Two-piece assembly
● 7560† Aluminum	1 1/2"		

† Packages of 4 pieces

For mounting to flat surface, Satin Finish

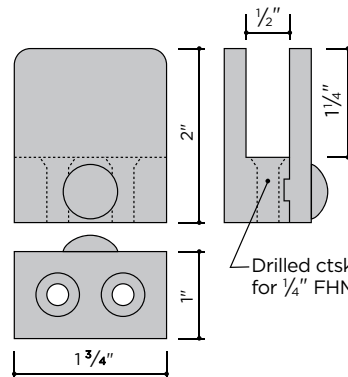

● 113	Aluminum
● 813	Bronze
● 413	Nickel-Silver
● 213	Stainless



Drilled ctsk. for 1/4" FHMS

Plug (packed separately) is inserted following installation and may be held in place with epoxy or other sealant. Installation detail page 87.


● ALUMINUM ● BRONZE

# DOOR EDGINGS


16' lengths, except as noted. Full Scale

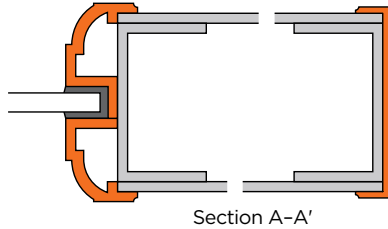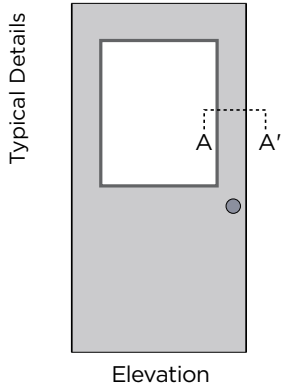


Detail at A-A' with 6643, 6645, and 6646

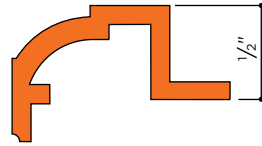


● 6645\* Bronze .79 lb/ft




● 6646\* Bronze .67 lb/ft




● 6648\* Bronze 1.10 lb/ft




● 6947 Aluminum .384 lb/ft




● 6647 Bronze .64 lb/ft

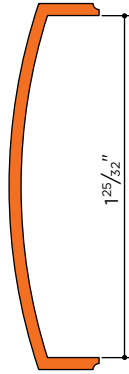

● 6642 Bronze .56 lb/ft

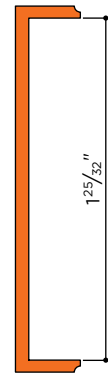

● 6643 Bronze .56 lb/ft

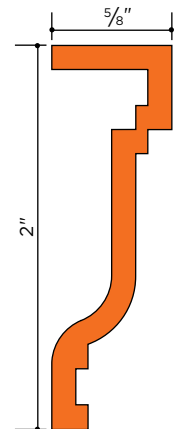


● 6138\* Bronze 1.35 lb/ft


\* 20' lengths

# VARIOUS MOULDINGS


20' lengths




● 6130 Bronze .70 lb/ft




● 6121 Bronze .60 lb/ft



● 6473 Bronze .76 lb/ft



● 6474 Bronze 1.01 lb/ft

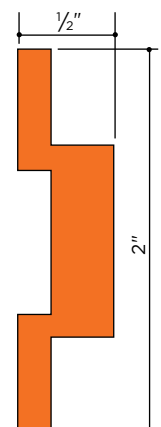

● 6140 Bronze 1.97 lb/ft

ELEVATOR SADDLES,  
THRESHOLDS, MOULDINGS

# TUBING, BARS, AND SHAPES

Our extensive stock of tubing, bars and shapes in aluminum, bronze, nickel-silver, steel, and stainless steel has been selected especially to meet the requirements of ornamental and miscellaneous metal work.

All items are carried in stock in substantial quantities and shipment is made promptly upon receipt of order. All tubing, bars, and shapes are supplied in stock lengths with a mill finish, except as noted. Julius Blum & Co., Inc. does not provide cutting or metal finishing services.

- **Aluminum** architectural shapes, bars, and tubes are extruded from alloy 6063-T52, except as noted. These items have a smooth, uniform surface and, when properly fabricated, are suitable for anodizing—including most of the hard coat anodic processes. Black anodizing may result in inconsistent matches. Consult your anodizer before specifying. Aluminum extrusions are packed in bundles of approximately

100 lbs., which are wrapped and paper-interleaved at the mill. Ordering in full bundles ensures surface quality and speeds shipping from our warehouse. Aluminum Structural shapes are extruded from alloy 6061-T6.


- **Steel** angles and channels are carbon steel C1010, except as noted. Cold rolled channel and angle have a square root and square edge.
- **Bronze** tubing, bars, and shapes are of extruded alloy C38500, architectural bronze. Round pipe is drawn alloy C23000, red brass. When polished, red brass will provide a generally acceptable match to architectural bronze.
- **Nickel-Silver** shapes are extruded from C79800. Nickel-silver is a copper/nickel alloy and contains no silver. When polished, nickel-silver has the appearance of stainless steel with golden highlights.

- **Stainless Steel** shapes are type 304 (18-8), except as noted. True bars have sharp corners and are not sheared from plate. Stainless steel tubing is of ornamental grade with a smooth surface that is simple to polish.

All extrusions are produced and handled with great care to ensure a product is well suited for architectural finishing. Items are thoroughly protected for shipment by wrapping and/or crating, with the exception of aluminum structural and steel shapes, which are normally shipped in strapped bundles. Elements of sections are shown alongside each item in this section. This data has been ascertained with care but cannot be guaranteed. For additional engineering information, see pages 122 to 129.



Cincinnati Museum Center at Union Terminal, Cincinnati, OH, Savage Metal Restoration, Austerlitz, NY (Fabricator), John G. Waite Associates, Architects PLLC, Albany, NY (Restoration Architect), GBBN, Cincinnati, OH (Architect), © Brad Feinknopf/OTTO (Photo Credit).

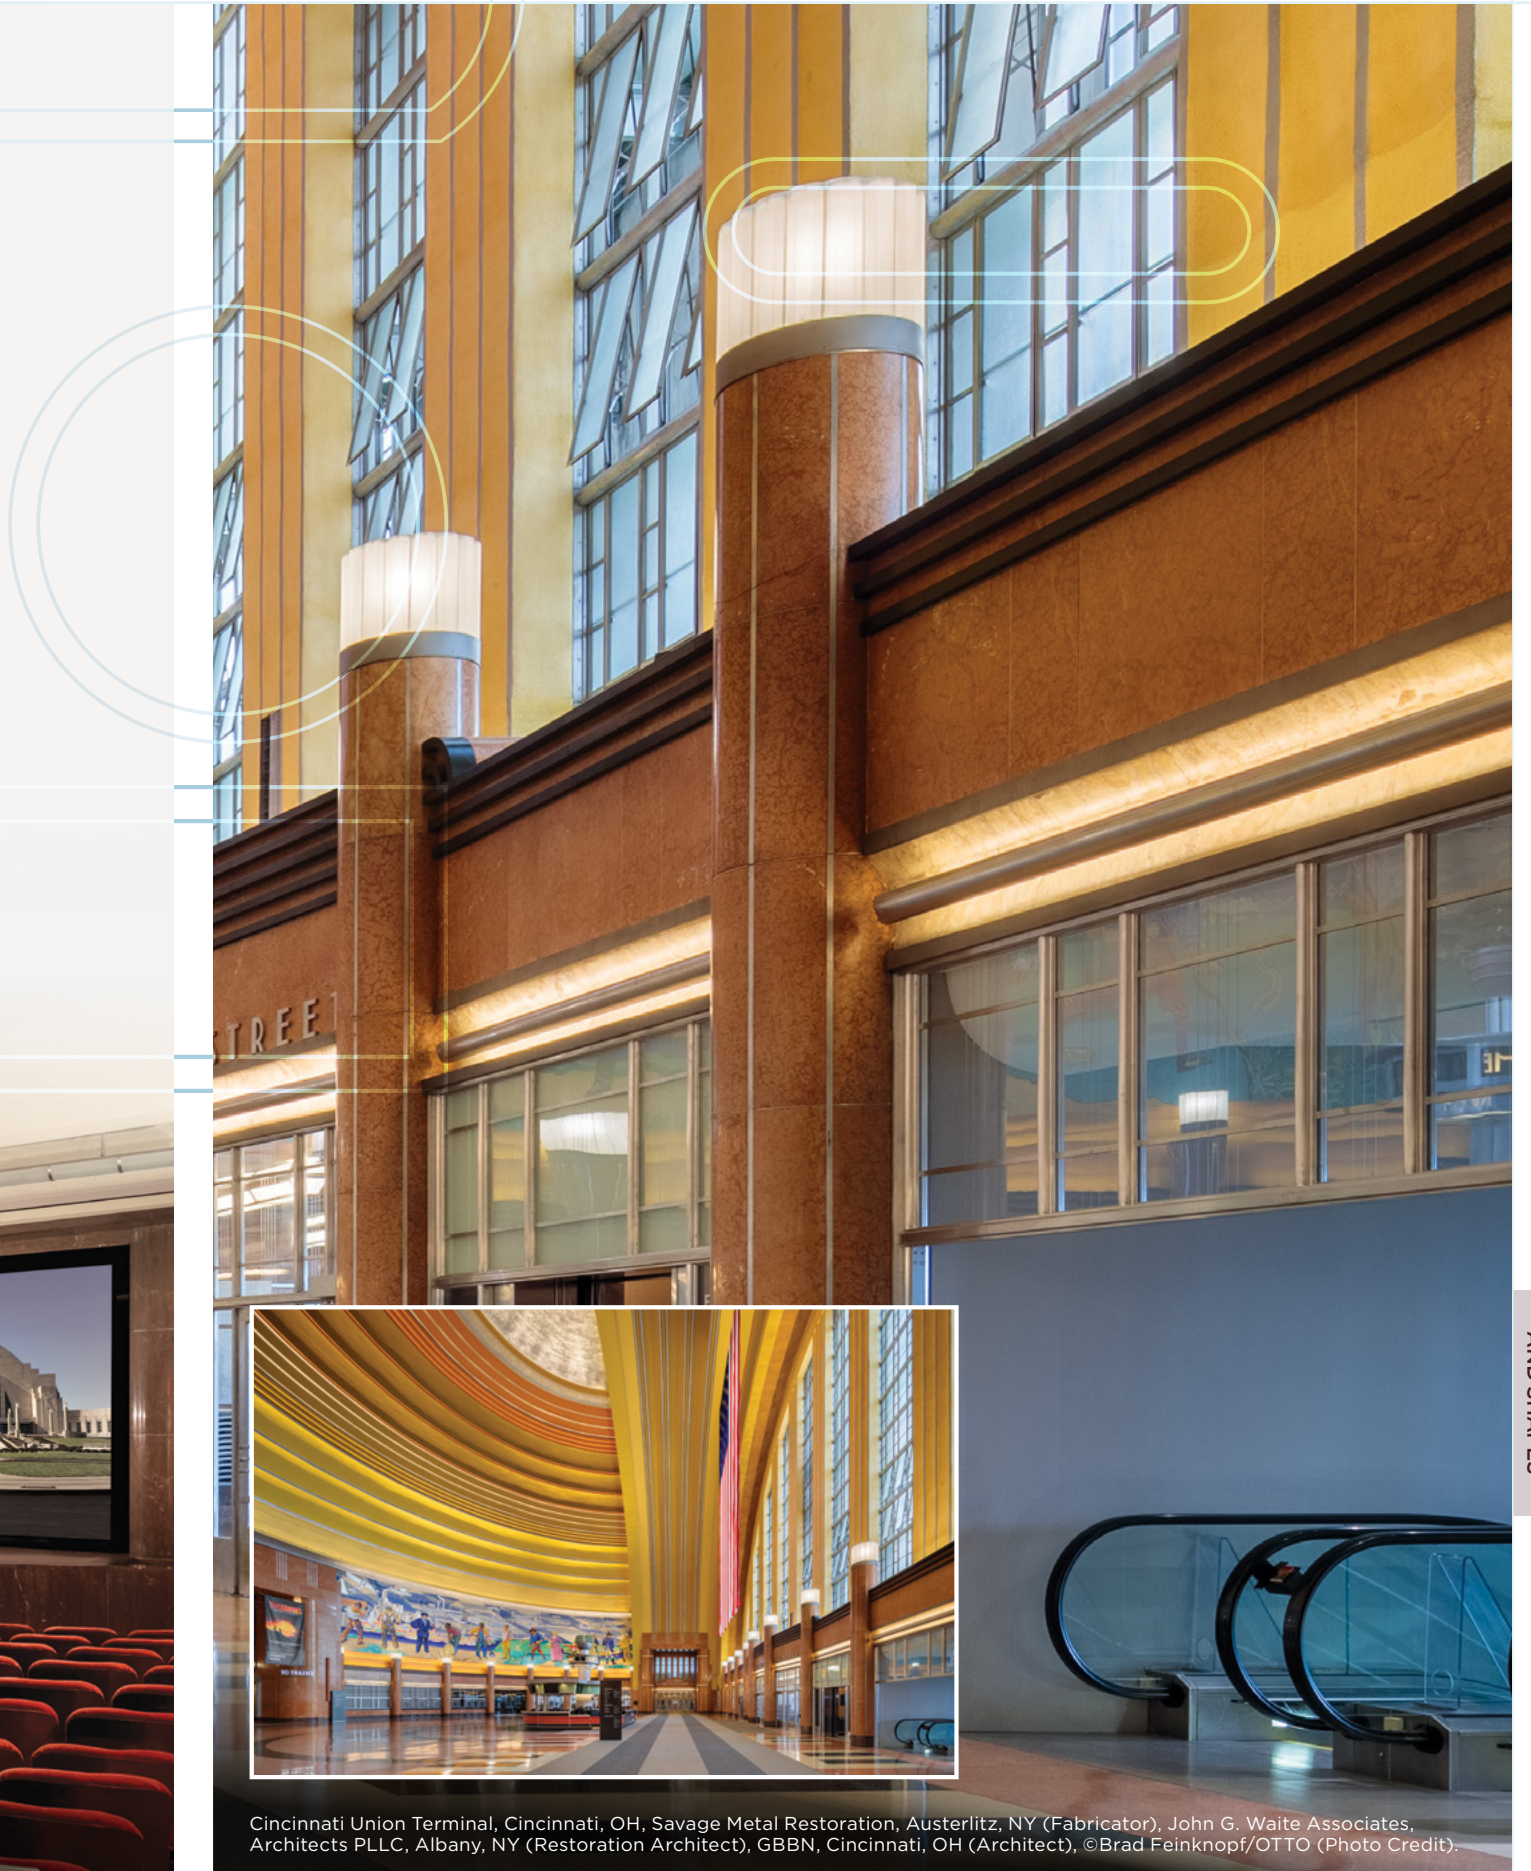



TUBING, BARS,  
AND SHAPES

Cincinnati Union Terminal, Cincinnati, OH, Savage Metal Restoration, Austerlitz, NY (Fabricator), John G. Waite Associates, Architects PLLC, Albany, NY (Restoration Architect), GBBN, Cincinnati, OH (Architect), ©Brad Feinknopf/OTTO (Photo Credit).

All dimensions in inches and weight in pounds per lineal foot

**FLAT BARS**

Sharp Corners, Mill Finish, 16' lengths

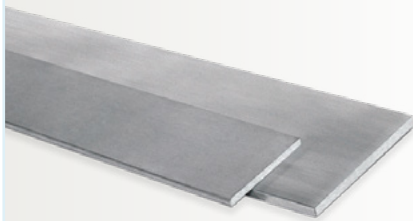

a	b	lb/ft	Bars per Bundle†	Area	Ix	Sx	Iy	Sy
1/8	1/2	.075	60	.063	.000	.001	.001	.005
1/8	5/8	.094	48	.078	.000	.002	.003	.008
1/8	3/4	.113	59	.094	.000	.002	.004	.012
1/8	1	.150	48	.125	.000	.003	.010	.020
1/8	1 1/8	.169	29	.141	.000	.003	.015	.026
1/8	1 1/4	.187	29	.156	.000	.003	.020	.032
1/8	1 1/2	.226	27	.188	.000	.004	.035	.047
1/8	1 3/4	.263	19	.219	.000	.005	.056	.064
1/8	2	.300	20	.250	.000	.005	.083	.083
1/8	2 1/2	.376	15	.313	.000	.007	.163	.130
1/8	3	.450	12	.375	.000	.008	.281	.187
1/8	3 1/2	.526	12	.438	.001	.009	.447	.255
1/8	4	.600	10	.500	.001	.010	.667	.334
1/8	5	.750	8	.625	.001	.013	1.302	.521
3/16	1/2	.113	60	.094	.000	.002	.002	.008
3/16	3/4	.169	37	.141	.000	.004	.007	.018
3/16	1	.226	30	.188	.001	.006	.016	.032
3/16	1 1/4	.282	23	.235	.001	.007	.031	.050
3/16	1 1/2	.337	19	.282	.001	.009	.053	.071
3/16	1 3/4	.394	16	.329	.001	.010	.084	.096
3/16	2	.450	12	.376	.001	.012	.125	.125
3/16	2 1/2	.564	12	.470	.001	.015	.244	.195
3/16	3	.677	10	.564	.002	.018	.422	.281
3/16	4	.900	7	.752	.002	.023	1.000	.500
1/4	1/2	.150	50	.125	.001	.005	.003	.010
1/4	5/8	.187	31	.156	.001	.007	.005	.016
1/4	3/4	.224	28	.188	.001	.008	.009	.023
1/4	1	.300	20	.250	.001	.008	.021	.042
1/4	1 1/4	.374	16	.313	.002	.016	.041	.066
1/4	1 1/2	.450	12	.375	.002	.016	.070	.093
1/4	1 3/4	.525	12	.438	.002	.016	.112	.128
1/4	2	.600	10	.500	.003	.024	.167	.167
1/4	2 1/2	.750	9	.625	.003	.024	.326	.261
1/4	3	.900	7	.750	.004	.032	.563	.375
1/4	3 1/2	1.050	5	.875	.005	.040	.893	.510
1/4	4	1.200	5	1.000	.005	.040	1.333	.667
1/4	5	1.500	4	1.250	.007	.056	2.604	1.042
1/4	6	1.800	3	1.500	.008	.064	4.500	1.500
5/16	1	.374	20	.313	.003	.019	.026	.052
5/16	1 1/2	.562	11	.469	.004	.026	.088	.117
5/16	2	.749	8	.625	.005	.032	.208	.208
5/16	6	2.170	3	1.875	.015	.096	5.625	1.875
3/8	1/2	.224	24	.188	.002	.012	.004	.016
3/8	5/8	.281	20	.234	.003	.015	.008	.024
3/8	3/4	.338	15	.281	.003	.018	.013	.035
3/8	1	.450	12	.375	.004	.021	.031	.062
3/8	1 1/4	.563	10	.469	.005	.027	.061	.098
3/8	1 1/2	.674	9	.563	.007	.037	.106	.141
3/8	1 3/4	.784	7	.656	.008	.043	.168	.192
3/8	2	.900	7	.750	.009	.048	.250	.250
3/8	2 1/2	1.126	5	.938	.011	.059	.488	.390
3/8	3	1.350	4	1.125	.013	.069	.844	.563
3/8	3 1/2	1.576	4	1.313	.015	.080	1.340	.767
3/8	4	1.800	3	1.500	.018	.096	2.000	1.000
3/8	5	2.260	3	1.875	.022	.177	3.906	1.563
1/2	3/4	.450	14	.375	.008	.031	.018	.047
1/2	1	.600	10	.500	.010	.040	.042	.084
1/2	1 1/4	.750	8	.625	.013	.052	.081	.130
1/2	1 1/2	.900	6	.750	.016	.064	.141	.188
1/2	1 3/4	1.050	5	.875	.018	.072	.223	.255


†Aluminum extrusions are pre-wrapped in 100-lb paper-interleaved bundles to speed shipment and prevent damage. Quantities are subject to change without notice.

● ALUMINUM Alloy 6063-T52

All dimensions in inches and weight in pounds per lineal foot

**FLAT BARS**


(continued)  
Sharp Corners, 16' lengths



a	b	lb/ft	Bars per Bundle†	Area	Ix	Sx	Iy	Sy
1/2	2	1,200	6	1.000	.021	.084	.333	.333
1/2	2 1/2	1,500	4	1.250	.026	.104	.651	.520
1/2	3	1,800	3	1.500	.031	.124	1.125	.750
1/2	3 1/2	2,100	3	1.750	.036	.144	1.787	1.020
1/2	4	2,400	2	2.000	.042	.168	2.667	1.333
5/8	1	.750	8	.625	.020	.064	.052	.104
5/8	1 1/4	.937	6	.781	.025	.080	.102	.163
5/8	1 1/2	1.124	5	.938	.031	.099	.176	.235
5/8	2	1.500	4	1.250	.041	.131	.417	.417
5/8	3	2.250	2	1.875	.061	.195	1.406	.937
3/4	1	.900	6	.750	.035	.094	.063	.125
3/4	1 1/4	1.126	5	.938	.044	.117	.122	.195
3/4	1 1/2	1.350	5	1.125	.053	.141	.210	.281
3/4	1 3/4	1.576	4	1.313	.062	.166	.335	.388
3/4	2	1.800	3	1.500	.070	.188	.500	.500
3/4	2 1/2	2.250	2	1.875	.088	.234	.977	.781
3/4	3	2.700	2	2.250	.106	.281	1.688	1.125
3/4	3 1/2	3.150	2	2.625	.123	.329	2.680	1.530
3/4	4	3.600	1	3.000	.141	.375	4.000	2.000
1	1 1/4	1.500	4	1.250	.104	.208	.163	.261
1	1 1/2	1.800	3	1.500	.125	.250	.281	.375
1	1 3/4	2.100	3	1.750	.146	.292	.447	.510
1	2	2.400	2	2.000	.167	.333	.667	.667
1	2 1/2	3.000	2	2.500	.208	.417	1.302	1.042
1	3	3.600	1	3.000	.250	.500	2.250	1.500
1	4	4.800	1	4.000	.333	.667	5.333	2.667

**SQUARE BARS**

Sharp Corners  
16' lengths, except  
as noted





a	b	lb/ft	Bars per Bundle†	Area	I	S
5/16	5/16	.116	48	.097	.001	.005
3/8	3/8	.169	40	.141	.002	.009
1/2*	1/2	.300	20	.250	.005	.021
5/8*	5/8	.468	12	.391	.013	.041
3/4	3/4	.674	10	.563	.026	.070
1	1	1.200	5	1.000	.083	.167
1 1/4	1 1/4	1.875	3	1.563	.204	.326
1 1/2	1 1/2	2.700	2	2.250	.422	.563
1 3/4	1 3/4	3.676	1	3.063	.782	.893
2	2	4.800	2	4.000	1.333	1.333

\* 16' & 20' lengths

**ROUND BARS**

16' lengths, except as noted



a	lb/ft	Bars per Bundle†	Area	I	S
3/8	.132	50	.110	.001	.005
1/2	.235	25	.196	.003	.012
5/8	.368	18	.307	.008	.024
3/4	.530	12	.442	.016	.041
7/8*	.727	12	.601	.029	.066
1*	.942	7	.785	.049	.098
1 1/8*	1.192	7	.994	.079	.140
1 1/4*	1.472	3	1.227	.120	.192
1 1/2	2.120	3	1.767	.249	.331
1.600**	2.415	3	2.010	.322	.402
1.625	2.740	-	2.074	.342	.421
1 3/4	2.886	3	2.404	.460	.526
2*	3.770	-	3.142	.785	.785
2 5/8*	6.500	-	5.412	2.331	1.030
3*	8.483	-	7.069	3.974	2.649
4**	15.079	-	12.568	12.566	6.283

\* 6063-T6 \*\* 6061-T6 • 12' lengths \*\* 10' lengths


†Aluminum extrusions are pre-wrapped in 100-lb paper-interleaved bundles to speed shipment and prevent damage. Quantities are subject to change without notice.

TUBING, BARS,  
AND SHAPES

All dimensions in inches and weight in pounds per lineal foot


**ANGLES**

Sharp Corners  
16' lengths



Equal Legs

a	b	t	lb/ft	Bars per Bundle†	Area	I	S	Cx	Cy
1/2	1/2	1/16	.070	78	.058	.001	.004	.352	
1/2	1/2	1/8	.131	40	.109	.002	.006	.330	
5/8	5/8	1/8	.168	39	.141	.005	.011	.424	
3/4	3/4	1/16	.108	47	.089	.005	.009	.540	
3/4	3/4	1/8	.206	30	.172	.009	.017	.517	
1	1	1/16	.145	40	.120	.012	.016	.727	
1	1	1/8	.281	20	.234	.022	.031	.704	
1	1	3/16	.408	15	.341	.030	.044	.682	
1 1/4	1 1/4	1/8	.356	15	.297	.044	.049	.891	
1 1/4	1 1/4	3/16	.519	11	.435	.062	.071	.869	
1 1/2	1 1/2	1/8	.431	14	.359	.078	.072	1.079	
1 1/2	1 1/2	3/16	.633	10	.529	.110	.104	1.056	
1 1/2	1 1/2	1/4	.824	7	.688	.139	.134	1.034	
1 3/4	1 3/4	1/8	.506	12	.422	.126	.099	1.266	
2	2	1/8	.581	11	.484	.190	.131	1.454	
2	2	3/16	.857	6	.717	.273	.191	1.431	
2	2	1/4	1.124	5	.938	.348	.247	1.408	
2 1/2	2 1/2	1/8	.731	8	.609	.378	.206	1.829	
3	3	1/8	.881	6	.734	.661	.300	2.203	
3	3	3/16	1.308	5	1.093	.964	.442	2.180	
3 1/2	3 1/2	1/8	1.031	6	.859	1.059	.411	2.578	
4	4	1/8	1.181	5	.984	1.591	.539	2.953	

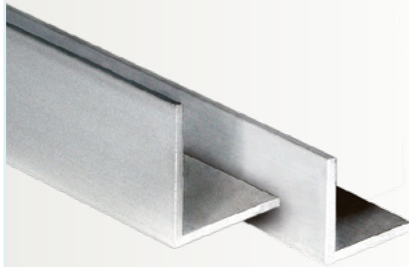

Unequal Legs

b	a	t	lb/ft	Bars per Bundle†	Area	Ix	Sx	Cx	Iy	Sy	Cy
3/8	3/4	3/32	.116	60	.096	.003	.007	.465	.001	.001	.277
1/2	1	1/8	.206	29	.172	.017	.027	.619	.003	.008	.369
1/2	1 1/4	1/8	.244	25	.203	.032	.042	.755	.003	.008	.380
1/2	1 1/2	1/8	.281	25	.234	.053	.060	.888	.003	.008	.388
1/2	2	1/8	.355	20	.297	.118	.103	1.148	.003	.008	.398
3/4	1	1/8	.244	25	.203	.020	.029	.668	.009	.017	.543
3/4	1 1/2	1/8	.319	18	.266	.061	.064	.952	.010	.018	.577
3/4	2	1/8	.394	15	.328	.136	.111	1.223	.011	.019	.598
1	1 1/2	1/8	.356	15	.300	.068	.068	1.003	.024	.032	.753
1	1 3/4	1/8	.394	16	.328	.104	.091	1.146	.025	.033	.771
1	2	1/8	.431	15	.359	.150	.117	1.285	.026	.033	.785
1	2	3/16	.633	10	.529	.215	.170	1.262	.037	.048	.762
1	2 1/2	1/8	.506	12	.422	.277	.178	1.558	.028	.034	.808
1	3	1/8	.581	10	.484	.456	.250	1.825	.029	.035	.825
1 1/4	3 1/2	1/8	.694	9	.578	.750	.347	2.160	.057	.055	1.035
1 1/2	1 3/4	1/8	.469	14	.391	.120	.097	1.233	.081	.073	1.108
1 1/2	2	1/8	.506	12	.422	.173	.125	1.382	.085	.075	1.132
1 1/2	2 1/2	1/8	.581	10	.484	.319	.191	1.671	.090	.077	1.171
2	2 1/2	1/8	.656	10	.554	.344	.194	1.779	.196	.129	1.523
2	3	1/8	.731	9	.609	.580	.282	2.053	.213	.137	1.553
2	3 1/2	1/8	.806	8	.672	.881	.377	2.339	.222	.140	1.589
2	4	1/8	.881	7	.734	1.266	.483	2.618	.229	.141	1.382
2 1/4	5 1/4	1/8	1.106	6	.992	2.749	.817	3.363	.340	.182	1.863
2 1/2	3 1/2	1/8	.881	7	.734	.951	.391	2.432	.416	.215	1.932
3	3 1/2	1/8	.956	6	.797	1.009	.402	2.511	.692	.306	2.261
3	4	1/8	1.031	6	.859	1.452	.517	2.810	.719	.311	2.310
3	5	1/8	1.181	5	.984	2.658	.784	3.390	.762	.319	2.390
4	5	1/8	1.331	5	1.109	2.924	.820	3.564	1.698	.554	3.064


†Aluminum extrusions are pre-wrapped in 100-lb paper-interleaved bundles to speed shipment and prevent damage. Quantities are subject to change without notice.

● ALUMINUM Alloy 6063-T52

All dimensions in inches and weight in pounds per lineal foot

**TEES**

Sharp Corners  
16' lengths




b	a	t	lb/ft	Bars per Bundle†	Area	Ix	Sx	Cx	Iy	Sy
3/4	3/4	1/8	.206	30	.171	.009	.017	.518	.004	.012
3/4	1 1/4	1/8	.280	20	.233	.037	.045	.814	.004	.012
1	3/4	1/8	.244	23	.202	.009	.017	.544	.010	.021
1	1	1/8	.281	20	.233	.022	.031	.705	.011	.021
1 1/8	1/2	1/8	.338	20	.282	.005	.016	.318	.020	.032
1 1/8	1 1/8	1/8	.319	19	.265	.031	.039	.924	.015	.027
1 1/4	7/8	1/8	.300	21	.249	.016	.024	.649	.020	.033
1 1/2	1 1/2	1/8	.431	12	.358	.077	.072	1.080	.035	.047
2	3/4	1/8	.394	16	.322	.010	.017	.600	.083	.083
2	2	3/16	.856	6	.717	.271	.190	1.430	.126	.126

● Item No. 6958 Table 1/8", Leg 3/8"

**ZEEES**


Sharp Corners  
16' lengths



a	b	d	t	lb/ft	Bars per Bundle†	Area	Ix	Sx	Iy	Sy
1/2	1/2	1/2	3/32	.148	40	.169	.004	.017	.006	.016
3/4	3/4	3/4	1/8	.300	21	.250	.020	.053	.027	.039
7/8	3/4	3/4	1/8	.319	20	.266	.029	.067	.027	.039
1	5/8	7/8	1/8	.337	18	.281	.056	.063	.015	.047
1	1 1/8	1 1/8	1/8	.450	14	.375	.058	.117	.100	.094

**CHANNELS**

Sharp Corners  
16' lengths, except as noted

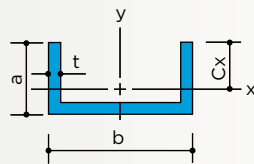

b	a	t	lb/ft	Bars per Bundle†	Area	Ix	Sx	Cx	Iy	Sy
1/2	3/8	1/8	.150	38	.128	.002	.007	.219	.004	.014
1/2	1/2	3/32	.148	35	.126	.003	.009	.348	.004	.017
1/2	3/4	1/8	.263	22	.224	.011	.027	.402	.007	.028
5/8	5/8	1/8	.244	23	.207	.007	.020	.370	.011	.034
5/8	1	1/8	.356	16	.297	.028	.050	.569	.017	.053
3/4	3/8	1/8	.187	35	.159	.002	.009	.238	.011	.028
3/4	1/2	1/8	.225	30	.191	.004	.013	.323	.014	.037
3/4	3/4	1/8	.300	20	.250	.014	.030	.453	.020	.053
1*	1/2	1/8	.263	18	.219	.005	.014	.330	.028	.057
1	5/8	1/8	.304	25	.250	.009	.022	.406	.035	.069
1	3/4	1/8	.337	20	.281	.015	.031	.479	.040	.081
1	1	1/8	.413	12	.344	.034	.055	.619	.053	.105
1*	2	1/8	.713	8	.594	.236	.200	1.148	.101	.202
1 1/4*	1/2	1/8	.300	16	.250	.005	.015	.344	.050	.080
1 1/4*	5/8	1/8	.337	12	.281	.010	.023	.424	.060	.096
1 1/4*	3/4	1/8	.374	12	.312	.016	.032	.500	.070	.112
1 1/4	1 1/4	1/8	.526	12	.438	.069	.088	.853	.110	.176
1 1/2*	1/2	1/8	.337	16	.281	.005	.015	.354	.080	.106
1 1/2*	5/8	1/8	.374	12	.312	.010	.023	.437	.094	.126
1 1/2	3/4	1/8	.413	16	.344	.017	.033	.517	.109	.146
1 1/2	1	1/8	.487	12	.406	.039	.059	.668	.139	.185
1 1/2	1 1/2	1/8	.637	8	.531	.123	.129	.952	.198	.264
1 3/4	1/2	1/8	.374	15	.312	.005	.015	.362	.118	.135
1 3/4	3/4	1/8	.450	12	.375	.018	.034	.531	.159	.182
1 3/4	1	1/8	.524	12	.438	.042	.060	.688	.200	.229
2	1/2	1/8	.413	14	.344	.006	.015	.369	.166	.166
2	1	1/8	.564	8	.469	.043	.062	.704	.276	.276
2	2	1/8	.863	6	.719	.301	.234	1.285	.496	.496
2 1/4	7/8	1/8	.563	11	.469	.031	.048	.637	.331	.294
2 1/2	3/4	1/8	.564	10	.469	.020	.036	.562	.383	.307
2 1/2	1 1/2	1/8	.787	8	.656	.147	.140	1.045	.648	.518
2 1/2	2 1/2	1/8	1.062	6	.906	.599	.370	1.619	1.001	.801
3	1/2	1/8	.563	11	.469	.006	.017	.387	.475	.317
3	1	1/8	.713	8	.594	.049	.065	.753	.734	.489
3	2	1/8	.955	6	.844	.346	.250	1.382	1.250	.834
3	3	1/8	1.293	4	1.094	1.050	.538	1.952	1.767	1.178
4	1 1/2	1/8	1.013	6	.844	.169	.150	1.132	1.960	.979
4 1/2	1 1/2	1/8	1.090	4	.906	.174	.152	1.157	2.698	1.199
4 1/2**	2	1/8	1.238	4	1.031	.394	.265	1.483	3.190	1.420
5	2	3/16	1.940	2	1.621	.584	.393	1.486	5.900	2.360

\* 20' lengths \*\* For glass block


†Aluminum extrusions are pre-wrapped in 100-lb paper-interleaved bundles to speed shipment and prevent damage. Quantities are subject to change without notice

● ALUMINUM Alloy 6063-T52, except as noted

All dimensions in inches and weight in pounds per lineal foot

**ROUND CORNER BARS**


20' lengths

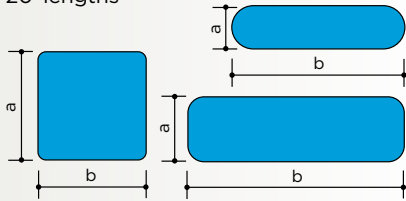

		a	b	Corner Radius	lb/ft	Bars per Bundle†	Area	I <sub>x</sub>	S <sub>x</sub>	I <sub>y</sub>	S <sub>y</sub>
● 6988	Oval	1/2	2	1/4	1.138	4	.946	.019	.075	.285	.285
● 6939	Rect.	3/4	2 1/2	3/16	2.214	2	1.845	.085	.225	.932	.746
● 6986	Rect.	3/4	3	1/8	2.684	2	2.237	.104	.277	1.658	1.106
● 6423	Square	1 1/4	1 1/4	3/32	1.876	2	1.555	.201	.321	.201	.321
● 6424	Rect.	1 1/4	2 3/4	3/32	4.124	1	3.430	.445	.712	2.153	1.566

**EXTRUDED HANDRAIL PIPE**

20' lengths



Nominal Size	Sched.	OD	ID	t	lb/ft	Bars per Bundle†	Area	I	S	r
3/4	40	1.050	.824	.113	.391	14	.333	.037	.071	.334
1	40	1.315	1.049	.133	.581	9	.494	.087	.133	.421
1 1/4*	10	1.660	1.442	.109	.625	6	.531	.161	.193	.550
1 1/4*	40	1.660	1.380	.140	.785	6	.669	.195	.235	.540
1 1/2*	10	1.900	1.682	.109	.721	5	.614	.247	.260	.634
1 1/2*	40	1.900	1.610	.145	.940	5	.800	.310	.326	.623
2	40	2.375	2.067	.154	1.264	3	1.075	.666	.561	.787


\* Carried in stock with mill finish and with a clear anodized – AA-M10-C22-A31 (204R1) – finish.

This pipe is of tubing quality and has a smooth, clean surface and close dimensional tolerances which make it suitable for architectural work and for anodizing. It is easy to bend. Pipe is furnished and carefully wrapped for protection in handling and shipping. See pages 16-31 for stock pipe fittings.

**DRAWN HANDRAIL PIPE**

Alloy 6063-T832

20' lengths



Nominal Size	Sched.	OD	ID	t	lb/ft	Area	I	S	r
1 1/4*	10	1.660	1.442	.109	.625	.531	.161	.193	.550
1 1/4*	40	1.660	1.380	.140	.785	.669	.195	.235	.540
1 1/2*	10	1.900	1.682	.109	.721	.614	.247	.260	.634
1 1/2*	40	1.900	1.610	.145	.940	.800	.310	.326	.623




\* Carried in stock with mill finish and with a clear anodized – AA-M10-C22-A31 (204R1) – finish.

This premium quality drawn pipe has an extra smooth surface. Its harder temper gives it high strength. See pages 16-31 for stock pipe fittings.

**TUBING**

Round Corner

20' lengths

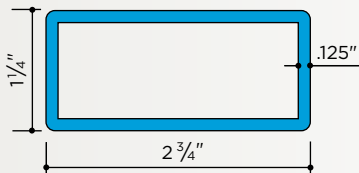

		lb/ft	Bars per Bundle†
● 6434*	Aluminum	1.123	5

		lb/ft	Bars per Bundle†
● 6435*	Aluminum	1.075	5

		lb/ft	Bars per Bundle†
● 6436*	Aluminum	.888	6

\* 6063-T6 For Elements of Section, see page 123

† Aluminum extrusions are pre-wrapped in 100-lb paper-interleaved bundles to speed shipment and prevent damage. Quantities are subject to change without notice.


● ALUMINUM Alloy 6063-T52

All dimensions in inches and weight in pounds per lineal foot

**TUBING**

**SQUARE**


Sharp Corners  
21'-1" lengths



a	b	t	lb/ft	Bars per Bundle†	Area	I	S
1/2	1/2	.062	.130	36	.109	.003	.014
5/8	5/8	.062	.167	31	.142	.007	.024
3/4	3/4	.062	.205	24	.171	.013	.036
3/4	3/4	.125	.374	10	.312	.021	.056
1	1	.062	.278	16	.233	.034	.068
1	1	.125	.525	8	.437	.057	.114
1 1/4	1 1/4	.078	.438	9	.366	.084	.134
1 1/4	1 1/4	.125	.675	8	.562	.120	.192
1 1/2	1 1/2	.078	.532	8	.444	.150	.200
1 1/2	1 1/2	.125	.825	6	.687	.218	.291
1 3/4	1 3/4	.125	.975	4	.812	.360	.411
2	2	.078	.720	6	.600	.370	.370
2	2	.125	1.124	4	.937	.552	.552
2 1/2	2 1/2	.125	1.424	3	1.187	1.119	.896
3	3	.125	1.724	2	1.437	1.984	1.323
4	4	.125	2.324	2	1.937	4.854	2.427

**RECTANGULAR**

Sharp Corners  
21'-1" lengths




a	b	t	lb/ft	Bars per Bundle†	Area	Ix	Sx	Iy	Sy
1/2	1	.125	.374	12	.312	.009	.003	.033	.066
3/4	1 1/2	.125	.588	8	.500	.040	.106	.130	.173
1	1 1/2	.125	.661	6	.562	.081	.162	.159	.212
1	2	.125	.825	6	.687	.105	.210	.332	.332
1	3	.125	1.119	4	.937	.153	.307	.950	.633
1 1/4	2 1/2	.125	1.050	4	.875	.219	.351	.678	.543
1 1/4	3	.125	1.200	4	1.000	.259	.415	1.079	.720
1 1/2	2	.125	.967	4	.812	.278	.370	.442	.442
1 1/2	2 1/2	.125	1.124	4	.937	.337	.449	.767	.613
1 1/2	3	.125	1.276	4	1.022	.384	.512	1.167	.778
1 1/2	6	.125	2.135	2	1.812	.752	1.002	7.197	2.399
1 3/4	2 1/4	.125	1.125	4	.937	.442	.505	.661	.588
1 3/4	3	.125	1.323	3	1.125	.566	.647	1.338	.892
1 3/4	3 1/2	.125	1.470	3	1.250	.649	.742	1.962	1.121
1 3/4	4	.125	1.650	3	1.375	.732	.836	2.742	1.371
1 3/4	4 1/2	.125	1.765	2	1.500	.814	.931	3.693	1.641
1 3/4	5	.125	1.910	2	1.625	.897	1.025	4.833	1.933
2	3	.125	1.395	3	1.187	.772	.772	1.467	.978
2	4	.125	1.710	3	1.438	.992	.992	2.976	1.488
2	5	.125	2.025	2	1.687	1.212	1.212	5.204	2.082
2	6	.125	2.326	2	1.937	1.432	1.432	8.276	2.759
3	5	.125	2.326	2	1.937	3.018	2.012	6.690	2.676
3	6	.188	3.882	-	3.226	5.010	3.340	15.032	5.010



**ROUND**

20' lengths




OD	t	lb/ft	Bars per Bundle†	Area	I	S
2 1/2	.125	1.119	6	.933	.659	.527
3	.125	1.330	4	1.129	1.169	.779
3 1/2	.125	1.560	2	1.325	1.890	1.080

See page 129 for fittings

**OVAL**

20' lengths

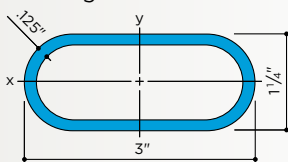

	lb/ft	Bars per Bundle†	Area	Ix	Sx	Iy	Sy
● 6437	1.057	5	.879	.210	.336	.799	.532

†Aluminum extrusions are pre-wrapped in 100-lb paper-interleaved bundles to speed shipment and prevent damage. Quantities are subject to change without notice.


TUBING, BARS, AND SHAPES

**STRUCTURAL TUBING**

Aluminum Alloy 6061-T6, 24' lengths

All dimensions in inches and weight in pounds per lineal foot


**Square**



**Square**

a	b	t	lb/ft	Area	I	S
2	2	1/8	1.126	.937	.552	.552
2	2	3/16	1.627	1.343	.743	.745
2 1/2	2 1/2	3/16	2.087	1.739	1.559	1.247
3	3	3/16	2.538	2.115	2.798	1.865
4	4	3/16	3.440	2.867	6.957	3.479

**Rectangular**




**Rectangular**

a	b	t	lb/ft	Area	Ix	Sx	Iy	Sy
2	3	3/16	2.123	1.739	1.064	1.064	2.055	1.370
2	4	3/16	2.538	2.115	1.374	1.374	4.226	2.113
3	6	3/16	3.892	3.226	5.010	3.340	15.032	5.010

● STEEL C1010

**COLD-ROLLED ANGLES**

Square Root and Square Edge  
20' lengths



**Equal Legs**


a	b	t	lb/ft	Area	I	S	Cx	Cy
1/2	1/2	1/8	.38	.109	.002	.007		.330
5/8	5/8	1/8	.48	.141	.005	.011		.424
3/4	3/4	1/16	.30	.089	.005	.009		.539
3/4	3/4	1/8	.59	.172	.009	.017		.517
1	1	1/8	.81	.234	.022	.031		.704
1	1	3/16	1.16	.341	.030	.044		.682
1 1/4	1 1/4	1/8	1.02	.297	.044	.049		.891
1 1/4	1 1/4	3/16	1.48	.435	.062	.071		.869
1 1/2	1 1/2	1/8	1.24	.359	.078	.072		1.079
1 1/2	1 1/2	3/16	1.80	.529	.110	.104		1.056
2	2	1/8	1.65	.484	.190	.131		1.454
2	2	3/16	2.44	.717	.273	.191		1.431

**Unequal Legs**

a	b	t	lb/ft	Area	Ix	Sx	Cx	Iy	Sy	Cy
1	5/8	1/8	.64	.187	.018	.029	.646	.005	.012	.163
1 1/4	3/4	1/8	.80	.234	.037	.045	.812	.010	.018	.562
1 1/2	1	1/8	1.01	.297	.068	.068	1.003	.024	.032	.753
2	1	1/8	1.23	.359	.149	.116	1.285	.026	.033	.785

**COLD-ROLLED CHANNELS**

Square Root and Square Edge  
20' lengths, except as noted



**Equal Sides**

	b	a	t	lb/ft	Area	Ix	Sx	Cx	Iy	Sy
● 4730	1/2	1/2	.093	.40	.122	.003	.010	.299	.004	.016
● 4732	3/4	3/4	.093	.57	.192	.011	.023	.465	.017	.044
● 4734	1	1	.109	1.03	.303	.030	.049	.625	.048	.096
● 4744	1 1/4	1 1/4	.109	1.32	.385	.061	.078	.792	.099	.158
● 4750	1 1/2	1 1/2	.109	1.59	.467	.109	.114	.958	.178	.237
● 4752	2	2	.125	2.41	.719	.309	.240	1.285	.496	.496


**Unequal Sides**

	b	a	t	lb/ft	Area	Ix	Sx	Cx	Iy	Sy
● 4735*	5/8	5/16	.078	.29	.085	.001	.003	.206	.004	.014
● 4736*	3/4	3/8	.083	.40	.111	.001	.005	.252	.008	.022
● 4753	2 3/8	2 3/16	.156	3.41	1.005	.499	.351	1.420	1.880	1.583
● 4754	1 1/2	1	.109	1.22	.358	.035	.052	.674	.117	.155
● 4759	1 3/4	1 1/8	.109	1.40	.412	.052	.067	.768	.198	.226
● 4760	2	1	.125	1.59	.469	.044	.062	.704	.276	.276

\* 22' lengths

**HOT-ROLLED TEES**


20' lengths



	a	b	t	lb/ft
● 4724	1	1	1/8	.90

**HOT-ROLLED ZEES**

Square Root  
20' lengths





	a	b	c	lb/ft
● 4721	1 3/16	5/8	3/4	.94

● BRONZE Alloy C38500

All dimensions in inches and weight in pounds per lineal foot

**ANGLES**

Sharp Corners  
20' lengths, except as noted

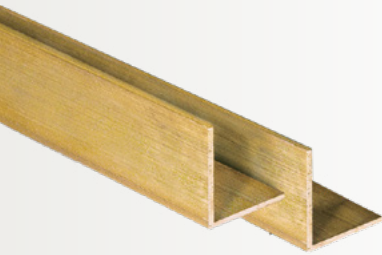

Equal Legs

a	b	t	lb/ft	Area	Ix	Sx	Cx	Cy
1/2	1/2	1/8	.42	.109	.002	.006		.330
5/8	5/8	1/8	.52	.141	.005	.011		.424
3/4	3/4	1/8	.64	.172	.009	.017		.517
1	1	1/8	.89	.234	.022	.031		.704
1	1	3/16	1.24	.341	.030	.044		.682
1 1/4	1 1/4	1/8	1.09	.297	.044	.049		.891
1 1/4	1 1/4	3/16	1.60	.435	.062	.071		.869
1 1/4	1 1/4	1/4	2.05	.562	.077	.091		.847
1 1/2	1 1/2	1/8	1.35	.359	.078	.072		1.079
1 1/2	1 1/2	3/16	1.92	.529	.110	.104		1.056
1 1/2	1 1/2	1/4	2.52	.688	.139	.134		1.034
2	2	1/8	1.79	.484	.190	.131		1.454
2	2	3/16	2.61	.717	.273	.191		1.431
2	2	1/4	3.37	.938	.348	.247		1.408
2 1/2	2 1/2	1/8	2.24	.609	.378	.206		1.829
2 1/2	2 1/2	1/4	4.33	1.187	.703	.394		1.783
3*	3	1/4	5.25	1.437	1.244	.577		2.160

\* 16' lengths


Unequal Legs

a	b	t	lb/ft	Area	Ix	Sx	Cx	Iy	Sy	Cy
3/4	3/8	1/8	.45	.125	.007	.015	.453	.001	.004	.266
1	1/2	1/8	.65	.172	.017	.027	.619	.003	.008	.369
1	3/4	1/8	.75	.203	.020	.029	.668	.009	.017	.543
1 1/4	3/4	1/8	.88	.234	.037	.045	.812	.010	.018	.562
1 1/2	3/4	1/8	.97	.266	.061	.064	.952	.010	.018	.577
1 1/2	1	1/8	1.10	.300	.068	.068	1.003	.024	.032	.753
2	1	1/8	1.33	.359	.150	.117	1.285	.026	.033	.785
3*	2	1/4	4.32	1.187	1.087	.542	2.007	.392	.260	1.507
4*	2 1/2	1/4	5.70	1.562	2.602	.973	2.675	.805	.418	1.925

\* 16' lengths

**CHANNELS**

Sharp Corners  
20' lengths



Equal Sides


b	a	t	lb/ft	Area	Ix	Sx	Cx	Iy	Sy
1/2	1/2	3/32	.44	.126	.003	.009	.348	.004	.017
3/4	3/4	1/8	.90	.250	.014	.030	.453	.020	.053
1	1	1/8	1.25	.344	.034	.055	.619	.053	.105
1 1/4	1 1/4	1/8	1.60	.438	.069	.088	.853	.110	.176
1 1/2	1 1/2	1/8	1.94	.531	.123	.129	.952	.198	.264

Unequal Sides

b	a	t	lb/ft	Area	Ix	Sx	Cx	Iy	Sy
5/8	5/16	3/32	.36	.099	.001	.004	.201	.005	.015
3/4	3/8	1/8	.57	.159	.002	.009	.238	.011	.028
1	1/2	1/8	.85	.219	.005	.014	.330	.028	.057
1	3/4	1/8	1.04	.281	.015	.031	.479	.040	.081
1 1/4	1/2	1/8	.91	.250	.005	.015	.344	.050	.080
1 1/4	5/8	1/8	1.06	.281	.010	.023	.424	.060	.096
1 1/2	1/2	1/8	1.02	.281	.005	.015	.354	.080	.106
1 1/2	5/8	1/8	1.12	.312	.010	.023	.437	.094	.126
1 1/2	1	1/8	1.47	.406	.039	.059	.668	.139	.185
2	3/4	1/8	1.47	.406	.025	.039	.543	.221	.221
2 1/4	7/8	1/8	1.75	.469	.031	.048	.637	.331	.294
2 1/2	1	1/8	1.94	.531	.046	.064	.732	.471	.377

**TEES**

Sharp Corners  
20' lengths




Tees

b	a	t	lb/ft	Area	Ix	Sx	Cx	Iy	Sy
3/4	3/4	1/8	.64	.171	.009	.017	.518	.004	.012
1	1	1/8	.89	.233	.022	.031	.705	.011	.021
1 1/2	1 1/2	1/8	1.35	.358	.077	.072	1.080	.035	.047
1 1/2	1 1/2	3/16	1.94	.529	.110	.104	1.056	.054	.071
2	2	3/16	2.61	.717	.271	.190	1.430	.126	.126

All dimensions in inches and weight in pounds per lineal foot

**FLAT BARS**

Sharp Corners  
16' lengths, except as noted




a	b	lb/ft	Area	I <sub>x</sub>	S <sub>x</sub>	I <sub>y</sub>	S <sub>y</sub>
1/8	1/2	.23	.063	.000	.001	.001	.005
1/8	5/8	.29	.078	.000	.002	.003	.008
1/8	3/4	.35	.094	.000	.002	.004	.012
1/8	1	.46	.125	.000	.003	.010	.020
1/8	1 1/4	.58	.156	.000	.003	.020	.032
1/8	1 1/2	.69	.188	.000	.004	.035	.047
1/8	2	.92	.250	.000	.005	.083	.083
1/8	3	1.38	.375	.000	.008	.281	.187
3/16	1/2	.35	.094	.000	.002	.002	.008
3/16	5/8	.43	.118	.000	.004	.004	.012
3/16	3/4	.52	.141	.000	.004	.007	.018
3/16	1	.69	.188	.001	.006	.016	.032
3/16	1 1/2	1.04	.282	.001	.009	.053	.071
3/16	2	1.38	.376	.001	.012	.125	.125
3/16	2 1/2	1.73	.470	.001	.015	.244	.195
3/16	3	2.08	.564	.002	.018	.422	.281
3/16	3 1/2	2.42	.658	.002	.021	.670	.383
3/16	4	2.76	.752	.002	.023	1.000	.500
1/4	3/8	.34	.094	.000	.004	.001	.006
1/4	1/2	.46	.125	.001	.005	.003	.010
1/4	5/8	.58	.156	.001	.007	.005	.016
1/4	3/4	.69	.188	.001	.008	.009	.023
1/4	1	.92	.250	.001	.008	.021	.042
1/4	1 1/4	1.15	.313	.002	.016	.041	.066
1/4	1 1/2	1.38	.375	.002	.016	.070	.093
1/4	2	1.84	.500	.003	.024	.167	.167
1/4	2 1/2	2.30	.625	.003	.024	.326	.261
1/4	3	2.77	.750	.004	.032	.563	.375
1/4	4	3.87	1.000	.005	.040	1.333	.667
5/16†	6	6.67	1.875	.015	.096	5.625	1.875
3/8	1/2	.68	.188	.002	.012	.004	.016
3/8	5/8	.87	.234	.003	.015	.008	.024
3/8	3/4	1.04	.281	.003	.018	.013	.035
3/8	1	1.38	.375	.004	.021	.031	.062
3/8	1 1/4	1.73	.469	.005	.027	.061	.098
3/8	1 1/2	2.07	.563	.007	.037	.106	.141
3/8	2	2.76	.750	.009	.048	.250	.250
3/8	2 1/2	3.42	.938	.011	.059	.488	.390
3/8	3	4.11	1.125	.013	.069	.844	.563
3/8	4	5.53	1.500	.018	.096	2.000	1.000
1/2	3/4	1.37	.375	.008	.031	.018	.047
1/2	1	1.84	.500	.010	.040	.042	.084
1/2	1 1/4	2.28	.625	.013	.052	.081	.130
1/2	1 1/2	2.76	.750	.016	.064	.141	.188
1/2	1 3/4	3.22	.875	.018	.072	.223	.225
1/2	2	3.68	1.000	.021	.084	.333	.333
1/2	2 1/2	4.60	1.250	.026	.104	.651	.520
1/2	3	5.48	1.500	.031	.124	1.125	.750
1/2	4	7.36	2.000	.042	.168	2.667	1.333
3/4	1	2.74	.750	.035	.094	.063	.125
3/4	1 1/4	3.46	.940	.044	.117	.122	.195
3/4	1 1/2	4.11	1.125	.053	.141	.210	.281
3/4	2	5.53	1.500	.070	.188	.500	.500
1	1 1/4	4.56	1.250	.104	.208	.163	.261

†8' lengths

**ROUND BARS**

16' lengths, except as noted




a	lb/ft	Area	I	S
3/8	.41	.110	.001	.005
1/2	.72	.196	.003	.012
5/8	1.13	.307	.008	.024
3/4	1.63	.442	.016	.041
7/8*	2.22	.601	.029	.066
1	2.89	.785	.049	.098
1 1/8	3.66	.994	.079	.140
1 1/4	4.52	1.227	.120	.192
1 1/2	6.51	1.767	.249	.331
1 3/4	8.86	2.405	.460	.526
2*	11.57	3.142	.785	.785
2 1/2	18.00	4.906	1.917	1.530
3**	26.10	7.069	3.974	2.649
3 1/2***	35.00	9.621	7.362	4.209

\* 12' lengths \*\* 10' lengths \*\*\* random lengths



**SQUARE BARS**

Sharp Corners  
16' lengths, except as noted



a	b	lb/ft	Area	I	S
1/4	1/4	.23	.063	.000	.003
3/8	3/8	.52	.141	.002	.009
1/2	1/2	.92	.250	.005	.021
5/8	5/8	1.44	.391	.013	.041
3/4	3/4	2.08	.563	.026	.070
1	1	3.69	1.000	.083	.167
1 1/4	1 1/4	5.76	1.563	.204	.326
1 1/2	1 1/2	8.28	2.250	.422	.563
2	2	14.76	4.000	1.333	1.333
2 1/2**	2 1/2	23.06	6.250	3.255	2.604


\*\* 10' lengths

● BRONZE Alloy C38500, except as noted

All dimensions in inches and weight in pounds per lineal foot

**TUBING**


SQUARE  
Sharp Corners  
16' lengths



a	b	t	lb/ft	Area	I	S
1/2	1/2	.093	.56	.151	.004	.018
5/8	5/8	.093	.73	.198	.010	.031
3/4	3/4	.093	.90	.244	.018	.048
1	1	.100	1.32	.360	.049	.098
1 1/4	1 1/4	.100	1.70	.460	.102	.163
1 1/2	1 1/2	.100	2.07	.560	.184	.245
1 3/4	1 3/4	.100	2.43	.660	.300	.344
2	2	.125	3.46	.937	.552	.552
2 1/2	2 1/2	.100	3.48	.960	.923	.740
3	3	.125*	5.27	1.437	1.984	1.323

\* Rounded inside corners, r = 1/4"


RECTANGULAR  
Sharp Corners  
16' lengths



a	b	t	lb/ft	Area	Ix	Sx	Iy	Sy
1/2	1	.100	.95	.260	.009	.034	.029	.058
3/4	1 1/2	.100	1.50	.410	.035	.093	.110	.147
1	1 1/2	.100	1.70	.460	.070	.139	.135	.180
1 1/2	2	.100	1.70	.460	.017	.068	.252	.252
1	2	.100	2.07	.560	.090	.180	.278	.278
1 1/4	2 1/2	.125	3.23	.875	.219	.351	.678	.543
1	3	.125	3.46	.937	.153	.307	.950	.633
1 1/4	3	.125	3.69	1.000	.259	.415	1.071	.720
1 1/2	3	.125	3.88	1.022	.384	.512	1.167	.778
1 3/4	3	.125	4.15	1.125	.566	.647	1.338	.892
2**	3	.125	4.48	1.187	.772	.772	1.467	.978
1 3/4	4	.125	5.28	1.375	.732	.836	2.742	1.371

\*\*12' lengths


ROUND  
20' lengths, except  
as noted



OD	t	lb/ft	Area	I	S
1 1/2 ●	.100	1.75	.440	.108	.144
1.900	.100	2.07	.565	.230	.242
2 1/2	.125	3.44	.933	.659	.527
3	.125	4.50	1.129	1.169	.779
3 1/2 *	.125	4.85	1.325	1.890	1.080

● Item No. 6489 \*16' lengths


OVAL  
16' lengths



	lb/ft	Area	Ix	Sx	Iy	Sy
● 6488 Bronze	1.56	.426	.011	.044	.152	.152

**HANDRAIL PIPE**


Red Brass Alloy C23000  
Standard Pipe Sizes, 20' lengths



Nominal Pipe Size	Sched.	OD	ID	t	lb/ft	Area	I	S	r
1 1/4	40	1.660	1.368	.146	2.63	.695	.201	.242	.538
1 1/2	40	1.900	1.600	.150	3.13	.825	.318	.335	.621

This pipe is furnished with plain ends, unmarked, and with a smooth finish suitable for polishing. See pages 16-27 for stock pipe fittings.

All dimensions in inches and weight in pounds per lineal foot


**ANGLES**Sharp Corners  
20' lengths

## Equal Legs


a	b	t	lb/ft	Area	I	S	Cx	Cy
3/4	3/4	1/8	.45	.125	.007	.015		.453
1	1	1/8	.89	.234	.022	.031		.704
1 1/2	1 1/2	1/8	1.35	.359	.078	.072		1.079
1 1/2	1 1/2	1/4	2.52	.688	.139	.134		1.034

## Unequal Legs

a	b	t	lb/ft	Area	Ix	Sx	Cx	Iy	Sy	Cy
2	1	1/8	1.33	.359	.150	.117	1.285	.026	.033	.785

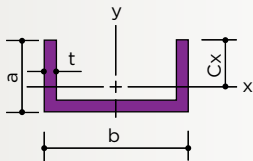**CHANNELS**Sharp Corners  
20' lengths


b	a	t	lb/ft	Area	Ix	Sx	Cx	Iy	Sy
1/2	1/2	3/32	.44	.126	.003	.009	.348	.004	.017
3/4	3/4	1/8	.90	.250	.014	.030	.453	.020	.053
1 1/4	1 1/2	1/8	.91	.250	.005	.015	.344	.050	.080
1 1/2	1 1/2	1/8	1.02	.281	.005	.015	.354	.080	.106

**FLAT BARS**Sharp Corners  
16' lengths, except as noted

a	b	lb/ft	Area	Ix	Sx	Iy	Sy
1/8	1 1/4	.58	.156	.000	.003	.020	.032
1/8	1 1/2	.69	.188	.000	.004	.035	.047
1/4	3/4	.69	.188	.001	.008	.009	.023
1/4	1	.92	.250	.001	.008	.021	.042
1/4	1 1/4	1.15	.313	.002	.016	.041	.066
1/4	2	1.84	.500	.003	.024	.167	.167
1/4	3	2.77	.750	.004	.032	.563	.375
3/8	3/4	1.04	.281	.003	.018	.013	.035
3/8	1	1.38	.375	.004	.021	.031	.062
3/8	1 1/4	1.73	.469	.005	.027	.061	.098
3/8	1 1/2	2.07	.563	.007	.037	.106	.141
3/8	2	2.76	.750	.009	.048	.250	.250
3/8	3	4.11	1.125	.013	.069	.844	.563
5/16†	6	6.67	1.875	.015	.096	5.625	1.875
1/2	3/4	1.37	.375	.008	.031	.018	.047
1/2	1 1/2	2.76	.750	.016	.064	.141	.188
1/2	2	3.68	1.000	.021	.084	.333	.333
1/2	3	5.48	1.500	.031	.124	1.125	.750
3/4	1	2.74	.750	.035	.094	.063	.125
3/4	1 1/2	4.11	1.125	.053	.141	.210	.281
3/4	2	5.53	1.500	.070	.188	.500	.500

**ROUND BARS**

16' lengths, except as noted



a	lb/ft	Area	I	S
1/2	.72	.196	.003	.012
5/8	1.13	.307	.008	.024
3/4	1.63	.442	.016	.041
7/8	2.22	.601	.029	.066
1	2.89	.785	.049	.098
1 1/4	4.52	1.227	.120	.192
1 1/2	6.51	1.767	.249	.331
1 5/8	7.50	2.074	.342	.421
2*	11.57	3.142	.785	.785
3**	26.10	7.069	3.974	2.649
3 1/2†	35.00	9.621	7.362	4.209


\* 12' lengths, \*\* 10' lengths, † 8' lengths

● NICKEL-SILVER Alloy C79800 Mill Finish, except as noted

All dimensions in inches and weight in pounds per lineal foot

**SQUARE BARS**

Sharp Corners  
16' lengths, except as noted




a	b	lb/ft	Area	I	S
1/2	1/2	.92	.250	.005	.021
3/4	3/4	2.08	.563	.026	.070
1	1	3.69	1.000	.083	.167
1 1/4	1 1/4	5.76	1.563	.204	.326
1 1/2**	1 1/2	8.28	2.250	.422	.563

\*\* 10' lengths

**TUBING**


**Square**  
Sharp Corners  
16' lengths



a	b	t	lb/ft	Area	I	S
3/4	3/4	.093	.90	.244	.018	.048
1	1	.100	1.32	.360	.049	.098
1 1/4	1 1/4	.100	1.70	.460	.102	.163
1 1/2	1 1/2	.100	2.07	.560	.184	.245
2	2	.100	2.83	.760	.458	.459

**Rectangular**

Sharp Corners  
16' lengths




a	b	t	lb/ft	Area	I <sub>x</sub>	S <sub>x</sub>	C <sub>x</sub>	I <sub>y</sub>	S <sub>y</sub>	C <sub>y</sub>
3/4	1 1/2	.100	1.50	.410	.035	.093	-	.110	.147	-
1	2	.100	2.07	.560	.090	.180	-	.278	.278	-
1 1/4 ●	2 3/4	.125	3.40	.930	.237	.379	.625	.851	.619	1.375
1 1/2	3	.125	3.88	1.022	.384	.512	-	1.167	.778	-
1 3/4	3	.125	4.15	1.125	.566	.647	-	1.338	.892	-
1 3/4	4	.125	5.28	1.375	.732	.836	-	2.742	1.371	-

● Item No. 1334 Rounded Corners

**Round**

16' lengths, except as noted




OD	t	lb/ft	Area	I	S
1 1/2* ●	.100	1.75	.440	.108	.144
1.900* ●	.109	2.25	.721	.641	.247
2 1/2	.125	3.44	.933	.659	.527
3	.125	4.50	1.129	1.169	.779

● Item No. 5289\* 20' lengths

**Oval**

20' lengths

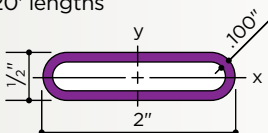


	lb/ft	Area	I <sub>x</sub>	S <sub>x</sub>	I <sub>y</sub>	S <sub>y</sub>
● 5288 Nickel-Silver	1.56	.426	.011	.044	.152	.152

● STAINLESS Type 304 (18-8) Mill Finish, smooth surface, suitable for polishing

All dimensions in inches and weight in pounds per lineal foot

**ROLLED ANGLES**


20' lengths



a	b	t	lb/ft	Area	I	S	Cx	Cy
1/2	1/2	.062	.192	.058	.001	.004	.352	
5/8	5/8	.062	.247	.074	.003	.006	.446	
3/4	3/4	.062	.296	.089	.005	.009	.539	
3/4	3/4	.125	.596	.172	.009	.017	.517	
1	1	.062	.410	.120	.012	.016	.727	
1	1	.125	.808	.234	.022	.031	.704	
1 1/4	1 1/4	.062	.507	.151	.023	.025	.914	
1 1/4	1 1/4	.125	1.020	.297	.044	.049	.891	
1 1/2	1 1/2	.062	.605	.182	.041	.037	1.102	
1 1/2	1 1/2	.125	1.240	.359	.078	.072	1.079	

**ROLLED CHANNELS**

20' lengths, except as noted




b	a	t	lb/ft	Area	Ix	Sx	Cx	Iy	Sy
1/2	1/2	.062	.284	.085	.002	.007	.310	.003	.013
5/8*	5/16	.078	.293	.085	.001	.003	.206	.004	.014
3/4	3/8	.062	.279	.085	.001	.004	.259	.001	.003
3/4	3/4	.062	.451	.132	.015	.024	.621	.012	.033
1	1/2	.062	.385	.116	.003	.007	.350	.017	.034
1	1	.062	.591	.178	.019	.029	.643	.031	.062
1 1/4	1/2	.062	.452	.132	.003	.008	.366	.029	.047
1 1/2	1/2	.062	.492	.147	.003	.008	.377	.046	.061

\* 22' lengths

**TRUE BARS**

Sharp Corners  
12' to 14' lengths



a	b	lb/ft	Area	Ix	Sx	Iy	Sy
3/16	3/4	.478	.141	.000	.004	.007	.018
3/16	1	.638	.188	.001	.006	.016	.032
3/16	1 1/4	.797	.235	.001	.007	.031	.050
3/16	1 1/2	.957	.282	.001	.009	.053	.071
3/16	2	1.280	.376	.001	.012	.125	.125
3/16	3	1.990	.564	.002	.018	.422	.281
1/4	3/4	.636	.188	.001	.008	.009	.023
1/4	1	.850	.250	.001	.008	.021	.042
1/4	1 1/4	1.060	.313	.002	.016	.041	.066
1/4	1 1/2	1.280	.375	.002	.016	.070	.093
1/4	2	1.700	.500	.003	.024	.167	.167
1/4	2 1/2	2.120	.625	.003	.024	.326	.261
1/4	3	2.550	.750	.004	.032	.563	.375
1/4	4	3.400	1.000	.005	.040	1.333	.667
3/8	1	1.280	.375	.004	.021	.031	.062
3/8	1 1/4	1.590	.469	.005	.027	.061	.098
3/8	1 1/2	1.920	.563	.007	.037	.106	.141
3/8	2	2.550	.750	.009	.048	.250	.250
3/8	2 1/2	3.190	.938	.011	.059	.488	.390
3/8	3	3.830	1.125	.013	.069	.844	.563
3/8	4	5.100	1.500	.018	.096	2.000	1.000
1/2	3/4	1.280	.375	.008	.031	.018	.047
1/2	1	1.700	.500	.010	.040	.042	.084
1/2	1 1/2	2.550	.750	.016	.064	.141	.188
1/2	2	3.400	1.000	.021	.084	.333	.333
1/2	2 1/2	4.250	1.250	.026	.104	.651	.520
1/2	3	5.100	1.500	.031	.124	1.125	.750
1/2	4	6.800	2.000	.042	.168	2.667	1.333
3/4	1	2.550	.750	.035	.094	.063	.125
3/4	1 1/2	3.830	1.125	.053	.141	.210	.281
3/4	2	5.100	1.500	.070	.188	.500	.500
3/4	3	7.650	2.250	.106	.281	1.688	1.125
1	1 1/2	5.100	1.500	.125	.250	.281	.375




● STAINLESS Type 304 (18-8) Mill Finish, smooth surface, suitable for polishing

All dimensions in inches and weight in pounds per lineal foot

**ROUND BARS**

12'-14' lengths




a	lb/ft	Area	I	S
3/8	.378	.110	.001	.005
1/2	.671	.196	.003	.012
9/16*	.850	.249	.005	.018
5/8	1.050	.307	.008	.024
3/4	1.510	.442	.016	.041
7/8*	2.060	.601	.029	.066
1*	2.680	.785	.049	.098
1 1/4*	4.200	1.227	.120	.192

\*Type 303

**SQUARE BARS**


Sharp Corners  
12'-14' lengths



a	b	lb/ft	Area	I	S
1/2	1/2	.855	.250	.005	.021
5/8	5/8	1.330	.391	.013	.041
3/4	3/4	1.920	.563	.026	.070
1	1	3.420	1.000	.083	.167
1 1/4	1 1/4	5.310	1.563	.204	.326

**HANDRAIL PIPE**

Cold-rolled Ornamental Grade  
20' lengths  
No. 4 Finish, 180 grit,  
paper-wrapped




Nominal Pipe Size	Sched.	OD	t	lb/ft	Area	I	S	r
3/4	40	1.050	.113	1.200	.333	.037	.071	.334
1	40	1.315	.120	1.460	.494	.087	.133	.421
1 1/4	5	1.660	.062	1.110	.326	.104	.125	.564
1 1/4	40	1.660	.148	2.150	.669	.195	.235	.540
1 1/2	5	1.900	.062	1.274	.375	.158	.166	.649
1 1/2	40	1.900	.148	2.550	.800	.310	.326	.623

**TUBING**

**Square**


Ornamental Grade  
20' lengths



a	b	t	lb/ft	Area	I	S
3/4	3/4	.049	.472	.137	.011	.030
1	1	.062	.835	.234	.034	.069
1 1/4	1 1/4	.062	1.058	.297	.070	.112
1 1/2	1 1/2	.062	1.281	.359	.124	.166
1 3/4	1 3/4	.062	1.505	.422	.200	.230
2	2	.062	1.728	.484	.303	.304

**Rectangular**

Ornamental Grade  
20' lengths, except as noted




a	b	t	lb/ft	Area	Ix	Sx	rx	Iy	Sy	ry
3/4	1 1/2	.062	.946	.266	.025	.066	.305	.076	.101	.533
1	1 1/2	.062	1.048	.297	.048	.096	.403	.092	.122	.556
1	2	.062	1.281	.359	.062	.124	.415	.186	.186	.719
1	3	.062	1.728	.484	.089	.179	.430	.517	.345	1.033
1 1/4	2 1/2	.062	1.616	.453	.125	.200	.525	.372	.297	.906
1 3/4*3		.062	2.062	.578	.312	.356	.734	.720	.480	1.116
1 3/4*4		.062	2.683	.703	.401	.458	.755	1.454	.727	1.438

\*21'-1" lengths

**Round**


Ornamental Grade  
20' lengths



OD	ID	lb/ft	Area	I	S
2 1/2	2.375	1.691	.497	.369	.295
3	2.875	1.930	.577	.622	.415
4	3.875	2.550	.804	1.556	.778

**Oval**

Ornamental Grade  
20' lengths



	lb/ft	Area	Ix	Sx	Iy	Sy
● 4488	.944	.284	.011	.046	.107	.107

Availability of complete structural information enables architects and designers to make proper use of Blum's component systems to provide safe, durable handrail installations. The designer can engineer installations to conform to specific building code loading criteria or can establish design requirements for a given installation on the basis of anticipated traffic exposure.

The five major considerations for the structural designs of handrails are:

1. Structural loading criteria as established by governing building codes or special design requirements.
2. Properties of railing materials and allowable stresses for design.
3. Elements of sections for railing components.
4. Load, stress, and deflection relationships expressed as formulas for engineering design.
5. Proper attachment and sound supporting structure.

#### CODE REQUIREMENTS AND REGULATIONS


Structural requirements for railings are usually expressed in one of two ways, depending on governing codes and regulations. Some of these specify an applied loading distributed uniformly along the rail while others specify loading concentrated on the top rail. The designer should consult governing codes, local ordinances, project specifications and regulatory authorities to determine requirements for compliance.

The Americans with Disabilities Act (ADA): Refer to page 3 for information regarding handrail dimensions mentioned in the ADA Accessibility Guidelines and ANSI 117.1-17.

#### ALLOWABLE STRESSES

To provide adequate safety factors, the engineering profession assigns to each material an allowable design stress, which is usually expressed as a specific fraction of minimum yield, or sometimes as a smaller fraction of minimum ultimate strength. Allowable stresses vary with the composition and temper of the material and also, to some degree, with the kind of shape and the direction of stress.

Yield strength is the point of stress (in pounds per square inch) at which material fails to return to its original position after the stress has been removed and takes a permanent set. Minimum yield is defined as the test value exceeded by 99% of a large number of specimens. For non-ferrous metals, the yield point is arbitrarily defined as the point of stress at which permanent set is a specific fraction of 1% of the length of the test piece (0.2% offset as shown below or 0.5% elongation). Ultimate strength is considerably higher (see graph).

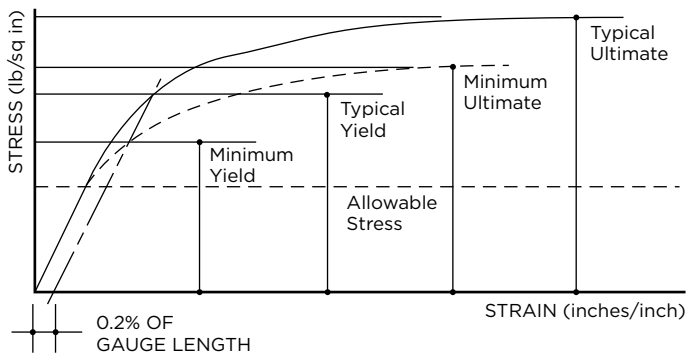

#### ELEMENTS OF SECTIONS


Properties of sections of JB® handrail mouldings, posts, and support sections are listed on page 123. For properties of bars, shapes and tubes, see pages 106-121.

#### MECHANICAL PROPERTIES OF MATERIALS

Below is a table of metals used in the architectural components described in this catalog, together with their yields, allowable stresses, and moduli of elasticity. These mechanical properties have been established by producers of the various materials.

Material	Allowable Bending Stress for Design (psi)	Expected Minimum Yield (psi)	Modulus of Elasticity (psi x 10 <sup>6</sup> )
● Aluminum 6061-T6, shapes	19,500	35,000	10.0
major axis shapes	27,700	35,000	10.0
minor axis			
● Aluminum 6063-T6, shapes	15,200	25,000	10.0
major axis shapes	19,700	25,000	10.0
minor axis			
● Aluminum 6063-T52, bars and shapes	12,600	16,000	10.0
● Aluminum 6063-T52, tubing	11,300	16,000	10.0
● Aluminum 6063-T832, drawn pipe	24,800	35,000	10.0
● Bronze C38500, extruded	9,700	16,000	14.0
● Bronze C38500, handrail moulding and tubing	14,500	24,000	14.0
● Bronze C38500, rectangular tubing, bars, and shapes	21,200	35,000	14.0
● Red Brass C23000, drawn pipe, ASTM B43	11,000	18,000	17.0
● Nickel-Silver C79800, extruded	24,000	40,000	18.0
● Stainless Steel type 304, extruded, ASTM A276	15,000	25,000	28.0
● Stainless Steel type 304, hot-rolled, ASTM A276	18,000	30,000	28.0
● Stainless Steel type 304, cold-formed	15,100	28,000	28.0
● Stainless Steel type 304 round tubing (as welded)	30,000	55,000	28.0
● Carbon Steel C1010, roll-formed, ASTM A29	16,800	28,000	29.0

#### LOADING DIAGRAM

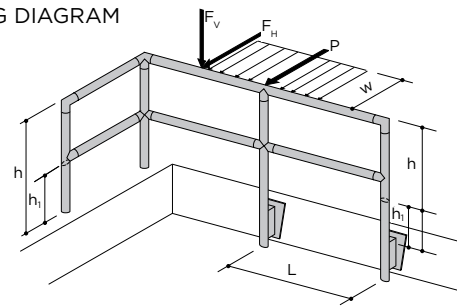


#### EXPLANATION OF SYMBOLS

w	= Uniform horizontal loading, perpendicular to the rail (lb/ft).
L	= Span between centerlines of posts or brackets (in.).
P	= Horizontal force, perpendicular to rail applied at top of post (lb).
F <sub>H</sub>	= Horizontal force, perpendicular to rail at any point along the railing (lb).
F <sub>V</sub>	= Vertical force, perpendicular to rail at any point between posts (lb).
h	= Height of post. Distance from point of load application above top of attachment (in.).
h <sub>i</sub>	= Distance from top of post attachment to top of reinforcing insert (in.).
M	= Bending moment (in.-lb).
f	= Unit stress (psi)
f <sub>s</sub>	= Allowable fibre stress for design (psi).
S <sub>x</sub> & S <sub>y</sub>	= Section modulus about the x- or y-axis respectively (in. <sup>3</sup> ).
I <sub>x</sub> & I <sub>y</sub>	= Moment of inertia about the x- or y-axis respectively (in. <sup>4</sup> ).
k	= Stiffness of member.
K	= Bending moment constant.
c	= Distance from the neutral axis to the extreme fibre of any section (in.).
E	= Modulus of elasticity (psi x 10 <sup>6</sup> ).
Δ	= Deflection (in.).
R	= Stiffness ratio.
P <sub>r</sub>	= Load proportion factor.
F <sub>r</sub>	= Reaction factor (psi).
	Values for w (uniform load in lb/ft) are converted to lb/in. by dividing by 12

ELEMENTS OF SECTIONS

- ALUMINUM
- BRONZE
- NICKEL-SILVER
- STAINLESS
- STEEL


HANDRAILS

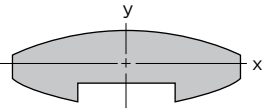

Shape	Area	Minor Axis			Major Axis		
		lx (in4)	Sx (in3)	cx (in.)	ly (in4)	Sy (in3)	cy (in.)
<span style="color: blue;">●</span> 6402	1.250	0.083	0.098	0.845	0.412	0.347	1.188
<span style="color: blue;">●</span> 6407	1.680	0.088	0.104	0.844	1.311	0.807	1.625
<span style="color: blue;">●</span> 6436†	0.741	0.159	0.268	0.594	0.422	0.386	1.094
<span style="color: blue;">●</span> 6437†	0.879	0.210	0.336	0.625	0.799	0.532	1.500
<span style="color: blue;">●</span> 6530	0.810	0.032	0.082	0.395	0.315	0.315	1.000
<span style="color: blue;">●</span> 6531	0.573	0.023	0.056	0.411	0.132	0.175	0.750
<span style="color: blue;">●</span> 6532	1.090	0.039	0.084	0.465	0.616	0.493	1.250
<span style="color: blue;">●</span> 6540	0.628	0.312	0.284	1.099	0.034	0.068	0.500
<span style="color: blue;">●</span> 6901	1.387	0.042	0.106	0.396	0.709	0.540	1.313
<span style="color: blue;">●</span> 6902	1.227	0.034	0.084	0.409	0.520	0.438	1.188
<span style="color: blue;">●</span> 6903	0.361	0.013	0.029	0.448	0.109	0.125	0.875
<span style="color: blue;">●</span> 6904	0.726	0.072	0.118	0.612	0.519	0.377	1.375
<span style="color: blue;">●</span> 6905	1.414	0.026	0.089	0.297	1.167	0.718	1.625
<span style="color: blue;">●</span> 6906	2.051	0.058	0.161	0.358	2.195	1.171	1.845
<span style="color: blue;">●</span> 6907	1.441	0.031	0.077	0.402	1.263	0.777	1.625
<span style="color: blue;">●</span> 6929	0.557	0.018	0.042	0.425	0.260	0.231	1.125
<span style="color: blue;">●</span> 6930	0.779	0.023	0.052	0.449	0.300	0.267	1.125
<span style="color: blue;">●</span> 6931	0.527	0.011	0.030	0.358	0.108	0.133	0.813
<span style="color: blue;">●</span> 6932	0.684	0.059	0.100	0.586	0.616	0.429	1.438
<span style="color: blue;">●</span> 6933	0.670	0.013	0.035	0.369	0.175	0.200	0.875
<span style="color: blue;">●</span> 6934	0.669	0.017	0.040	0.427	0.208	0.214	0.969
<span style="color: blue;">●</span> 6935	0.843	0.024	0.053	0.451	0.343	0.323	1.065
<span style="color: blue;">●</span> 6939	1.845	0.085	0.225	0.375	0.932	0.746	1.250
<span style="color: blue;">●</span> 6984	1.079	0.021	0.056	0.367	0.676	0.492	1.375
<span style="color: blue;">●</span> 6985	0.805	0.017	0.040	0.413	0.254	0.254	1.000
<span style="color: blue;">●</span> 6986	2.237	0.104	0.277	0.375	1.658	1.106	1.500
<span style="color: blue;">●</span> 6987	0.746	0.056	0.084	0.662	0.648	0.471	1.375
<span style="color: blue;">●</span> 6988	0.946	0.019	0.075	0.250	0.285	0.285	1.000
<span style="color: orange;">●</span> 4529	0.684	0.059	0.100	0.586	0.616	0.429	1.438
<span style="color: orange;">●</span> 4530 <span style="color: purple;">●</span> 5530	0.779	0.023	0.052	0.449	0.300	0.267	1.125
<span style="color: orange;">●</span> 4531	0.527	0.011	0.030	0.358	0.108	0.133	0.813
<span style="color: orange;">●</span> 4533	0.937	0.457	0.372	1.229	0.785	0.571	0.916
<span style="color: orange;">●</span> 4534 <span style="color: purple;">●</span> 5534	0.669	0.017	0.040	0.427	0.208	0.214	0.969
<span style="color: orange;">●</span> 4535 <span style="color: purple;">●</span> 5235	0.799	0.024	0.052	0.454	0.344	0.323	1.063
<span style="color: orange;">●</span> 4538 <span style="color: purple;">●</span> 5538	0.806	0.194	0.202	0.958	0.661	0.481	1.375
<span style="color: orange;">●</span> 4539	0.670	0.013	0.035	0.369	0.175	0.200	0.875
<span style="color: orange;">●</span> 4572 <span style="color: purple;">●</span> 5572	0.701	0.008	0.032	0.239	0.299	0.266	1.125
<span style="color: orange;">●</span> 4573	1.054	0.016	0.059	0.268	0.654	0.476	1.375
<span style="color: orange;">●</span> 4574 <span style="color: purple;">●</span> 5274	0.919	0.020	0.053	0.376	0.654	0.476	1.375
<span style="color: orange;">●</span> 4575	0.645	0.014	0.033	0.437	0.232	0.232	1.000
<span style="color: orange;">●</span> 6488† <span style="color: purple;">●</span> 5288†	0.426	0.011	0.044	0.250	0.152	0.152	1.000
<span style="color: orange;">●</span> 6489† <span style="color: purple;">●</span> 5289†	0.440	0.108	0.144	1.250	0.108	0.144	1.250
<span style="color: green;">●</span> 4488†	0.284	0.011	0.046	0.250	0.107	0.107	1.000
<span style="color: green;">●</span> 6501	1.054	0.017	0.067	0.256	0.629	0.457	1.375
<span style="color: green;">●</span> 6502	0.740	0.008	0.033	0.235	0.314	0.280	1.125
<span style="color: green;">●</span> 6503	0.739	0.014	0.050	0.341	0.126	0.168	0.750
<span style="color: green;">●</span> 6511†	0.386	0.006	0.031	0.238	0.189	0.137	1.375
<span style="color: green;">●</span> 6512†	0.291	0.008	0.034	0.236	0.136	0.121	1.125
<span style="color: red;">●</span> 4416	0.927	0.021	0.073	0.291	0.232	0.231	1.000
<span style="color: red;">●</span> 4428	0.569	0.017	0.041	0.416	0.209	0.215	0.969
<span style="color: red;">●</span> 4429	0.403	0.008	0.022	0.375	0.104	0.119	0.875
<span style="color: red;">●</span> 4435	0.746	0.018	0.044	0.406	0.349	0.328	1.062
<span style="color: red;">●</span> 4441	0.594	0.024	0.055	0.432	0.291	0.258	1.125

†Tubing


CARLSTADT® POSTS



Shape	Area	Minor Axis			Major Axis		
		lx (in4)	Sx (in3)	cx (in.)	ly (in4)	Sy (in3)	cy (in.)
<span style="color: blue;">●</span> 436E†	0.655	0.029	0.078	0.370	0.087	0.140	0.622
<span style="color: blue;">●</span> 6423 (423)	1.555	0.201	0.321	0.625	0.201	0.321	0.625
<span style="color: blue;">●</span> 6424 (424)	3.430	0.445	0.712	0.625	2.153	1.566	1.375
<span style="color: blue;">●</span> 6427 (427)	1.926	0.208	0.303	0.687	0.496	0.409	0.789
<span style="color: blue;">●</span> 6430 (430)†	0.726	0.096	0.192	0.500	0.241	0.297	0.813
<span style="color: blue;">●</span> 6434† <span style="color: purple;">●</span> 1334†	0.930	0.237	0.379	0.625	0.851	0.619	1.375
<span style="color: blue;">●</span> 6435† ††	0.871	0.210	0.337	0.625	0.710	0.516	1.375
<span style="color: blue;">●</span> 6458 (458)† ††	1.110	0.177	0.258	0.687	0.529	0.508	1.042
<span style="color: blue;">●</span> 6459 (459)† ††	1.030	0.201	0.322	0.687	0.708	0.679	1.041
<span style="color: orange;">●</span> 4830 (830)†	0.726	0.096	0.192	0.500	0.241	0.297	0.813
<span style="color: green;">●</span> 230†	0.308	0.050	0.100	0.500	0.095	0.126	0.750
<span style="color: green;">●</span> 233B (294)* ††	1.021	0.052	0.133	0.390	0.146	0.223	0.655
<span style="color: green;">●</span> 283 (295)* ††	1.412	0.072	0.184	0.390	0.385	0.426	0.905
<span style="color: green;">●</span> 280†	0.373	0.064	0.128	0.500	0.193	0.193	1.000

\* Aluminum, for use with stainless steel posts † Tubing †† T6 temper

GLASS RAILING SECTIONS

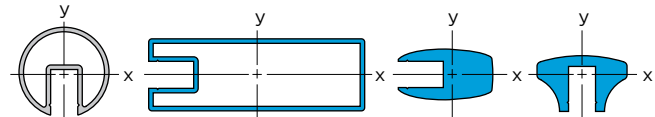

Railing Number	Area	Minor Axis			Major Axis		
		lx (in4)	Sx (in3)	cx (in.)	ly (in4)	Sy (in3)	cy (in.)
<span style="color: blue;">●</span> 1130	0.874	0.227	0.236	0.962	0.295	0.311	0.950
<span style="color: blue;">●</span> 1132 <span style="color: orange;">●</span> 1232	1.245	0.632	0.500	1.263	0.717	0.574	1.250
<span style="color: blue;">●</span> 1133	2.414	0.416	0.583	0.714	0.970	0.619	1.566
<span style="color: blue;">●</span> 1134	1.980	0.296	0.300	0.988	1.022	0.817	1.250
<span style="color: blue;">●</span> 1135	1.632	1.910	1.030	1.855	1.947	1.113	1.750
<span style="color: blue;">●</span> 1136	2.250	1.488	1.488	1.000	9.196	2.821	3.260
<span style="color: blue;">●</span> 1154	1.442	1.105	0.721	1.532	1.268	0.845	1.500
<span style="color: blue;">●</span> 1155	1.638	1.875	1.024	1.831	1.989	1.136	1.750
<span style="color: green;">●</span> 1430	0.501	0.142	0.154	0.927	0.183	0.192	0.950
<span style="color: green;">●</span> 1432 <span style="color: green;">●</span> 1452	0.643	0.358	0.280	1.280	0.395	0.316	1.250
<span style="color: green;">●</span> 1433 <span style="color: green;">●</span> 1453	0.712	0.630	0.386	1.632	0.643	0.429	1.500
<span style="color: green;">●</span> 1472 <span style="color: green;">●</span> 1473	0.909	1.570	0.867	1.811	1.520	0.762	2.000
<span style="color: orange;">●</span> 1230	0.766	0.202	0.223	0.907	0.278	0.292	0.950
<span style="color: orange;">●</span> 1233 <span style="color: purple;">●</span> 1333	1.442	1.160	0.743	1.568	1.229	0.819	1.500
<span style="color: orange;">●</span> 1235	2.360	2.704	1.471	1.838	2.772	1.584	1.750
<span style="color: purple;">●</span> 1330	0.840	0.236	0.262	0.901	0.324	0.340	0.950
<span style="color: purple;">●</span> 1332	1.245	0.632	0.500	1.263	0.717	0.574	1.250
<span style="color: blue;">●</span> 1141	4.353	6.068	4.106	1.478	2.314	1.851	1.250
<span style="color: blue;">●</span> 1142	6.828	10.206	5.449	1.873	5.121	4.097	1.250
<span style="color: blue;">●</span> 1143	7.199	12.497	6.598	1.894	6.735	4.898	1.375

Unless designated as T6 temper, all aluminum alloy is in the T52 temper. The values of these elements of sections are approximate and—while they have been ascertained with care—they cannot be guaranteed.

See page 128 for properties of Connectorail® pipe and reinforcing bars.

## BENDING MOMENTS AND STRESSES

Determination of bending moments and stress in structural railing members follows conventional engineering design procedures. The resisting moment—calculated from the Section Modulus ( $S$ , which equals  $I/c$ ) and Allowable Design Stress ( $f_s$ )—must be greater than or equal to the Applied Bending Moment ( $M$ ).

$$\frac{I}{c} \times f_s = S \times f_s = M$$

This translates into railing formulas as described below.

**RAILS:** Connections between posts and rails are assumed to be free to pivot, although in practice the rail post connection is normally not a pivot. Distribution of loads through multiple spans decreases maximum bending moment in horizontal members. The effect of different numbers of spans may be taken into account by varying the Bending Moment Constant ( $K$ ). Calculation of Unit Stress ( $f$ ) and Length of Span ( $L$ ) are accomplished by using the following formulas:

1. For uniform vertical or horizontal loads ( $w$ ):

$$M = \frac{w/12 \times L^2}{K} \quad M = S \times f$$

$$f = \frac{w/12 \times L^2}{S \times K} \quad K = 8 \text{ for one or two spans}$$

$$L = \sqrt{\frac{f \times K \times S}{w/12}} \quad K = 9.5 \text{ for three or more spans of a continuous rail}$$

2. For concentrated loads ( $F$ ) applied at mid span:

$$M = \frac{F \times L}{K} \quad M = S \times f$$

$$f = \frac{F \times L}{S \times K} \quad K = 4 \text{ for one span}$$

$$L = \frac{S \times K \times f}{F} \quad K = 5 \text{ for two or more spans of a continuous rail}$$

Values of  $K$  are defined based on the maximum bending moment developed under various numbers of spans.

**POSTS:** Posts act as vertical cantilever beams in resisting horizontal thrust applied at the top rail. Bending moment produced by horizontal thrust normally controls design, and post spacing may be calculated using the following equations.

1. For uniform horizontal loading ( $w$ ):

$$M = P \times h \quad P = w/12 \times L \quad M = S \times f$$

$$f = \frac{w/12 \times L \times h}{S} \quad L = \frac{S \times f}{w/12 \times h}$$

2. For concentrated horizontal loading ( $F_h$ ):

When concentrated loading is specified, the horizontal load on the top rail is distributed among several posts adjacent to the point of loading. The load distribution is a function of the relative stiffness of post and top rail and of the number of spans in the railing. For a straight run of railing it may be calculated with the aid of the graph on page 129. This calculation will show what proportion ( $P_f$ ) of the total load any one post may have to sustain. To the extent that it is less than 100%, it will justify the use of lighter and more economical construction. The following equation applies:

$$M = P \times h \quad P = F_h \times P_f$$

$$f = \frac{F_h \times h \times P_f}{S}$$


## RAILING FORMULAS

### INTERNALLY REINFORCED POSTS

The load-carrying capacity of a post with reinforcing insert is limited by the allowable fibre stress at one of three points.

1. The post at the top of the insert, above which it is not reinforced.
2. The insert at its base, at the highest point of its attachment to the supporting structure.
3. The post at the same point of attachment.

The lowest of these three loading limits controls design for the combined post and reinforcing insert.

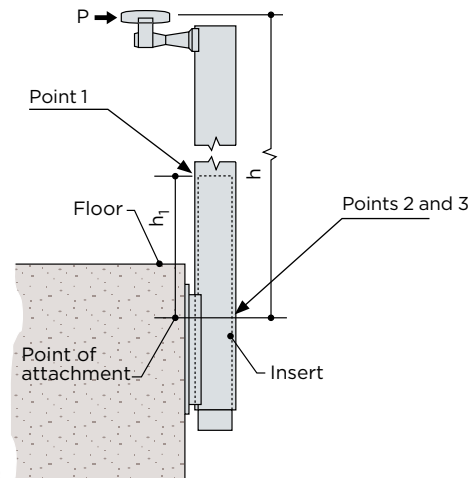

1. Post at top of insert:

Moment in post (top of insert):  $M = P \times (h - h_1)$   
Fibre stress in post (top of insert):

$$f = \frac{M}{S} = \frac{P \times (h - h_1)}{S}$$

$$\text{Loading limit: } P = \frac{f_s \times S}{h - h_1}$$

At the point of contact between the railing post and the reinforcing insert, the deflection of each is assumed to be the same but the resisting force of each is a function of its Moment of Inertia ( $I$ ) and Modulus of Elasticity ( $E$ ). The resultant combined Reaction Factor ( $F_r$ ) at the top of the insert is determined as follows:

$$F_r = \left( \frac{h}{2 \times h_1} - 0.617 \right) \div \left( \frac{E_p \times I_p}{3 \times E_r \times I_r} + 0.333 \right)$$

$E_r$  and  $I_r$  refer to the reinforcing insert  
 $E_p$  and  $I_p$  refer to the post

The loading limits for points 2 and 3 are then determined as follows:

2. Insert at base:

Moment in insert:  $M = P \times (h - h_1)$   
Fibre stress in insert

$$f = \frac{M}{S_r} = \frac{P \times F_r \times h_1}{S_r}$$

$$\text{Loading limit: } P = \frac{f_s \times S_r}{F_r \times h_1}$$

RAILING FORMULAS

3. Post at base:


$$\text{Moment in post: } M = P \times [h - (F_r \times h_1)]$$

$$\text{Fibre stress in post: } f = \frac{M}{S_p} = \frac{P \times [h - (F_r \times h_1)]}{S_p}$$

$$\text{Loading limit: } P = \frac{f_s \times S_p}{h - (F_r \times h_1)}$$

COMBINED HANDRAIL SECTIONS

When two sections of the same metal are combined by being fastened together to form a handrail (e.g. a steel moulding mounted on a steel channel), the sections develop the same deflection under load but act independently about their respective neutral axes.

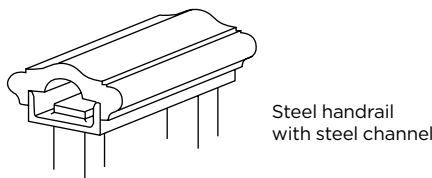

Steel handrail with steel channel

$I_a$  and  $I_b$  are the moments of inertia of the two sections. Since the Section Modulus (S) equals  $I/c$ , the combined value for S of the two sections would be:

$$S = \frac{I_a + I_b}{c_{\max}} \quad (c_{\max} \text{ is either } c_a \text{ or } c_b, \text{ whichever is greater})$$


In the railing formulas, substitute the above equation for the value of S whenever combined sections of the same material are used.

COMBINED SECTIONS OF DISSIMILAR MATERIALS

To compute the loading of combined sections of dissimilar materials (e.g. a bronze handrail mounted on a steel channel), calculations involve the determination of the relative portion of the load carried by each section. The load distribution is a function of the relative stiffness of the two sections, which is determined by the Moments of Inertia (I) and their Moduli of Elasticity (E). The distribution of the total load between two sections is determined as follows:

$$\text{Load Carried by A} = \frac{\text{Total Load}}{1 + \frac{E_b \times I_b}{E_a \times I_a}}$$

$$\text{Load Carried by B} = \text{Total Load} - \text{Total Load Carried by A}$$

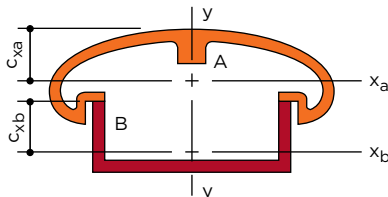

Individual calculation to determine the fibre stress for each material, using the load portion of each section, will then determine which section controls design; namely, the section giving the lesser result (see example 6 on page 127).

DEFLECTION CONSIDERATIONS

Excessive deflection of a railing under load, even though it meets strength requirements, will give the user a feeling of insecurity and may cause tripping or stumbling.

Lateral deflection of posts or vertical deflection of horizontal rails under load are computed as follows—these formulas must be used with caution:

For posts without reinforcing insert:

$$\Delta = \frac{P \times h^3}{3 \times E \times I} \quad \text{or} \quad \frac{w/12 \times L \times h^3}{3 \times E \times I}$$

For posts with reinforcing insert of similar or dissimilar material:

$$\Delta = \frac{P \times (h - h_1)^3}{3 \times E_p \times I_p} + \frac{P \times [h^3 - (h - h_1)^3]}{3 \times [(E_p \times I_p) + (E_r \times I_r)]}$$

Where  $E_p$  and  $I_p$  apply to post  
 $E_r$  and  $I_r$  apply to reinforcing insert

For rails (concentrated load, F):

$$\Delta = \frac{F \times L^3}{K \times E \times I}$$

Where K = 48 for simple span  
 66 for two or more spans, load on end span  
 87 for three or more spans, load on intermediate span

For rails (uniform load, w):

$$\Delta = \frac{5 \times w/12 \times L^4}{384 \times E \times I} \quad \text{for simple spans}$$

$$\Delta = \frac{w/12 \times L^4}{145 \times E \times I} \quad \text{for two or more spans}$$

There are few, if any, regulations or code requirements limiting deflection in a railing but ASTM has put forth the following criteria regarding Maximum Allowable Deflection ( $\Delta_{\max}$ ) in their specification E985.

For horizontal load at midspan:

$$\Delta_{\max} = h/24 + L/96$$

For horizontal load at top of post:

$$\Delta_{\max} = h/12$$

For vertical load at midspan:

$$\Delta_{\max} = L/96$$

In many instances, the anchorage of the railing to the floor, tread, or fascia is subject to a degree of rotation which will add an indeterminate amount to the deflection on the post and rail. Anchorage and supporting structure must be as secure and rigid as possible.

The equations presented have been taken from NAAMM AMP 521-01: Pipe Railing Systems Manual Including Round Tube, 4th Edition" and "NAAMM AMP 510-92: Metal Stairs Manual, 5th Edition.

These sample problems demonstrate how engineering data provided by Julius Blum & Co., Inc. can be used to obtain solutions to practical handrail design problems. Problems are solved by equating the maximum bending moment resulting from applied loading to the resisting moment determined from geometrical section properties and allowable stress. This method can be used to obtain solutions for most installation and loading conditions.

**EXAMPLE 1:**

DETERMINE MAXIMUM POST SPACING REQUIREMENTS:

Uniform load,  $w = 50$  lb/ft  
Railing height,  $h = 38$  in.

MATERIAL SPECIFIED:

Post: #423 aluminum, 6063-T52  
Allowable stress,  $f_s = 12,600$  psi (refer to page 122);  
Section modulus,  $S = .321$  in<sup>3</sup> (refer to page 123)

DETERMINE:

Maximum post spacing (simple span),  $L$  (in.)  
Resisting bending moment,  $M_{(resisting)} = f_s \times S$   
Applied bending moment,  $M_{(applied)} = w/12 \times L \times h$   
 $M_{(resisting)}$  must equal  $M_{(applied)}$

$$f_s \times S = w/12 \times L \times h$$

$$L = \frac{f_s \times S}{w/12 \times h}$$

$$L = \frac{12,600 \times .321}{50/12 \times 38}$$

$$L = 25.54 \text{ in.}$$

**EXAMPLE 2:**

DETERMINE REQUIRED SECTION MODULUS OF POST REQUIREMENTS:

Concentrated load,  $F = 200$  lbs  
Railing height,  $h = 42$  in.

MATERIAL SPECIFIED:

Post: Steel tubing  
Allowable stress,  $f_s = 16,800$  psi (refer to page 122)

DETERMINE:

Section modulus,  $S$ , and select a suitable section  
Resisting bending moment,  $M_{(resisting)} = f_s \times S$   
Applied bending moment,  $M_{(applied)} = F \times h$   
 $M_{(resisting)}$  must equal  $M_{(applied)}$

$$f_s \times S = F \times h$$

$$S = \frac{F \times h}{f_s}$$

$$S = \frac{200 \times 42}{16,800}$$

$$S = 0.500 \text{ in}^3$$

## EXAMPLE PROBLEMS AND SOLUTIONS

**EXAMPLE 3:**

DETERMINE MAXIMUM SPAN FOR HANDRAIL MOULDINGS, CONCENTRATED LOAD REQUIREMENTS:

Concentrated load,  $F = 200$  lbs

MATERIAL SPECIFIED:

Handrail moulding: #6489, 1 1/2" O.D. bronze tubing  
 $f_s = 14,500$  psi;  $S_x = .144$  in<sup>3</sup>

The railing will be installed with more than two consecutive spans, therefore the Bending Moment Constant,  $K = 5$  (refer to page 124).

DETERMINE:

Maximum span for handrail moulding,  $L$  (in.)  
Resisting bending moment,  $M_{(resisting)} = f_s \times S$

$$\text{Applied bending moment, } M_{(applied)} = \frac{F \times L}{K}$$

$M_{(resisting)}$  must equal  $M_{(applied)}$

$$f_s \times S = \frac{F \times L}{K}$$

$$L = \frac{f_s \times S \times K}{F}$$

$$L = \frac{14,500 \times .144 \times 5.0}{200} = 52.2 \text{ in.}$$

**EXAMPLE 4:**

DETERMINE MAXIMUM SPAN FOR A COMBINED HANDRAIL SECTION USING SECTIONS OF THE SAME METAL REQUIREMENTS:

Concentrated load,  $F = 200$  lbs

MATERIALS SPECIFIED:

Handrail moulding: #6932, aluminum, 6063-T52  
 $f_s = 12,600$  psi;  $I_{xa} = .059$  in<sup>4</sup>;  $c_{xa} = .586$  in.  
Support channel: 2" x 1/2" x 1/8" aluminum channel  
 $f_s = 12,600$  psi;  $I_{xb} = .006$  in<sup>4</sup>;  $c_{xb} = .369$  in.  
 $c_{max} = .586$  in. (greater of  $c_{xa}$  vs.  $c_{xb}$ )

The railing will be installed with more than two consecutive spans, therefore the Bending Moment Constant,  $K = 5$  (refer to page 124).

DETERMINE:

Maximum span for combined handrail section,  $L$  (in.)

$$\text{Resisting bending moment, } M_{(resisting)} = f_s \times \left( \frac{I_{xa} + I_{xb}}{c_{max}} \right)$$

$$\text{Applied bending moment, } M_{(applied)} = \frac{F \times L}{K}$$

$M_{(resisting)}$  must equal  $M_{(applied)}$

$$f_s \times \left( \frac{I_{xa} + I_{xb}}{c_{max}} \right) = \frac{F \times L}{K}$$

$$L = \frac{f_s \times (I_{xa} + I_{xb}) \times K}{F \times c_{max}}$$

$$L = \frac{12,600 \times (.059 + .006) \times 5.0}{200 \times .586} = 35 \text{ in.}$$

## EXAMPLE PROBLEMS AND SOLUTIONS

**EXAMPLE 5: CONCENTRATED LOAD**

## LOAD DISTRIBUTION AMONG POSTS DESCRIPTION:

Railing for an air terminal public area— heavy pedestrian traffic is expected.

## REQUIREMENTS:

Loading,  $F = 300$  lbs

Railing height = 42" at platforms;  
34" at stairs

Post height,  $h$ : Posts are fascia mounted; top of post attachment is 2" below walking surface. Therefore post height is railing height plus 2".

Maximum opening to be no more than 4"; 12 or more spans between posts.

## MATERIALS SPECIFIED:

Handrail moulding: #6901, aluminum 6063-T52

$f_s = 12,600$  psi;  $E = 10 \times 10^6$ ;  $I_y = .709$  in<sup>4</sup>;  $S_y = .540$  in<sup>3</sup>

Intermediate posts: #430, aluminum 6063-T6

$f_s = 15,200$  psi;  $E = 10 \times 10^6$ ;  $I = .241$  in<sup>4</sup>;  $S = .297$  in<sup>3</sup>

End posts:  $2\frac{1}{2}" \times 2\frac{1}{2}" \times \frac{3}{16}"$  square aluminum - 6061-T6 - tubing  
 $f_s = 19,500$  psi;  $E = 10 \times 10^6$ ;  $S = 1.247$  in<sup>3</sup>

## DETERMINE:

Structural compliance of proposed construction.

1. Stress at base of end posts (end posts are dissimilar from intermediate posts—they have to resist 100% of horizontal load):

$$f = \frac{P \times h}{S} = \frac{300 \times 44}{1.247} = 10,585 \text{ psi}$$

(19,500 psi allowable)

2. Stress at base of intermediate posts at platform ( $L = 4$  in,  $h = 44$  in.):

## A. Stiffness ratio:

$$R = \frac{E_r \times I_r}{L} \div \frac{E_p \times I_p}{h} = \frac{.709 \times 44}{4 \times .241} = 32.36$$

B. Load proportion factor: (see graph, p. 131) = 0.236

C. Load per post:  $300 \times 0.236 = 70.8$  lbs

D. Stress at base of post:

$$f = \frac{P \times h}{S} = \frac{70.8 \times 44}{.297} = 10,489 \text{ psi}$$

(15,200 psi allowable)

3. Stress at base of intermediate post at stairs ( $L = 4$  in.,  $h = 36$  in.):

## A. Stiffness ratio:

$$R = \frac{E_r \times I_r}{L} \div \frac{E_p \times I_p}{h} = \frac{.709 \times 36}{4 \times .241} = 26.47$$

B. Load proportion factor: (see graph, p. 131) = 0.248

C. Load per post:  $300 \times 0.248 = 74.4$  lbs

D. Stress at base of post:

$$f = \frac{P \times h}{S} = \frac{74.4 \times 36}{.297} = 9,018 \text{ psi}$$


(15,200 psi allowable)

4. Stress on handrail at mid-span:

$$f = \frac{F_h \times L}{S \times K} = \frac{300 \times 4}{.540 \times 5} = 444 \text{ psi}$$

(12,600 psi allowable)

Railing meets structural designer's requirements.

**EXAMPLE 6: UNIFORMLY DISTRIBUTED LOAD**

## COMBINED HANDRAIL SECTION OF DISSIMILAR MATERIALS

## DESCRIPTION:

Stair railing of steel balusters, mounted between steel channel top and bottom rails, attached to square steel posts, with a bronze handrail.

## REQUIREMENTS:

Loading,  $w = 50$  lb/ft, horizontal and vertical.

Railing height,  $h = 34"$  at stair,  $42"$  at landings.

Post spacing,  $L = 40"$ ; 3 or more spans in each run.

## MATERIALS SPECIFIED:

Handrail moulding: #4530, bronze C38500

$f_s = 9,700$  psi;  $I_x = .023$  in<sup>4</sup>;  $c_x = 0.449$  in.;  $E = 14 \times 10^6$  psi

Posts:  $1\frac{1}{2}" \times 1\frac{1}{2}" \times .140"$  structural steel tubing

$f_s = 27,700$  psi;  $S = .316$  in<sup>3</sup>

Sub-rails:  $1\frac{1}{2}" \times 1\frac{1}{2}" \times \frac{1}{8}"$  steel (C1010) channel — top and

bottom:  $f_s = 16,800$  psi;  $I_x = .005$  in<sup>4</sup>;  $c_x = 0.354$  in.;

$E = 29 \times 10^6$  psi

## DETERMINE:

Structural compliance of proposed construction

1. Stress at base of post:

$$\frac{M}{S} = \frac{w/12 \times L \times h}{S} \quad \text{At stairs:} \quad \frac{50 \times 40 \times 34}{12 \times .316} = 17,932 \text{ psi}$$

$$\text{At landings:} \quad \frac{50 \times 40 \times 42}{12 \times .316} = 22,152 \text{ psi}$$

(27,700 psi allowable)

2. Stress on rail:

Since  $I_y$  of both bronze<sub>(b)</sub> and steel<sub>(s)</sub> sections is greater than  $I_x$ , vertical load controls design.

## A. Total load:

$$w/12 \times L = \frac{50 \times 40}{12} = 167 \text{ lbs}$$

B. Load per foot on bronze,  $w_b$ :

$$w_b = w \div \left( 1 + \frac{E_s \times 2 \times I_{xs}}{E_b \times I_{xb}} \right)$$

$$w_b = 50 \div \left( 1 + \frac{29 \times 10^6 \times 2 \times .005}{14 \times 10^6 \times .023} \right) = 26.31 \text{ lb/ft}$$

C. Load per foot on steel,  $w_s$ :

$$w_s = w - w_b$$

$$w_s = 50 - 26.31 = 23.69 \text{ lb/ft}$$

D. Stress on bronze,  $f_{sb}$ :

$$f_{sb} = \frac{w_b / 12 \times L^2 \times c_{max}}{I_{xb} \times K} = \frac{26.31 / 12 \times 40^2 \times 0.449}{.023 \times 9.5}$$

$$= 7,209 \text{ psi (9,700 psi allowable)}$$

E. Stress on steel,  $f_{ss}$ :

$$f_{ss} = \frac{w_s / 12 \times L^2 \times c_{max}}{I_{xs} \times K} = \frac{23.69 / 12 \times 40^2 \times 0.354}{2 \times .005 \times 9.5}$$

$$= 11,770 \text{ psi (16,800 psi allowable)}$$

Design meets code structural requirements.

Resistance to vertical loading of upper and lower steel channels is additive. Therefore the value of  $I_{xs}$  is doubled. The additional resistance to vertical load by the truss action of the balusters has not been considered, making the result of the calculation more conservative.

MECHANICAL PROPERTIES

Material	Allowable Stress (psi)	Minimum Yield (psi)	Modulus of Elasticity (psi x 10 <sup>6</sup> )
Aluminum*			
6061-T6	19,500	35,000	10.0
6063-T52 pipe	11,300	16,000	10.0
6063-T832 pipe	24,800	35,000	10.0
Red Brass C23000	11,000	18,000	17.0
Stainless• Type 304	30,000	55,000	28.0

\*Aluminum Association Specifications for Aluminum Structures.

• American Iron & Steel Institute Stainless Steel Cold-Formed Structural Design Manual.

SECTION PROPERTIES

Connectorail® Pipe (Aluminum, Bronze, Stainless)

Nominal Size	Sched.	OD	Wall	Area	I	S
1 1/4"	10	1.660"	.109"	.531	.161	.193
1 1/4"	40	1.660"	.140"	.669	.195	.235
1 1/4"	40	1.660"	.146"	.695	.201	.242
1 1/2"	5	1.900"	.062"	.375	.158	.166
1 1/2"	10	1.900"	.109"	.614	.247	.260
1 1/2"	40	1.900"	.145"	.800	.310	.326
1 1/2"	40	1.900"	.150"	.825	.318	.335

Connectorail® Reinforcing Bars (6061-T6)

No.	Sched.	Nominal Size	OD	Area	I	S
7192	10	1 1/4"	1.427"	1.599	.204	.285
7292/7295	10	1 1/2"	1.667"	2.183	.379	.455
7492	40	1 1/4"	1.328"	1.452	.168	.247
7592/ 7595	40	1 1/2"	1.585"	1.973	.310	.391
9392**	5	1 1/2"	1.750"	.615	.205	.239

\*\* Tubing with .120" wall, type 304 Stainless Steel

CONNECTORAIL® TEST RESULTS

1 1/2" Aluminum and Stainless Steel Pipe—Single Span

Span (L) or Height (h)	RAIL								POST							
	57	75	96	96	96	96	96	96	42" w/24" re-bar	42" w/24" re-bar	42" w/24" re-bar	42" w/24" re-bar	42" w/24" re-bar	42" w/24" re-bar	42" w/24" re-bar	
Schedule	10	40	10	40	5	10	40	5	10	40	5	10	40	5		
Alloy and Temper	6063-T52	6063-T52	6063-T832	6063-T832	Type 304	6063-T832	6063-T832	Type 304	6063-T832	6063-T832	Type 304	6063-T832	6063-T832	Type 304		
Load (P)	Deflection	Permanent Set	Deflection	Permanent Set	Deflection	Permanent Set	Deflection	Permanent Set	Deflection	Permanent Set	Deflection	Permanent Set	Deflection	Permanent Set	Deflection	Permanent Set
200 lbs	.344"	.000"	.547"	.000"	1.466"	.000"	1.021"	.000"	.867"	.025"	1.389"	.000"	1.724"	.000"	1.006"	.036"
250 lbs	.388"	.000"	.669"	.000"	1.818"	.000"	1.317"	.000"	1.120"	.040"	1.659"	.000"	2.122"	.000"	1.160"	.056"
300 lbs	.496"	.000"	.845"	.000"	2.214"	.000"	1.594"	.000"	1.395"	.128"	1.926"	.000"	2.537"	.000"	1.369"	.080"
350 lbs	.565"	.000"	.998"	.000"	2.483"	.000"	1.882"	.000"	1.728"	.205"	2.206"	.000"	2.849"	.000"	1.633"	.112"
400 lbs	.739"	.047"	1.189"	.000"	2.984"	.000"	2.178"	.000"	1.992"	.322"	2.601"	.000"	3.211"	.000"		
450 lbs	1.368"	.488"	1.654"	.151"	3.464"	.047"	2.488"	.000"	2.563"	.652"	2.811"	.000"	3.603"	.000"	2.131"	.238"
500 lbs			1.990"	.656"	4.510"	.406"	2.775"	.000"	2.972"	.994"	3.122"	.000"	4.278"	.109"	2.270"	.452"
550 lbs							3.080"	.000"	4.176"	1.726"	3.484"	.000"	4.868"	.266"		
600 lbs							3.424"	.000"	5.591"	2.886"	3.860"	.146"			2.765"	
650 lbs							3.754"	.031"			4.267"	.391"				
700 lbs							4.213"	.192"							3.880"	
0.2% Specified Permanent set load	430 lbs		440 lbs		470 lbs		700 lbs		350 lbs		590 lbs		490 lbs		340 lbs	

NOTE ON WELDED PIPE RAILINGS

An important consideration for welded pipe railings is the effect of welding heat on the structural properties of aluminum handrail pipe. For example, extruded pipe of aluminum alloy 6063-T52 has an allowable design stress of 11,300 psi. After welding, the allowable stress must be reduced to 8,000 psi within 1" of the weld. Since maximum bending moment generally occurs at points of support or attachment, the reduced stress will often control design. This consideration does not apply to non-welded Connectorail®.

LOADING TABLES

The values tabulated in the following page apply to installations fabricated and erected in accordance with Connectorail® specifications and using Connectorail® components exclusively. Chart values have been determined by assuming that reinforcing inserts are included with fascia mounted railings and with railings set into the floor, except where no insert is indicated.

For these tables, various post heights have been selected arbitrarily. Values of maximum post spacing for other post heights can be interpolated easily.

When Connectorail® posts are surface-mounted on floors, treads or stringers, using a floor flange, the entire bending moment of the post is transferred to the reinforcing insert and the allowable post loading has to be computed accordingly. The allowable load will be determined by the resisting moment of the reinforcing insert alone or the unreinforced post above the insert (h - h<sub>1</sub>), whichever is less.

● ALUMINUM ● BRONZE ● STAINLESS

**CONNECTORAIL® LOAD TABLES**

Maximum Allowable Spans—Post Spacing  
Based on bending stress in post and insert  
Load: 50 lbs per foot, applied horizontally at top rail

Calculations are for a dowel of similar material

Post Material Pipe size	Post height (h)	15" insert h1 = 9"		25" insert h1 = 12" h1 = 19"	
		No insert	15" insert	h1 = 12"	h1 = 19"
● Aluminum 6063-T832 1 1/4" Sch. 10	30"	38"	55"	64"	90"
	34"	34"	46"	52"	77"
	38"	30"	40"	44"	61"
	42"	27"	35"	38"	50"
	46"	25"	31"	34"	43"
● Aluminum 6063-T832 1 1/4" Sch. 40	30"	47"	67"	74"	90"
	34"	41"	56"	64"	79"
	38"	37"	48"	54"	71"
	42"	33"	42"	47"	61"
	46"	30"	38"	41"	52"
● Aluminum 6063-T832 1 1/2" Sch. 10	30"	52"	74"	86"	134"
	34"	46"	62"	70"	104"
	38"	41"	53"	60"	82"
	42"	37"	47"	52"	68"
	46"	34"	42"	46"	58"
● Aluminum 6063-T832 1 1/2" Sch. 40	30"	65"	92"	108"	134"
	34"	57"	78"	88"	118"
	38"	51"	67"	75"	103"
	42"	46"	59"	65"	85"
	46"	42"	52"	57"	72"
● Bronze (Red Brass) C23000 1 1/4" Sch. 40	30"	21"	30"	40"	40"
	34"	18"	25"	35"	35"
	38"	16"	21"	32"	32"
	42"	15"	19"	27"	27"
	46"	13"	17"	23"	23"
● Bronze (Red Brass) C23000 1 1/2" Sch. 40	30"	29"	41"	40"	40"
	34"	25"	34"	35"	35"
	38"	23"	30"	32"	32"
	42"	21"	26"	27"	27"
	46"	19"	23"	23"	23"
● Stainless Steel Type 304 1 1/2" Sch. 5	30"	40"	100"	120"	120"
	34"	35"	75"	86"	86"
	38"	32"	60"	67"	67"
	42"	29"	50"	55"	55"
	46"	26"	43"	46"	46"

Maximum Allowable Spans—Handrail  
Based on bending stress in rail.  
Load: 50 lbs per foot


	1 or 2 spans	3 or more spans
● Aluminum 6063-T52		
1 1/4" Sch. 10	65"	71"
1 1/4" Sch. 40	71"	78"
1 1/2" Sch. 10	75"	82"
1 1/2" Sch. 40	84"	92"

If it is desired to use longer rail spans than allowed by the limits above, alloy 6063-T832 pipe should be used. Allowable rail span for 6063-T832 pipe is usually greater than allowable post spacing.

● Bronze (Red Brass) C23000		
1 1/4" Sch. 40	70"	77"
1 1/2" Sch. 40	83"	90"
● Stainless Steel Type 304		
1 1/2" Sch. 5	98"	107"

**LOAD DISTRIBUTION CONSIDERATIONS**

The graph below is used to determine railing load distribution. It has been determined by computer analysis and confirmed by laboratory test. The formula used in determining the graph assumes that all posts are of identical material and section.

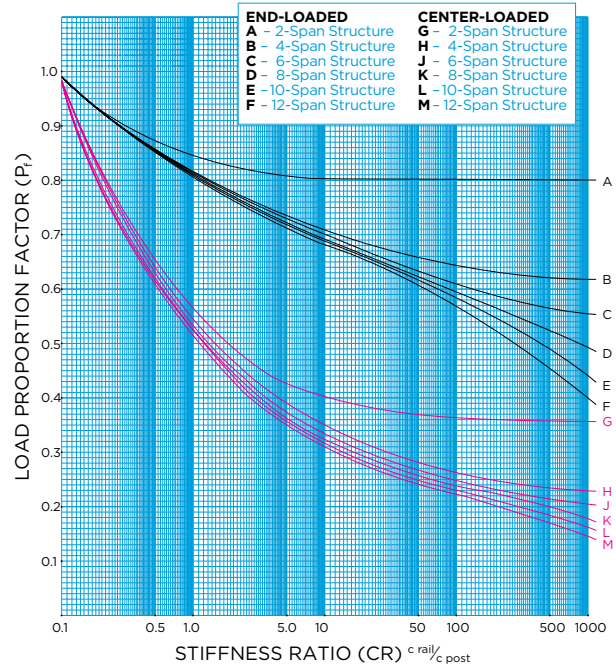

The Stiffness (C) of a rail or post is:

$$C_r = \frac{E \times I}{L} = \text{for the rail}$$

$$C_p = \frac{E \times I}{h} = \text{for the post}$$

(see page 122 for definition of symbols)

The Stiffness Ratio (CR) is determined as:  $CR = \frac{C_r}{C_p}$

The Stiffness Ratio is then plotted on the graph to obtain a Load Proportion Factor (Pf). When the load proportion factor has been determined, it is multiplied by the total load to determine the load one post must sustain.

If one or both ends of the railing are free standing, the end-loaded condition must be assumed. If both ends of the run are laterally braced by a change in direction or attachment to a firm structure, the center-loaded load proportion factor may be used.

NOTE: If end posts differ from intermediate posts in strength, the load distribution pattern becomes indeterminate and end posts should then be designed to carry 100% of the concentrated load. Intermediate posts may then be designed to the center loaded condition.

In single span railings, each post must be designed to carry the full concentrated load. When posts and rails are of identical material and section (as in pipe railing), and post spacing varies between 3' and 6' feet while post height is between 30" and 42" inches, load distribution is fairly uniform. In this situation, the greatest proportion of a concentrated load carried by any post can be estimated as follows:

End posts:		Intermediate posts:	
2-span railing	Pf = 0.85	2 span railing	Pf = 0.65
3 or more spans	Pf = 0.82	3 or more spans	Pf = 0.60

Thus, if a 200 lb concentrated load is specified for a pipe railing, actual design load to be applied at the top of the end post is .82 x 200 lb (164 lb), while design load to be applied to intermediate posts is .60 x 200 lb (120 lb). If railing posts are reinforced, the load proportion factor for posts is about 3 percentage points higher.

ITEM #	PG#						
3	54	142	24, 86, 95	214	28	273	52
4	54	142L	44	215F	29	274	52
11	54	143	24, 86, 95	216F	29	275	13, 23, 89, 91
12	54	143L	44	217	90	276	51
23L	47	144	24, 86, 87, 95	218	23, 91	277	29
24L	47	145	24, 86, 95	219	90	278	29
28L	46	147	51	220	23, 91	279	78, 82
29	48	150CC	41, 42	221	13, 23, 92	280	78, 79, 82, 123
29L	46	150CL/CR	41	222	22, 67, 89, 93	281	52
30	48	151	85, 89, 97	222L	22	282	52
30L	46	152	73, 86, 95	223	13, 23, 92	283	79, 123
33L	46	153	49	224	12, 96	284	79
36L	46	154	48	225	28	285	78
38	50	155	44	226	28	286	30
39	50	156	44	227	73, 75, 77, 79	287	30
40	50	157	44	228	79	288	30
43	50	158	49	229	79	289	30
44	50	159	49	230	78, 79, 82, 123	290	84, 89, 97, 103
47	50	160	84	231	79	291	30
48	50	161	73, 86, 95	232	28	292	30
51	50	162	73, 86, 95	233B	79, 123	293	30
53	54	163	85, 89, 96, 103	234	47, 50	294	78, 123
54	54	164	85, 96, 103	235	47	295	78, 123
63	85, 96, 103	166	22, 84, 97	236	47	296	22, 84, 97, 103
64	85, 96, 103	167	84, 97	237	78	297	51
72	52	168	22, 84, 97	238	78, 82	298	22, 84, 97, 103
73	52	169	84, 97	239	47	299	84, 97, 103
74	52	170	13, 90	240	12, 96	300	50
75	50	171	69, 82, 93	241	82, 93	302	13, 90
77	50	172	69, 82, 93	242	13, 23, 92	304	13, 90
80	50	173	69, 83, 89, 92	243	13, 83, 92	305	90
100CC	41, 42	174	69, 83, 92	245	82, 94	306	91
100CL/CR	41	175	69, 83, 92	246	82, 94	307	13, 23, 83, 92, 94
100JL/JR	40	176	13, 23, 91	247	83, 94	308	13, 23, 83, 92, 94
104	68	177	50	248	83, 94	309	34, 82, 89, 93
104-16	68	178	50	249	51	310	52
105	68	179	50	250	51	311	52
113	25, 35, 69, 87, 104	180	50	251	51	312	34, 82, 93
121L	46	181	50	252	50	313	34, 83, 89, 92, 94
123	48	182	50	253	50	314	34, 83, 92, 94
123L	47	183	45	254	50	315	90
124	48	184	45	255	51	316	23, 91
124L	47	192	23, 91	256	51	317	90
125CC	41, 42	193	90	257	51	318	23, 91
125CL/CR	41	196	22, 84, 97, 103	258	28	319	13, 23, 91
126L	46	198	45	259	28	321	13, 23, 89
128L	46	201	51	260	50	322	22, 93
129	48	202	51	261	50	323	48
129L	46	203	51	262	50	323L	46
130	48	204	51	263	50	324	48
130L	46	205	51	264	50	324L	46
131	44	206	51	265	52	325	48
132	44	207	24, 86, 95	266	52	325DL	46
134	44	208	24, 86, 95	267	50	325L	46
135	44	209	44	268	50	326L	44
136	44	210	28	269	50	327	48
137	48	211	11, 19, 28, 31	270	13, 90	327DL	46
138	48	212	29	271	13, 83, 92	327L	46
139	48	213	25, 69, 87, 104	272	52	328	48

ITEM #	PG#						
328DL	47	376	13, 23, 91	441	82, 85, 93, 96	526	62
328L	47	377	90	442	82, 93	526-R	54
329	48	378	91	443	13, 83, 92	527	62
329L	46	381	90	444	13, 83, 92	528	49
330	48	382	90, 91	448	50	529	49
330L	46	382-B	91	449	51	530	49
331	44	382-W	91	450CC	41, 42	530D	49
331L	44	383	90	450CL/CR	41	531	49
332	44	384	23, 91	451	77	531D	49
332L	44	385	90	452	50	532	49, 62
333	44	386	91	453	77	532D	49
334	48	387	90	454	50	533	49
334L	47	388	23, 91	455	51	533D	49
335	48	389	13, 23, 91	456	51	534	49
336	48	390	51	457	51	535	57
336L	47	391	51	458	74, 75, 76, 77, 82, 123	537	60
337	48	393	51	459	76, 77, 82, 123	538	60
337L	47	395	51	461	50	539	60
338	48	396	51	462	69, 82, 94	540	60
338L	47	397	51	463	69, 82, 94	541	60
339	48	398	51	464	69, 83, 94	542	59
339L	47	399	51	465	69, 83, 94	543	57
340	44, 50	400	51	467	50	544	57
341	44, 50	400CC	41, 42	468	75	545	57
342	51	400CL/CR	41	469	75	546	57
343	44	401	38	473	52	547	57
343L	44	402	22, 93	474	52	548	61
344	51	402L	22, 93	477	90	550	63
345L	44	403	13, 23	478	23, 89, 91	551	63
346	50	404	22, 93	479	50	552	63
347	51	405	13, 23	480	50	555	61
347L	44	406	52	481	50	558	61
348	52	408	71, 81	482	50	559	57
349	51	411	11, 19, 28, 31	483	50	560	57
350	51	413	25, 69, 87, 104	484	50	561	57
351	51	414	83, 94	485	50	562	57
352	50	415	83, 94	486	50	563	57
353	50	418	83, 92	495	74	564	57
354	50, 51	419	83, 92	496	76	565	57
355	51	421	71	497	90	566	57
356	51	422	71	498	23, 91	567	57
357	51	423	70, 71, 123	504	59	568	63
358	48	424	70, 71, 80, 123	510	61	569	63
359	50	425	71	511	61	570	63
360	50	425CC	41, 42	512	61	571	63
361	50	425CL/CR	41	513	61	572	63
362	50	426	71	514	61	572-R	54
363	50	427	70, 71, 123	515	61	573	63
365	52	428	73, 75, 77, 79	515B	61	574	63
366	52	429	73, 75, 77	516	64	576	62
367	50	430	72, 73, 82, 86, 95, 123, 127	517	64	577	62
368	50	431	73	518	64	578	62
369	50	432	72, 74, 76, 82	519	64	579	58
370	13, 89, 90	433	73	520	62	580	62
371	13, 90	434	50	521	62	581	62
372	90	435	72	522	62	582	62
373	29, 91	436E	72, 74, 76, 123	523	62	583	58
374	29, 91	439	82, 89, 93	524	62	584	64
375	13, 23, 91	440	82, 93	525	62	585	58

ITEM #	PG#						
586	63	708	17, 29	810	19, 28	928	28
587	63	709	44	811	11, 19, 28, 31	929	29
588	63	710	19, 28, 80, 87	813	25, 67, 69, 87, 104	930	29
589	59	711	11, 19, 28, 31, 80	824	12, 96	931	29
590	58	712	28	827	19	932	29
591	64	714	28	828	19	933	29
592	64	717	51	830	72, 73, 82, 123	934	29
593	64	718	48	831	73	936	30
594	64	719	51	833	73	937	30
595	64	720	28	835	72	938	30
596	57	723L	46	838	73	939	30
597	57	724L	46	839	73	942	28
598	57	727	19	840	12, 96	943	28
598-R	54	728	19	841	82, 93	948	28
599	57	730L	46	842	13, 23, 92	949	28
600CC	41, 42	731L	44	843	13, 83, 89, 92	951	30
600CL/CR	41	733L	46	844	13, 83, 92	952	30
601	30	735	47	862	82, 94	953	30
602	30	736L	46	863	82, 94	954	30
604	29	738L	46	864	83, 94	958	28
605	29	739L	46	865	83, 94	959	28
606	30	740	47	866	52	960	59
607	30	746	20	872	52	961	58
608	30	747	20	883	45	962	59
609	30	748	19	884	45	963	57
610	28	749	19	887	45	964	57
611	28	750	19	888	45	965	57
612	28	752	50	890	84, 97, 103	967	57
614	28	753	50	891	90	968	57
615CC	41, 42	754	50	892	23, 91	969	57
615CL/CR	41	755	19	893	90	970	49
618	28	756	19	894	23, 91	971	49
619	28	757	19	896	22, 84, 89, 97, 103	972	49
620	28	758	19	898	22, 84, 97, 103	973	49
621	90	759	29	899	84, 97, 103	983	29
622	91	760	51	901	30	984	29
625	90	763	59	903	29	985	29
626	91	765	52	904	29	986	29
650CC	41, 42	766	52	906	29	987	30
650CL/CR	41	767	50	907	29	1021	90
664	29	768	50	908	29	1022	23, 91
665	29	769	50	909	29	1026	23, 91
682	48	773	70	910	29	1087	90
682L	47	774	70, 80	911	28	1088	23, 91
683	48	775	80	912	28	1110	10, 31
683L	47	776	51	913	28	1111	10, 11
684	48	777	70	914	28	1112	10, 11
684L	47	782	21	915	28	1113	10, 11
686	44	783	21	917	28	1114	10, 11
687	44	784	21	918	28	1115	10, 11
690	51	786	20	919	28	1120	10, 31
691	51	787	20	920	28	1122	10, 31
694	51	788	20	921	30	1123	11, 31
695	51	797	51	922	30	1125	11, 31
701	30	801	13, 23, 92	923	30	1130	8, 10, 11, 123
702	30	802	22, 93	924	30	1132	8, 10, 123
703	44	803	13, 23, 92	925	28	1133	8, 35, 123
705	29	807	17, 29	926	28	1134	8, 35, 123
707	17, 29	808	17, 29	927	28	1135	8, 10, 11, 123

ITEM #	PG#				
1136	8, 10, 123	1333N	10, 31	1618	28
1137	8, 10	1334	37, 80, 119, 123	1619	28
1138	12	1334N	37, 81	1622	89, 91
1139	12	1340	16	1624	12, 96
1141	6, 123	1341	82, 89, 93	1626	91
1142	6, 123	1342	13, 23, 92	1640	12, 96
1143	6, 123	1343	13, 83, 92	1653	54
1154	8, 10, 11, 123	1350CC	41, 42	1654	54
1155	8, 10, 11, 123	1350CL/CR	41	1664	29
1160	10, 11, 31	1361	22, 82, 94	1665	29
1161	12	1362	82, 94	1922	30
1162	12	1363	10, 11, 31	1923	30
1163	10, 11, 31	1364	83, 94	1961	58
1164	10, 11, 31	1365	83, 94	1962	59
1170	10, 11, 31	1366	82, 94	1963	59
1180	10, 31	1373	17	1970	49
1181	10, 31	1374	80	1971	49
1182	10, 31	1378	91	1972	49
1186	10	1382	91	1973	49
1201	51	1386	91	1983	45
1202	51	1410	10, 31	1984	45
1203	51	1411	10, 11	1988	45
1204	51	1413	10, 11	2003	65
1205	51	1414	10, 11	2012	65
1206	51	1420	10, 31	2014	65
1210	10, 31	1423	11, 31	2015	65
1211	10, 11	1425	11, 31	2016	65
1212	10, 11	1430	8, 10, 11, 123	2017	65
1213	10, 11	1432	8, 10, 11, 123	2023	65
1214	10, 11	1433	8, 10, 11, 123	2453	54
1220	10, 31	1452	8, 10, 11, 123	2454	54
1222	10, 31	1453	8, 10, 11, 123	2515	65
1223	11, 31	1463	10, 11, 31	2524	65
1225	11, 31	1464	10, 11, 31	2528	65
1230	9, 10, 11, 123	1472	8, 10, 11, 123	2538	65
1232	9, 10, 123	1473	8, 10, 11, 31, 123	2553	54
1233	9, 10, 11, 123	1473M	10, 11	2554	54
1235	9, 10, 11, 123	1473N	10, 31	2611	65
1264	10, 11, 31	1474	10, 31	2616	65
1280	10, 31	1480	10, 31	2640	65
1281	10, 31	1482	10, 31	2653	54
1282	10, 31	1504	59	2654	54
1283	10, 31	1508	58	2717	65
1302	22, 93	1531	49	2719	65
1303	13, 23, 92	1579	58	2726	65
1306	91	1583	58	2855	65
1315CC	41, 42	1585	58	2859	65
1315CL/CR	41	1589	59	2861	65
1323	11, 31	1601	54	2866	65
1325	11, 31	1603	54	2870	65
1328	19	1604	29	2932	65
1330	9, 10, 11, 123	1605	29	2982	65
1330C	10, 16, 31	1606	30	3023	53
1330N	10, 17, 31	1607	30	3024	53
1332	9, 10, 11, 123	1609	30	3025	53
1332C	10, 31	1610	28	3033	53
1332N	10, 31	1611	28	3034	53
1333	9, 10, 11, 123	1612	28	3041	53
1333C	10, 31	1614	28	3042	53
				3043	53
				3044	53
				3045	53
				3064	53
				3073	53
				3123	53
				3124	53
				3125	53
				3126	53
				3133	53
				3134	53
				3142	53
				3143	53
				3144	53
				3145	53
				3164	94
				3243	53
				3277	53
				3323	53
				3523	53
				3524	53
				3525	53
				3526	53
				3541	53
				3542	53
				3543	53
				3544	53
				3545	53
				3601	30
				3602	30
				3604	29
				3605	29
				3607	30
				3608	30
				4024	53
				4416	38, 123
				4428	38, 40, 42, 123
				4428B	38
				4428C	38, 41, 42
				4428E	38, 40
				4428GL/GR	38, 41
				4428L	38, 40
				4428N	38
				4428S	38
				4428V	38
				4429	38, 40, 42, 123
				4429B	38
				4429C	38, 41, 42
				4429E	38, 40
				4429F	38, 40
				4429F-3	40
				4429F-4	40
				4429F-5	40
				4429F-6	40
				4429GL/GR	38, 41
				4429JL/JR	38
				4429L	38, 40
				4429N	38
				4429S	38

ITEM #	PG#				
4429SL/SR	38, 40	4534B	36	4721	114
4429T	38, 40	4534C	36, 41, 42	4724	114
4429U	38, 40	4534E	36, 40	4730	114
4429UC	38	4534GL/GR	36, 41	4732	114
4429UL	38	4534J	36	4734	114
4429V	38	4534L	36, 40	4735	114
4435	38, 123	4534BN	36	4736	114
4435V	38	4534BS	36	4744	114
4441	38, 40, 42, 123	4534T	36, 40	4750	114
4441B	38	4534V	36	4752	114
4441C	38, 41, 42	4535	36, 40, 42, 102, 123	4753	114
4441E	38, 40	4535B	36	4754	114
4441GL/GR	38, 41	4535C	41, 42	4759	114
4441N	38	4535GL/GR	36, 41	4760	114
4441S	38	4535N	36	4830	72, 73, 123
4441T	38	4535S	36	5120	55
4441U	38, 40	4535T	36, 40	5130	55
4441UC	38	4535V	36	5132	55
4441V	38	4538	9, 10, 36, 42, 123	5140	55
4445	38	4538N	36, 10	5142	55
4487	100	4539	36, 42, 102, 123	5143	55
4488	38, 42, 102, 121, 123	4539B	36	5152	55
4488N	38	4539C	36, 41, 42	5153	55
4503	36, 102	4539GL/GR	36, 41	5162	55
4506	25	4539N	36	5163	55
4507	25	4539S	36	5164	55
4519	100	4539V	36	5183	55
4520	100	4551	99	5184	55
4522	100	4552	99	5235	37, 42, 102, 123
4523	100	4553	99	5235B	37
4524	100	4553Q	99	5235C	37, 41, 42
4526	101	4555	99	5235GL/GR	37, 41
4527	101	4556	99	5235N	37
4529	36, 42, 123	4557	99	5235S	37
4529N	36	4558	99	5235V	37
4530	36, 40, 42, 123, 127	4559	99	5264	22, 84, 97, 103
4530B	36	4563	99	5274	37, 42, 102, 123
4530C	36, 41, 42	4564	99	5274C	37, 41, 42
4530E	36, 40	4565	101	5274N	37
4530GL/GR	36, 41	4566	99	5288	37, 42, 102, 119, 123
4530J	36	4569	99	5288N	37
4530L	36, 40	4572	36, 42, 123	5289	11, 31, 37, 42, 102, 119, 123
4530N	36	4572C	36, 41, 42	5289N	37, 31
4530S	36	4572N	36	5320	55
4530T	36, 40	4573	36, 42, 123	5325	55
4530V	36	4573C	36, 41, 42	5330	55
4531	36, 40, 42, 123	4573N	36	5335	55
4531B	36	4574	36, 42, 102, 123	5340	55
4531C	36, 41, 42	4574C	36, 41, 42	5364	22, 84, 97, 103
4531E	36, 40	4574N	36	5411	55
4531GL/GR	36, 41	4575	36, 42, 102, 123	5415	55
4531J	36	4575C	36, 41, 42	5440	55
4531L	36, 40	4575N	36	5530	37, 42, 123
4531N	36	4579	99	5530B	37
4531S	36	4589	99	5530C	37, 41, 42
4531U	36, 40	4590	100	5530GL/GR	37, 41
4531V	36	4596	100	5530N	37
4533	9, 36, 123	4598	100	5530S	37
4534	36, 40, 42, 123	4599	99	5530V	37
				5534	37, 42, 123
				5534B	37
				5534C	37, 41, 42
				5534GL/GR	37, 41
				5534N	37
				5534S	37
				5534V	37
				5538	9, 10, 37, 42, 123
				5538N	37, 10
				5563	99
				5564	99
				5569	99
				5569X	99
				5572	37, 42, 123
				5572C	37, 41, 42
				5572N	37
				5579	99
				5589	99
				5599	99
				5615	55
				5620	55
				5625	55
				5630	55
				5632	55
				5635	55
				5640	55
				5642	55
				5643	55
				5650	55
				5652	55
				5653	55
				5660	55
				5663	55
				5664	55
				5683	55
				5684	55
				5720	55
				5730	55
				5740	55
				5784	55
				5820	55
				5830	55
				5840	55
				5863	55
				5864	55
				5883	55
				5884	55
				5920	55
				5925	55
				5930	55
				5933	55
				5935	55
				5940	55
				5943	55
				5944	55
				5963	55
				6063-T52	31
				6102	104
				6105	104

ITEM #	PG#				
6121	9, 105	6571	99	6931N	34
6130	105	6572	99	6931S	34
6140	105	6579	99	6931T	34, 40
6201	54	6589	99	6931V	34
6203	54	6599	99	6932	35, 42, 123, 126
6402	34, 42, 85, 97, 101, 123	6601	54	6932B	35
6402C	34	6603	54	6932C	35, 41, 42
6402N	34	6642	105	6932N	35
6405	34, 42, 85, 97	6643	105	6932S	35
6405C	34	6645	105	6933	34, 42, 101, 123
6405N	34	6646	105	6933B	34
6407	34, 42, 85, 97, 123	6647	105	6933C	34, 41, 42
6407C	34	6901	34, 42, 123, 127	6933GL/GR	34, 41
6407N	34	6901C	34, 41, 42	6933N	34
6423	35, 70, 71, 112, 123	6901N	34	6933S	34
6424	35, 70, 71, 80, 112, 123	6902	34, 42, 123	6933V	34
6427	70, 71, 123	6902C	34, 41, 42	6934	34, 40, 42, 123
6430	72, 73, 85, 86, 95, 96, 123	6902N	34	6934B	34
6431	59	6903	35, 123	6934C	34, 41, 42
6432	59	6904	35, 123	6934E	34, 40
6433	59	6905	24, 34, 42, 85, 94, 96, 123	6934GL/GR	34, 41
6434	35, 42, 70, 71, 80, 81, 112, 123	6905C	34, 41, 42	6934L	34, 40
6434C	35, 42	6905N	34	6934N	34
6434N	35, 81	6906	34, 42, 123	6934S	34
6435	35, 42, 80, 82, 123	6906C	34, 41, 42	6934T	34, 40
6435C	41, 42	6906N	34	6934V	34
6435N	81	6907	34, 42, 123	6935	34, 40, 42, 101, 123
6436	35, 42, 123	6907C	34, 41, 42	6935B	34
6437	35, 42, 87, 101, 113, 123	6907N	34	6935C	34, 41, 42
6446	20	6910	100	6935E	34, 40
6458	74, 75, 123	6913	101	6935GL/GR	34, 41
6459	76, 77, 123	6914	100	6935N	34
6473	105	6915	100	6935S	34
6474	105	6916	100	6935T	34, 40
6488	36, 42, 102, 117, 123	6921	100	6935V	34
6489	11, 31, 36, 42, 102, 117, 123, 126	6922	100	6939	35, 101, 112, 123
6489C	31, 41, 42	6923	100	6948	100
6489D	31	6924	100	6952	104
6489N	31	6925	100	6955	104
6501	38, 123	6926	100	6958	104, 111
6502	38, 12	6927	101	6959	104
6503	38, 102, 123	6929	34, 40, 42, 123	6960	104
6511	38, 42, 102, 123	6930	34, 35, 40, 42, 123	6961	101
6511N	38	6930B	34	6963	99
6512	38, 42, 102, 123	6930C	34, 41, 42	6964	99
6512N	38	6930E	34, 40	6967	99
6513	38	6930GL/GR	34, 41	6969	99
6513N	38	6930J	34	6970	99
6530	34, 42, 68, 123	6930L	34, 40	6971	99
6530C	34, 41, 42, 68	6930N	34	6973	99
6530N	34, 68	6930S	34	6975	99
6531	34, 42, 68, 123	6930T	40	6979	99
6531C	34, 41, 42, 68	6930V	34	6984	34, 42, 101, 123
6531N	34, 68	6931	34, 40, 42, 123	6984C	34, 41, 42
6532	34, 42, 67, 68, 123	6931B	34	6984N	34
6532C	34, 41, 42, 68	6931C	34, 41, 42	6985	34, 42, 101, 123
6532N	34, 68	6931E	34, 40	6985C	34, 41, 42
6540	68, 123	6931GL/GR	34, 41	6985N	34
6569	99	6931L	34, 40	6986	35, 101, 112, 123
				6987	35, 42, 123
				6987C	35, 41, 42
				6987N	35
				6988	35, 101, 112, 123
				6989	99
				6997	101
				6998	100
				6999	99
				7063	11, 31
				7103	16, 80
				7104	16, 80
				7109	18
				7110	16
				7111	18
				7112	18
				7115	18
				7118	18
				7119	18
				7120	16
				7122	18
				7125	18
				7128	18
				7130	18
				7139	18
				7140	15, 16
				7141	16
				7142	18
				7145	18
				7148	18
				7150	16
				7160	25
				7161	22, 25, 82, 94
				7162	22, 80
				7163	16
				7164	22, 84, 97
				7170	19
				7173	18
				7179	18
				7180	17, 81
				7181	17, 29
				7182	18
				7185	18
				7188	18
				7190	19
				7191	19
				7192	20, 128
				7203	16, 80
				7204	16, 80
				7205	18
				7206	18
				7207	18
				7208	18
				7209	18
				7210	10, 16, 31
				7211	18
				7212	18
				7215	18
				7216	18
				7218	18

ITEM #	PG#						
7219	18	7444	18	7585	18	9373	17
7220	16	7445	18	7588	18	9379	18
7222	18	7448	18	7592	20, 128	9380	10, 17, 31
7225	18	7450	16	7593	19	9382	18
7228	18	7451	18	7594	19	9385	18
7230	18	7460	25, 87	7595	20, 128	9388	18
7239	18	7460-5	25, 87	8106	25, 69, 104	9390	19
7240	16	7462	22, 80	8107	25, 69, 104	9391	19
7241	16	7463	16	8206	25, 69, 104	9392	20, 128
7242	18	7471	19	8207	25, 69, 104	9977	90
7243	18	7473	17	8610	16	56425	55
7244	18	7473-3	17	8640	16	56525	55
7245	18	7479	18	8661	22, 25, 82, 94		
7248	18	7480	17, 81	8673	17		
7250	16	7481	17, 29	8708	25, 69, 104		
7260	25, 87	7482	18	8709	8		
7261	22, 25, 82, 94	7485	18	8710	6		
7262	22, 80	7488	18	8711	6		
7263	16	7492	20, 128	8713	8		
7264	22, 84, 97	7503	16, 80	8714	8		
7270	19	7504	16, 80	8715	8		
7271	19	7505	18	8716	8		
7273	17	7506	18	8738	9		
7279	18	7507	18	8810	16		
7280	10, 17, 31, 81	7508	18	8840	16		
7281	17, 29	7509	18	8861	22, 25, 82, 94		
7282	18	7510	16	8864	22, 84, 97, 103		
7285	18	7511	17	8873	17		
7288	18	7512	18	8893	19		
7290	19	7515	18	8894	19		
7291	19	7516	18	8964	22, 84, 97, 103		
7292	20, 128	7518	18	9161	22, 25, 82, 94		
7293	19	7519	18	9164	22, 84, 97		
7294	19	7520	16	9305	18		
7295	20, 128	7522	18	9309	18		
7403	16, 80	7525	18	9310	10, 16, 31		
7404	16, 80	7528	18	9311	17		
7405	18	7530	17	9312	18		
7406	18	7539	18	9315	18		
7407	18	7540	16	9316	18		
7408	18	7541	16	9318	18		
7409	18	7542	18	9319	18		
7410	16	7543	17	9322	18		
7411	17	7544	18	9325	18		
7412	18	7545	18	9328	18		
7415	18	7548	18	9330	17		
7416	18	7550	16	9339	18		
7418	18	7551	18	9340	16		
7419	18	7560	25, 87	9341	16		
7420	16	7560-5	25, 87	9342	18		
7422	18	7562	22, 80	9344	18		
7425	18	7563	16	9345	18		
7428	18	7565	25	9348	18		
7430	17	7571	19	9361	22, 25, 82, 94		
7439	18	7573	17	9362	22		
7440	16	7579	18	9363	10, 11, 16, 31		
7441	16	7580	17, 81	9364	22, 84, 97, 103		
7442	18	7581	17, 29	9371	19		
7443	17	7582	18	9372	17		
						1/4"-20 x 1" SEMS	16, 21
						1/4"-20 x 2 1/2" RHMS	21
						1/4"-20 x 3" RHMS	21
						3/8" x 2" aluminum lag screw	85, 94
						3/8" x 2" brass lag screw	45, 85, 94
						3/8" x 2" stainless steel lag screw	85, 94
						3/8" x 2" nickel-silver lag screw	45, 85, 94
						3/8" x 3" steel hanger bolt	85, 94
						5/16" x 1 1/2" post bracket hanger bolt	85, 94
						3/8" x 3" sleeve anchor bolt	21, 27
						A25-140 threaded rivet	21
						A25-200 threaded rivet	21
						Arc-Fit Pipe Notcher	28
						Heavy-duty double machine bolt anchors	85, 94
						Rivet heading tool	21, 26
						Scotch-Weld® epoxy	21, 26, 31





B

B

B

B



B

B

B

B

B



B

B

B

B



B

B

B

B

B



B

B

B

B



B


B

B

B

B



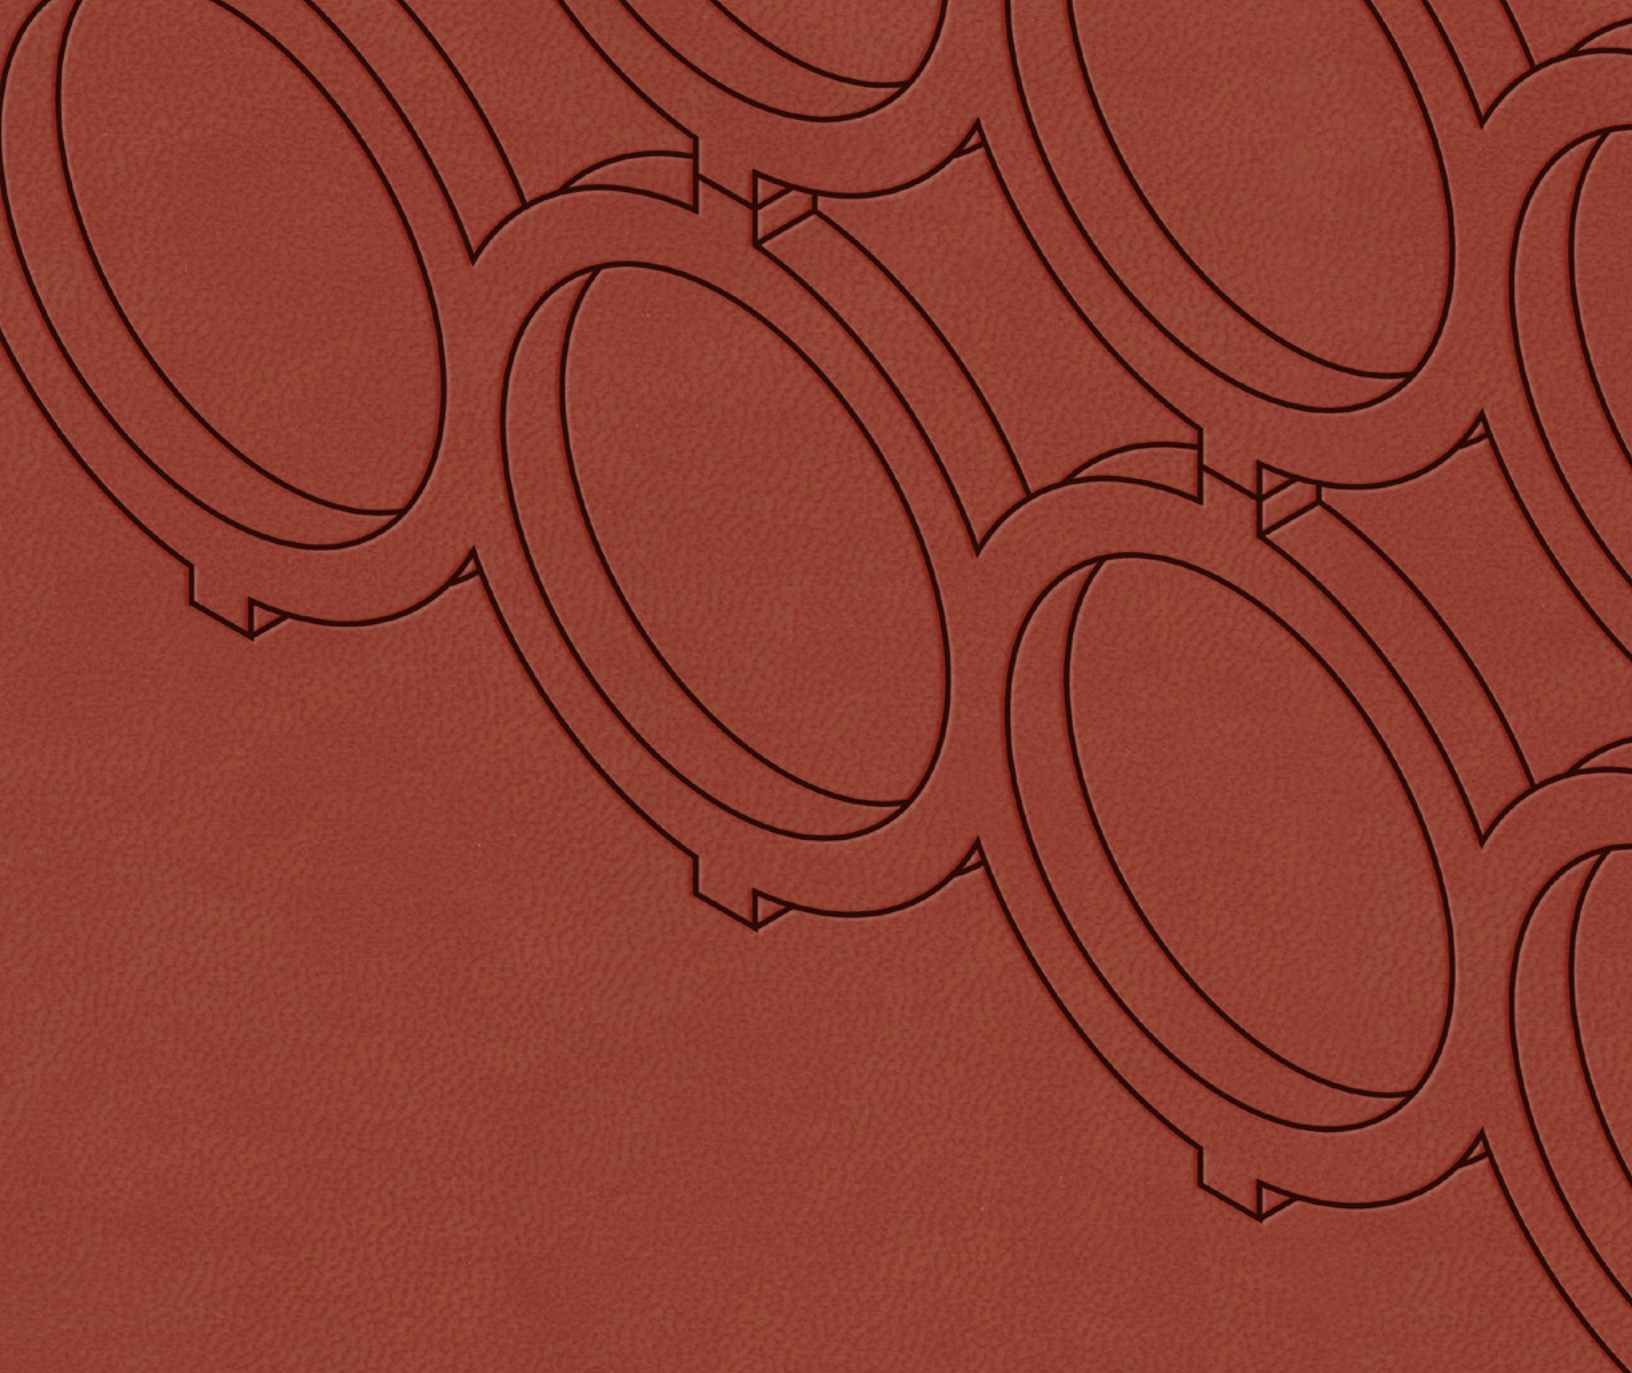

**JULIUS BLUM & CO. INC.**

Stock Components for Architectural Metal Work

Juliusblum.com  
800.526.6293